Beebe Draw Cattle CO 32-15 #1 - Proposed WBD (P&A)

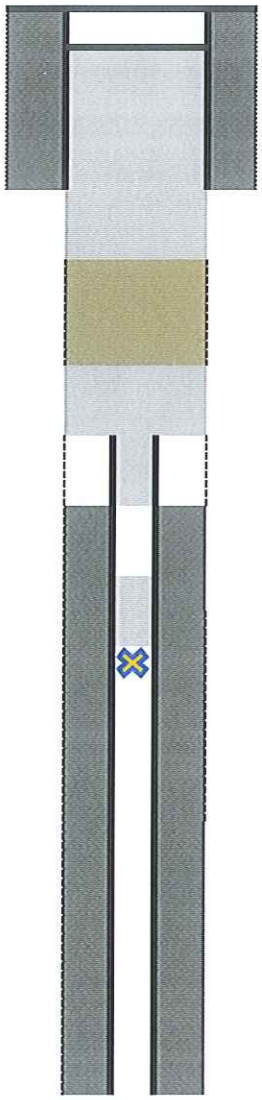

(ft KB)	
8'	Ground level/Top of surface casing cement
13'	Welded Cap/Top of cement plug
513'	Bottom of surface casing/Bottom of surface casing cement
570'	Bottom of cement plug Top of drilling mud column
	Bottom of drilling mud column Cement plug top ~100' above 5-1/2" casing stub
	Cement plug bottom ~100' below 5-1/2" casing stub
4,658'	Top of production casing cement
4,901'	Top of cement plug
4,935'	CIBP
4,982' **Sussex** 5,056'	
5,093'	PBMD
5,153'	MTD/ Bottom of production casing cement