

T5S, R96W, 6th P.M.

Encana OIL & GAS (USA) INC.

Well location, WF03D-30 125 596 (SURFACE LOCATION), located as shown in Lot 4 (Tract 37) of Section 25, T5S, R96W, 6th P.M., Garfield County, Colorado.

BASIS OF ELEVATION


SPOT ELEVATION AT THE NORTHWEST CORNER OF SECTION 30, T5S, R95W, 6th P.M. TAKEN FROM THE FORKED GULCH QUADRANGLE, COLORADO, GARFIELD COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5966 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

Sheet 1k of 10

LINE TABLE		
LINE	BEARING	LENGTH
L1	N00°10'29"E	495.12'
L2	S46°03'00"W	1141.14'

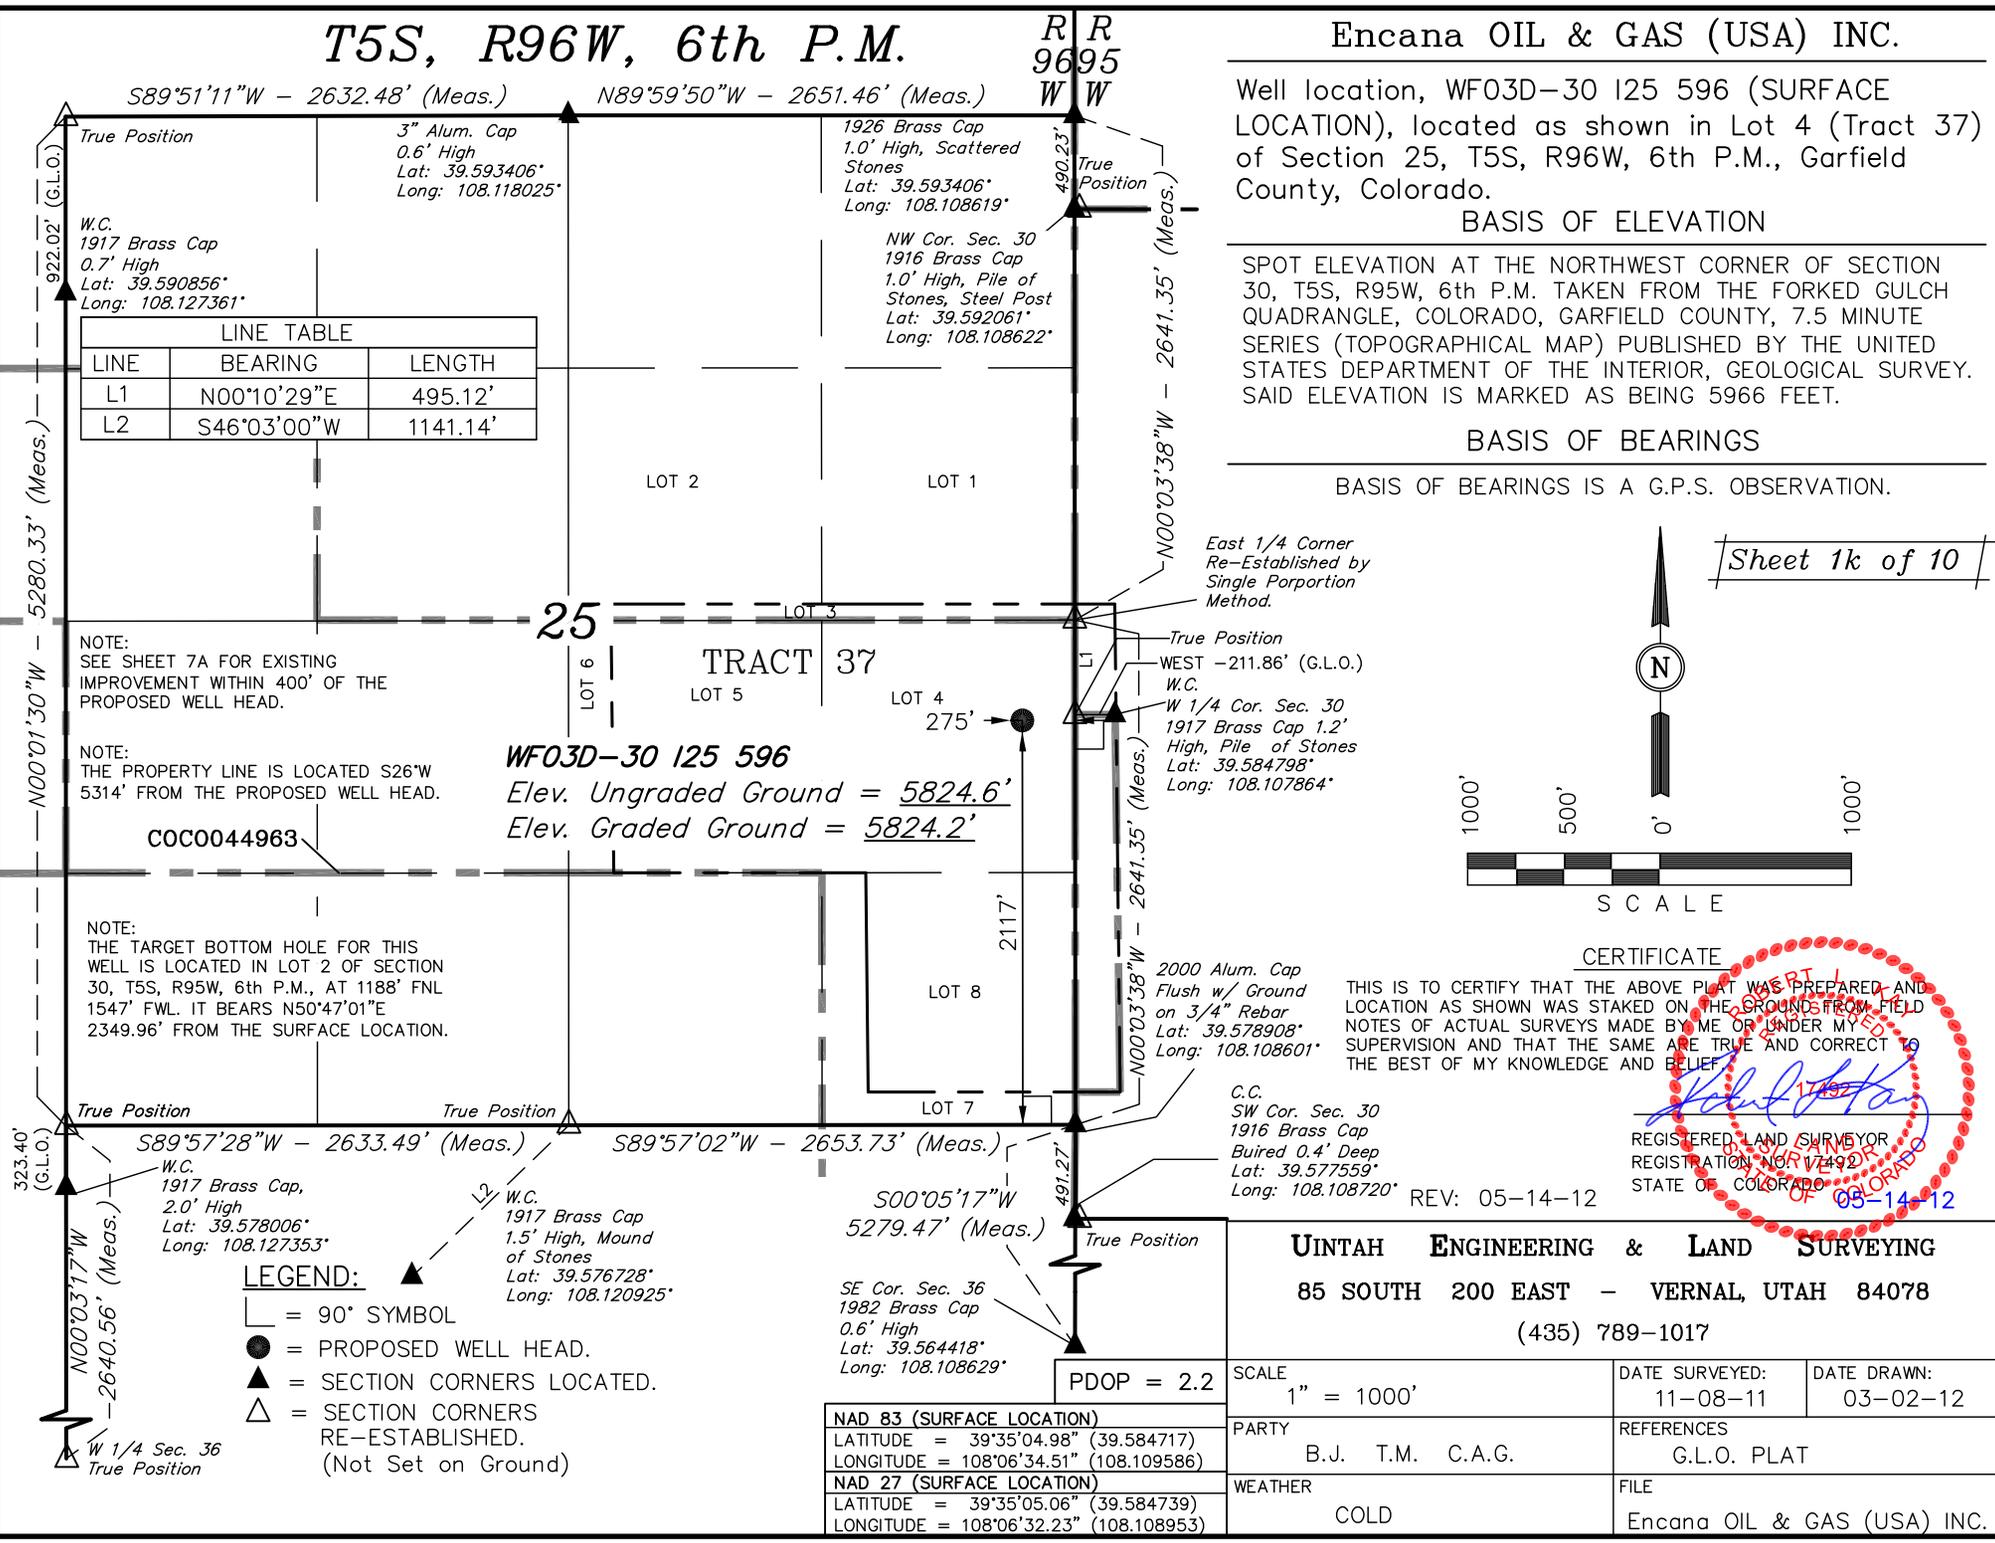

NOTE:
SEE SHEET 7A FOR EXISTING IMPROVEMENT WITHIN 400' OF THE PROPOSED WELL HEAD.

NOTE:
THE PROPERTY LINE IS LOCATED S26°W 5314' FROM THE PROPOSED WELL HEAD.

NOTE:
THE TARGET BOTTOM HOLE FOR THIS WELL IS LOCATED IN LOT 2 OF SECTION 30, T5S, R95W, 6th P.M., AT 1188' FNL 1547' FWL. IT BEARS N50°47'01"E 2349.96' FROM THE SURFACE LOCATION.

East 1/4 Corner Re-Established by Single Porportion Method.

True Position
WEST -211.86' (G.L.O.)
W.C.
W 1/4 Cor. Sec. 30
1917 Brass Cap 1.2' High, Pile of Stones
Lat: 39.584798°
Long: 108.107864°

2000 Alum. Cap
Flush w/ Ground on 3/4" Rebar
Lat: 39.578908°
Long: 108.108601°

C.C.
SW Cor. Sec. 30
1916 Brass Cap
Bured 0.4' Deep
Lat: 39.577559°
Long: 108.108720°

SE Cor. Sec. 36
1982 Brass Cap
0.6' High
Lat: 39.564418°
Long: 108.108629°

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED AND LOCATION AS SHOWN WAS STAKED ON THE GROUND FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

CERTIFICATE
[Signature]
REGISTERED LAND SURVEYOR
REGISTRATION NO. 17492
STATE OF COLORADO
REV: 05-14-12

UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

- LEGEND:**
- ◻ = 90° SYMBOL
 - = PROPOSED WELL HEAD.
 - ▲ = SECTION CORNERS LOCATED.
 - △ = SECTION CORNERS RE-ESTABLISHED. (Not Set on Ground)

NAD 83 (SURFACE LOCATION)	
LATITUDE	= 39°35'04.98" (39.584717)
LONGITUDE	= 108°06'34.51" (108.109586)
NAD 27 (SURFACE LOCATION)	
LATITUDE	= 39°35'05.06" (39.584739)
LONGITUDE	= 108°06'32.23" (108.108953)

SCALE 1" = 1000'	DATE SURVEYED: 11-08-11	DATE DRAWN: 03-02-12
PARTY B.J. T.M. C.A.G.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE Encana OIL & GAS (USA) INC.	

