





Project: Mamm Creek
Site: J24 Pad
Well: ALP 24-2CC
Wellbore: OH
Design: Plan #1





SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	200.0	0.00	0.00	200.0	0.0	0.0	0.00	0.00	0.0	
3	920.9	21.63	337.61	903.9	124.3	-51.2	3.00	337.61	134.4	
4	5062.7	21.63	337.61	4754.2	1535.7	-632.7	0.00	0.00	1660.9	
5	6144.0	0.00	0.00	5810.0	1722.2	-709.5	2.00	180.00	1862.6	ALP 24-2CC TGT
6	8169.0	0.00	0.00	7835.0	1722.2	-709.5	0.00	0.00	1862.6	ALP 24-2CC PBHL (1,038' FNL, 2,537' FWL)
7	8269.0	0.00	0.00	7935.0	1722.2	-709.5	0.00	0.00	1862.6	

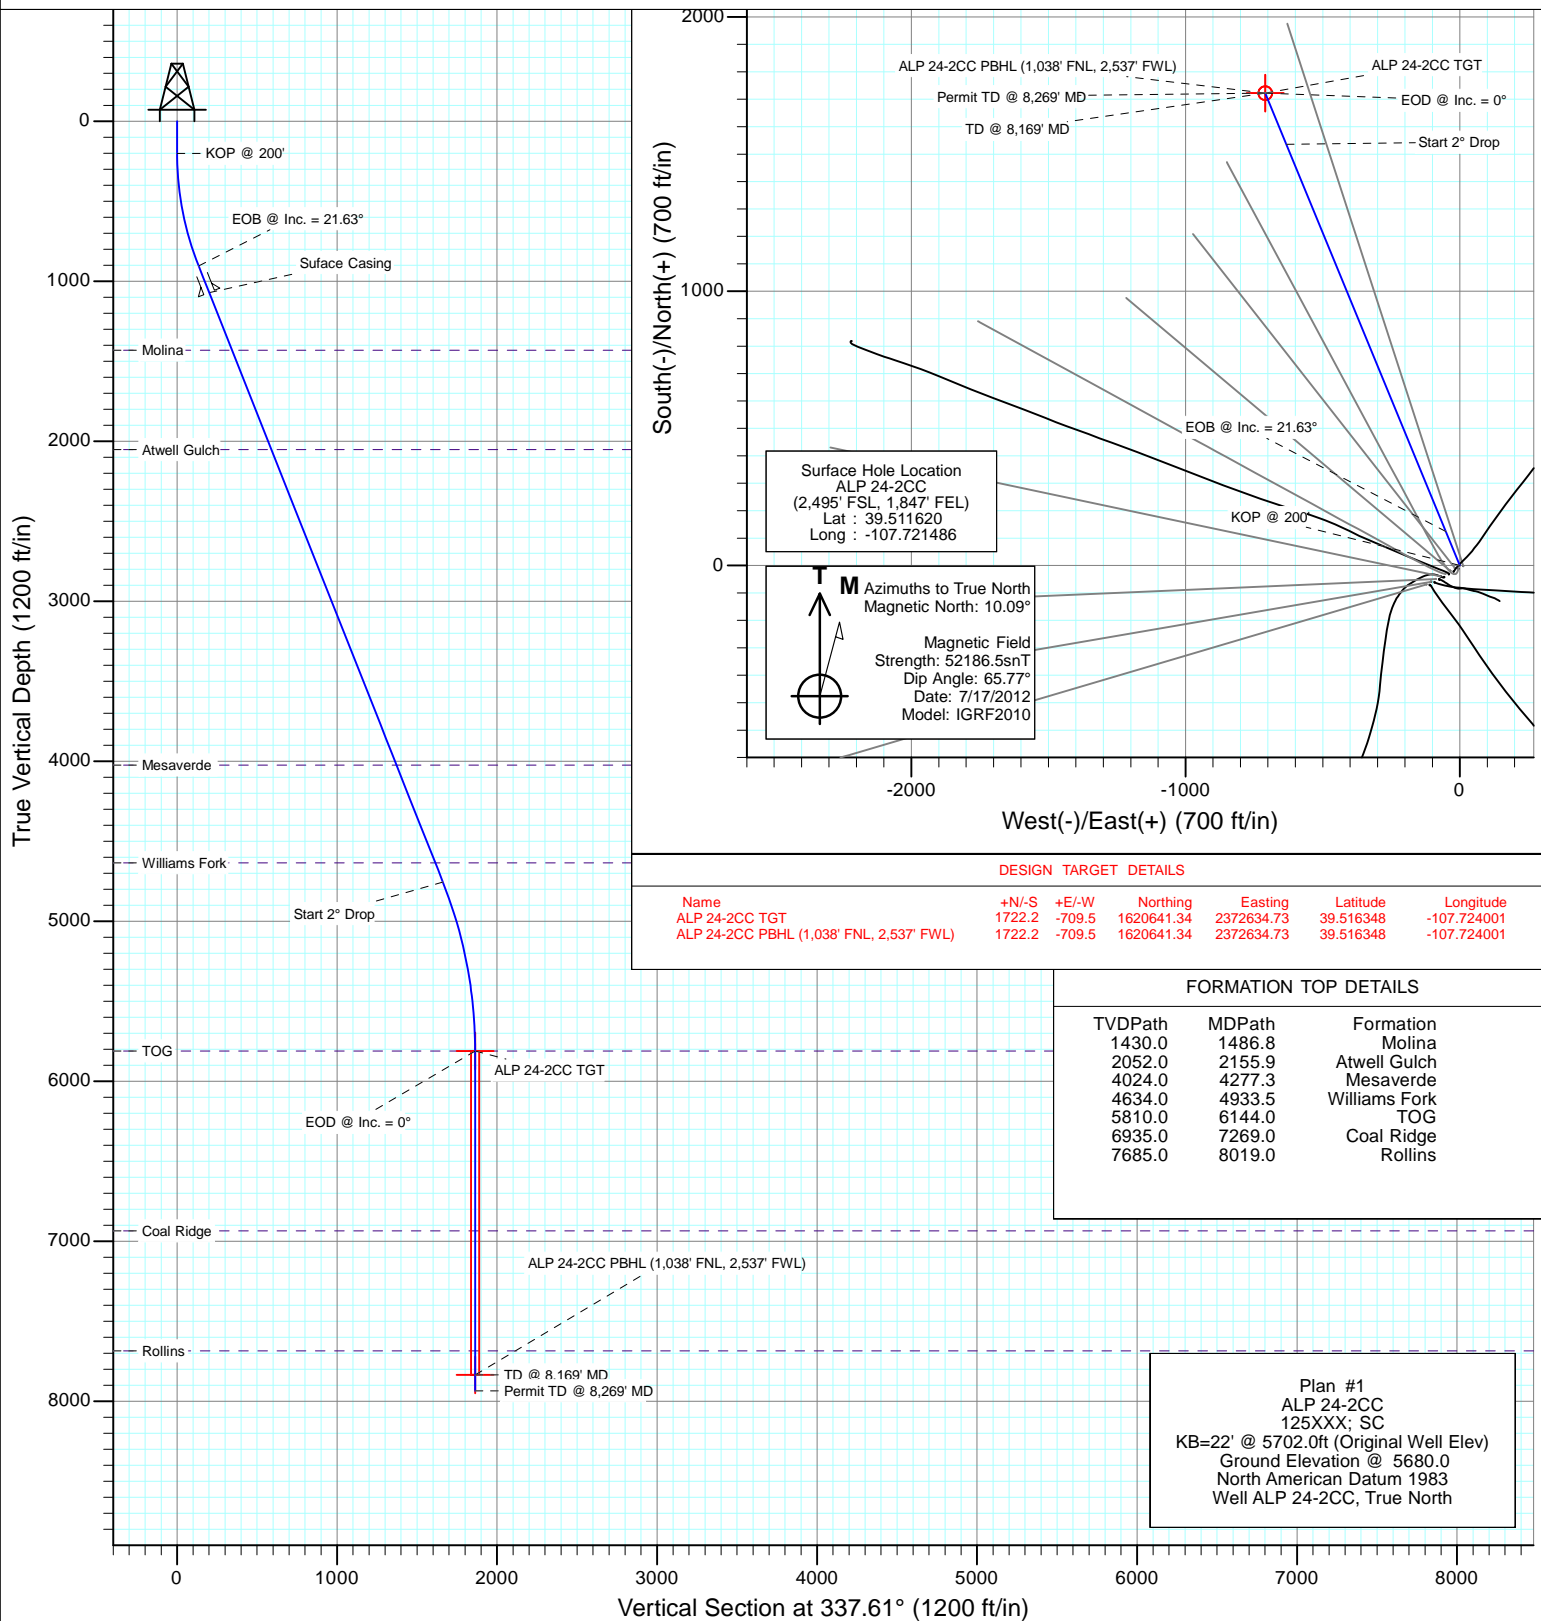

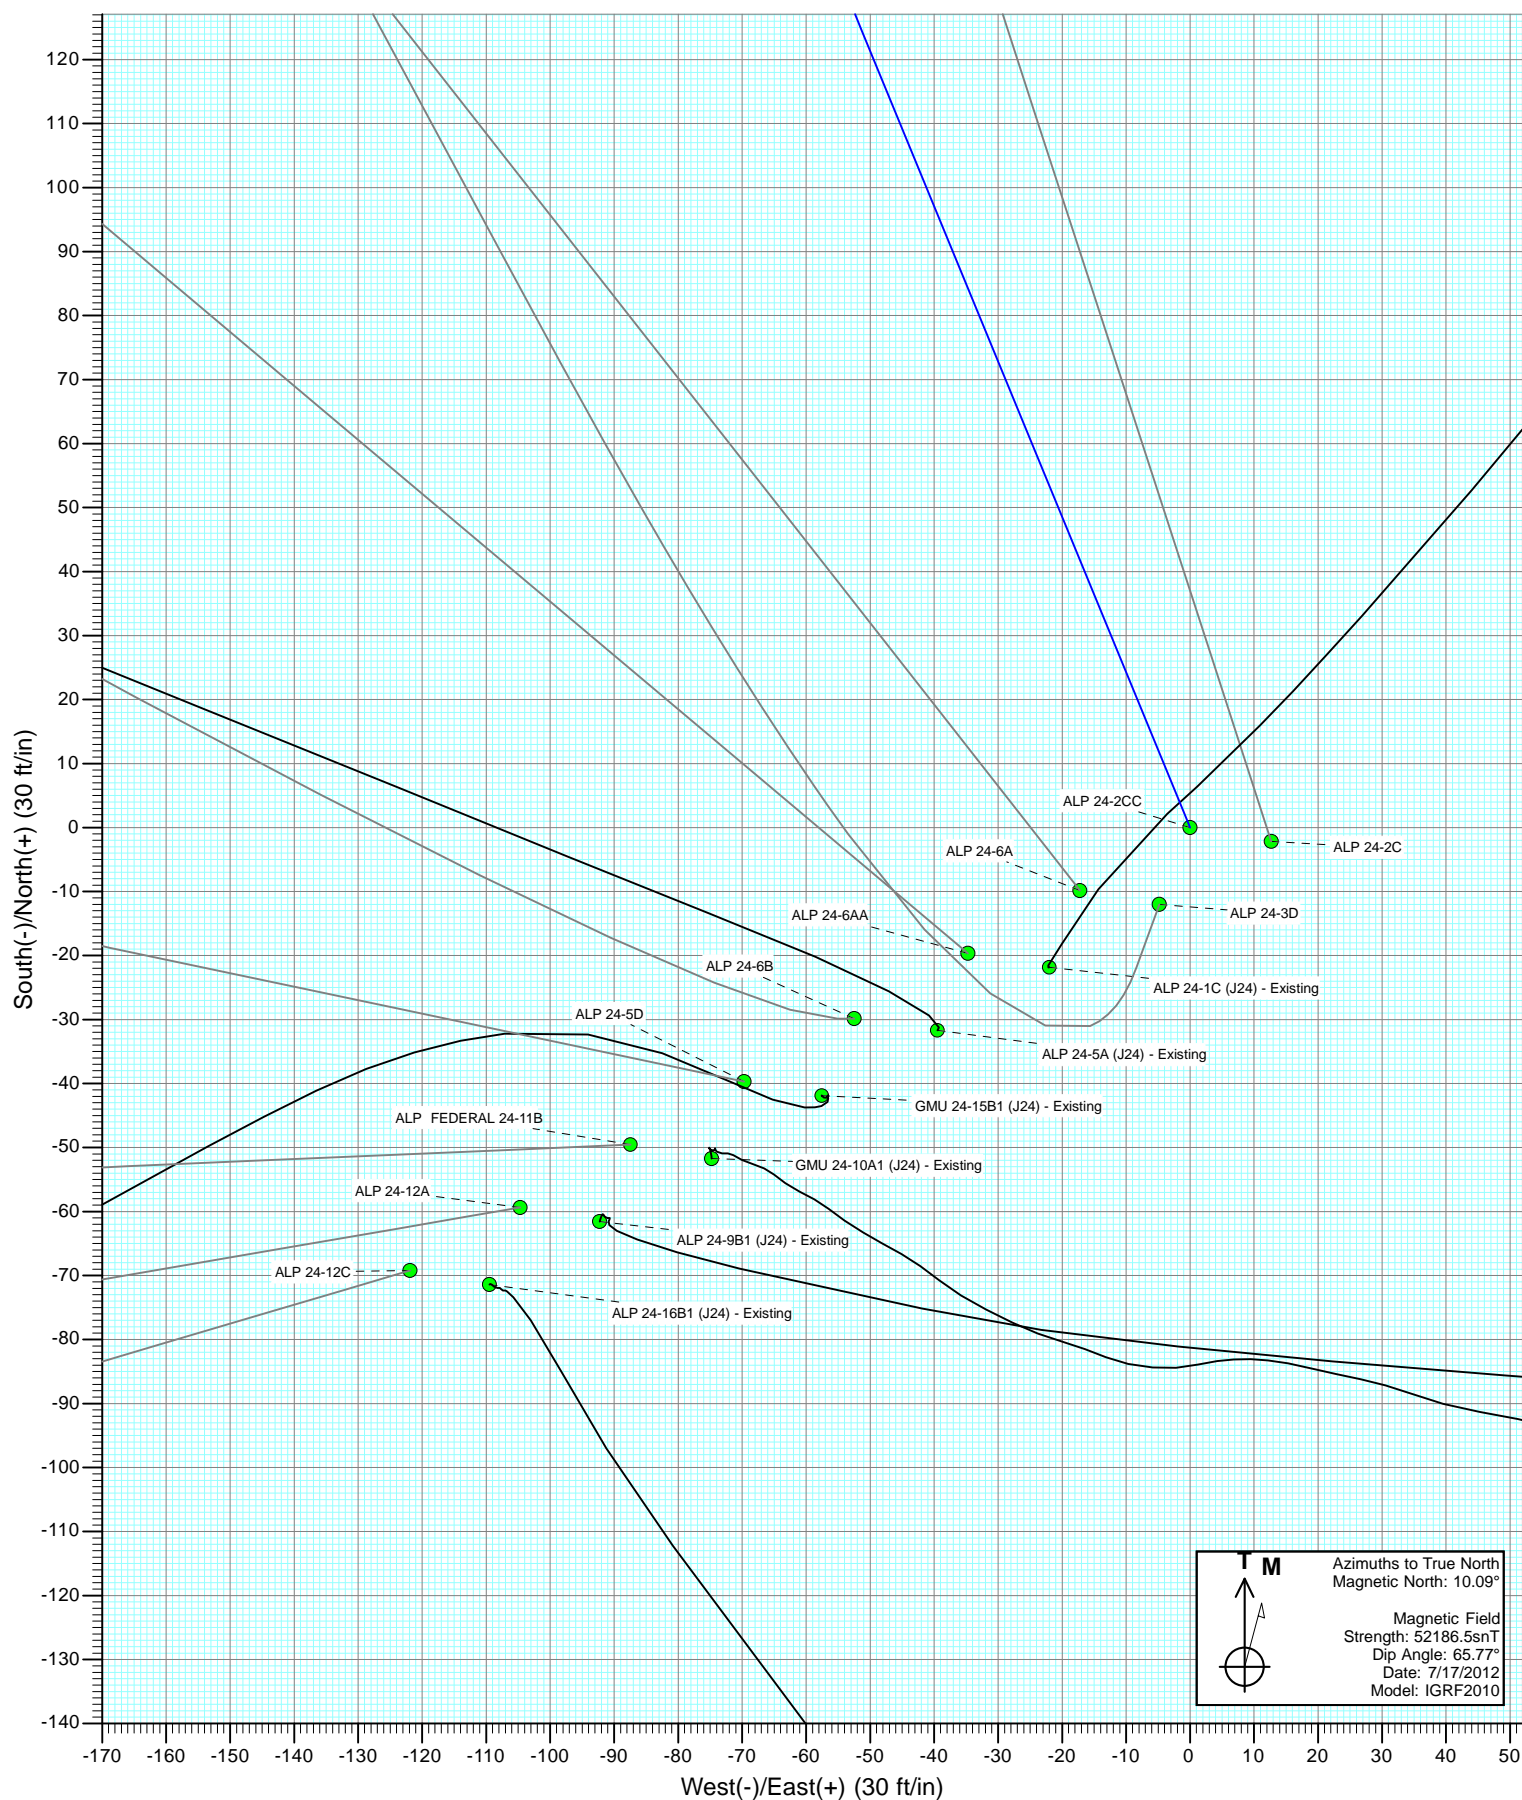

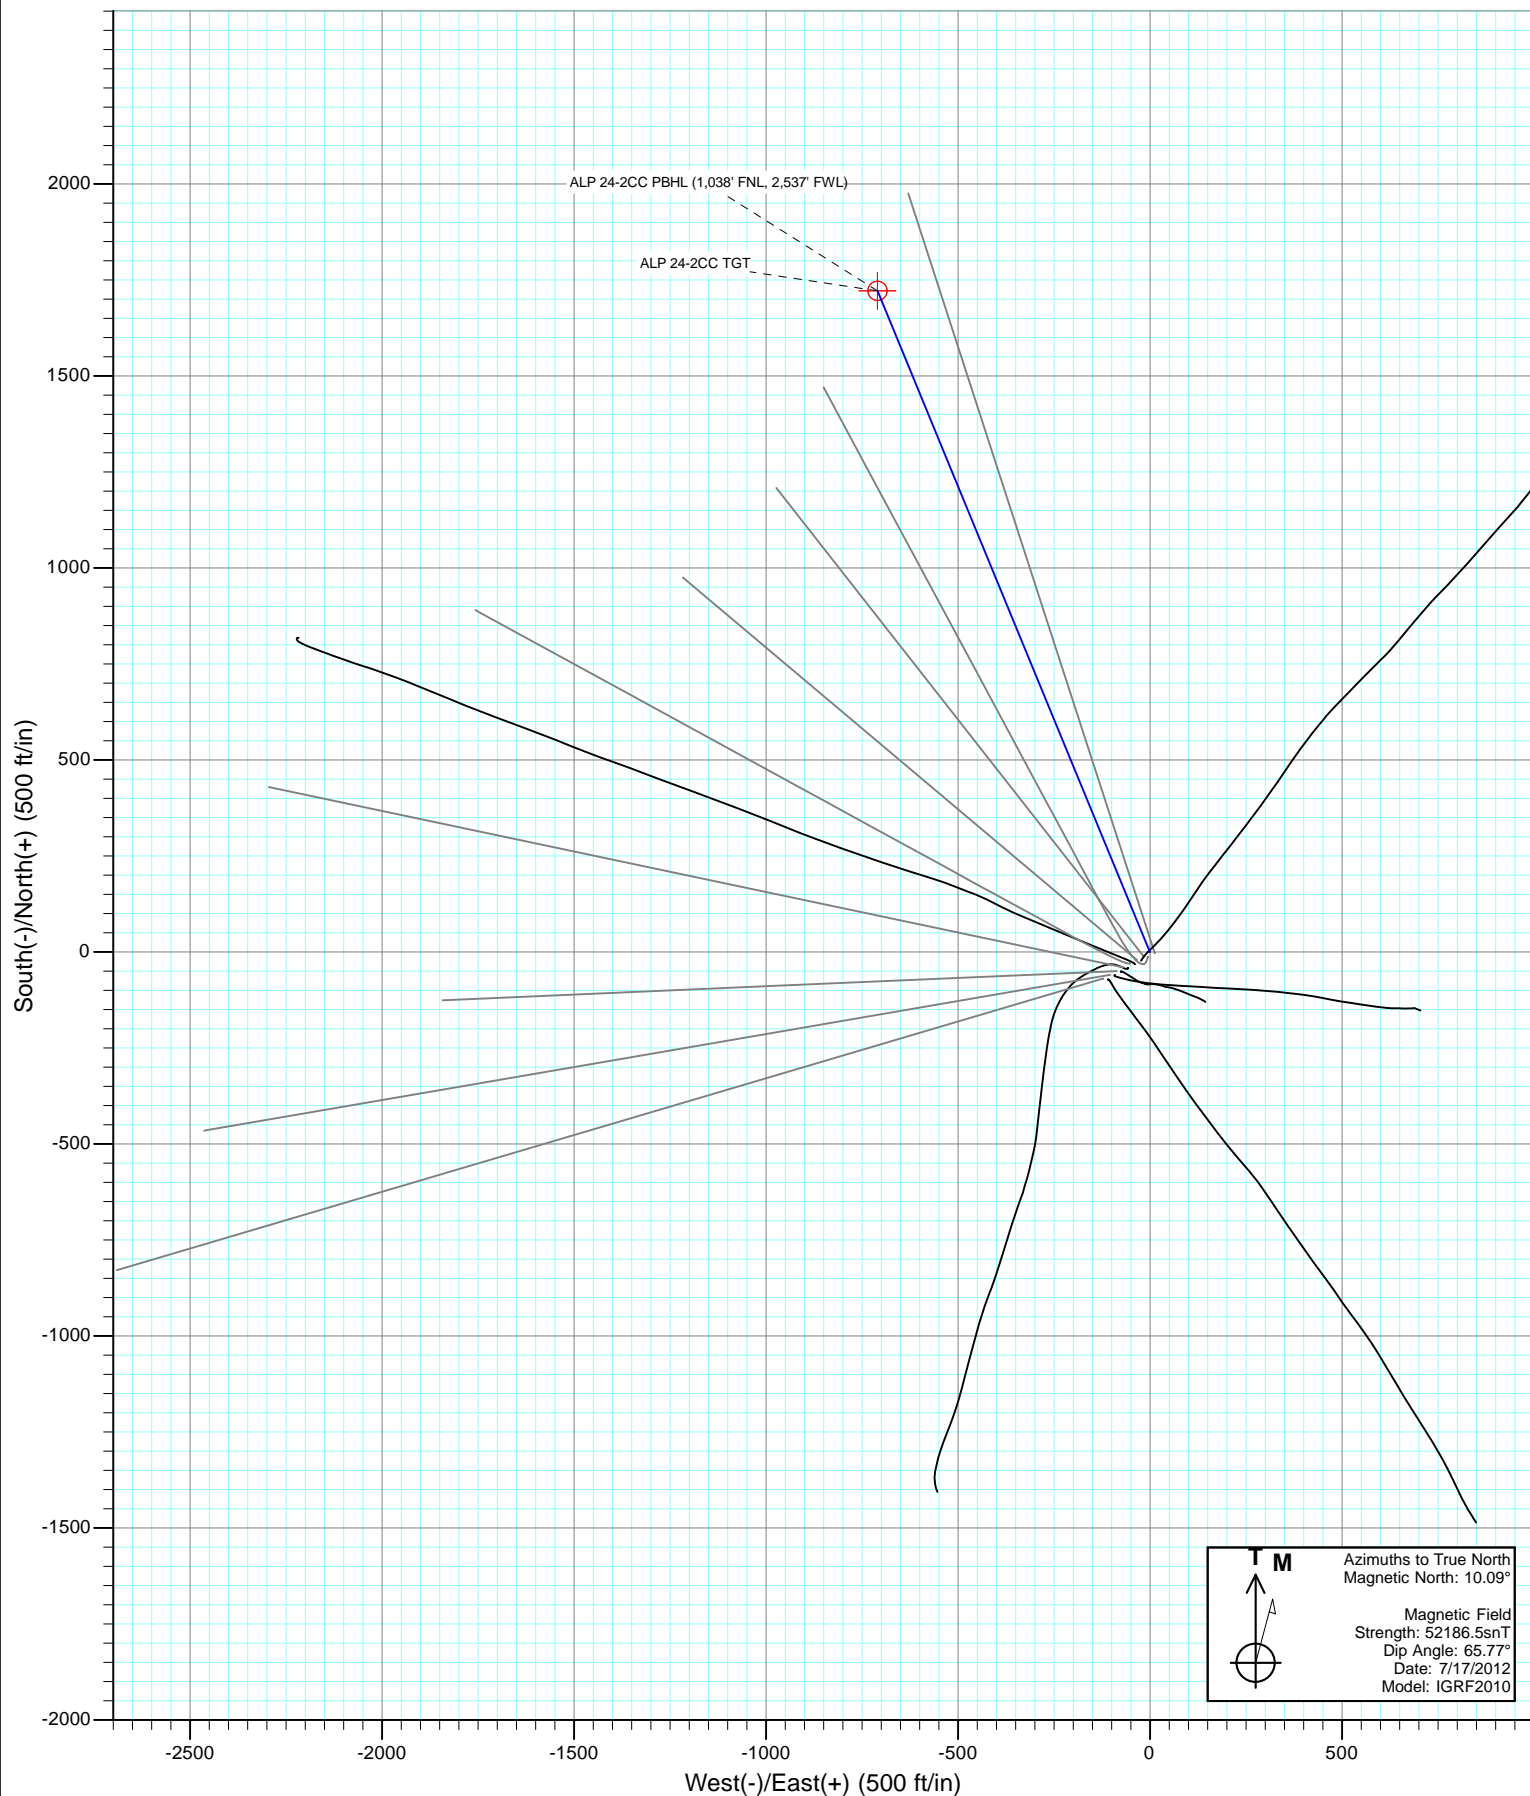

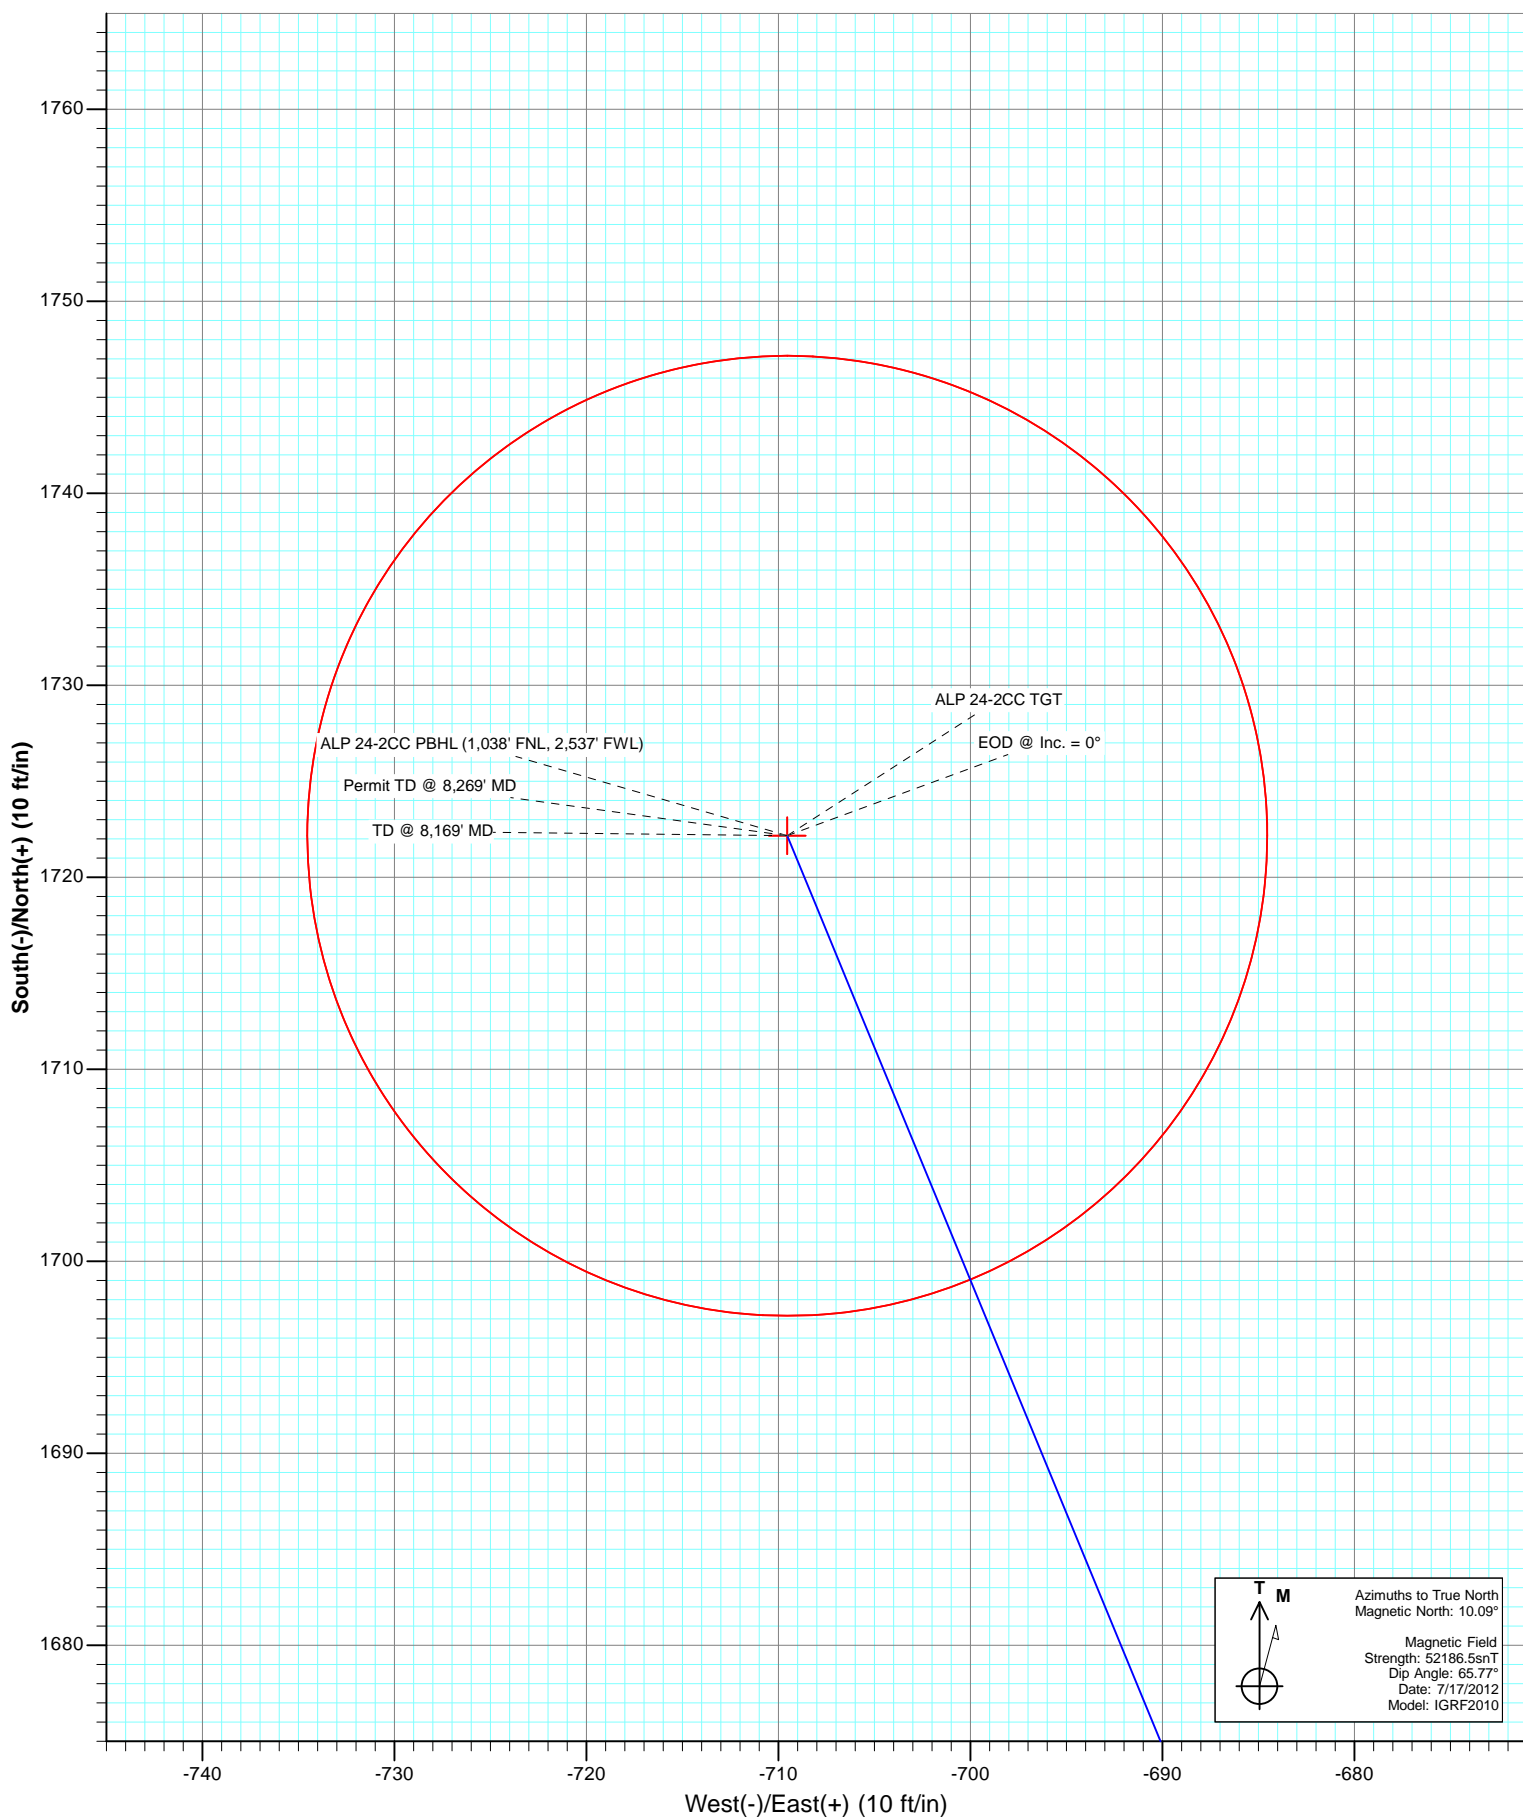

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well ALP 24-2CC
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Site:	J24 Pad	North Reference:	True
Well:	ALP 24-2CC	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Project	Mamm Creek		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Central Zone		

Site		J24 Pad			
Site Position:		Northing:	1,618,899.86 ft	Latitude:	39.511614
From:	Lat/Long	Easting:	2,373,314.58 ft	Longitude:	-107.721441
Position Uncertainty:	0.0 ft	Slot Radius:	13.200 in	Grid Convergence:	-1.40 °

Well	ALP 24-2CC					
Well Position	+N/-S	0.0 ft	Northing:	1,618,902.34 ft	Latitude:	39.511620
	+E/-W	0.0 ft	Easting:	2,373,301.94 ft	Longitude:	-107.721486
Position Uncertainty		0.0 ft	Wellhead Elevation:	ft	Ground Level:	5,680.0 ft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	7/17/2012	10.09	65.77	52,187

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(ft)	(ft)	(ft)	(°)
	0.0	0.0	0.0	337.61

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.00	0.00	0.00	0.00	
920.9	21.63	337.61	903.9	124.3	-51.2	3.00	3.00	0.00	337.61	
5,062.7	21.63	337.61	4,754.2	1,535.7	-632.7	0.00	0.00	0.00	0.00	
6,144.0	0.00	0.00	5,810.0	1,722.2	-709.5	2.00	-2.00	0.00	180.00	ALP 24-2CC TGT
8,169.0	0.00	0.00	7,835.0	1,722.2	-709.5	0.00	0.00	0.00	0.00	ALP 24-2CC PBHL (1
8,269.0	0.00	0.00	7,935.0	1,722.2	-709.5	0.00	0.00	0.00	0.00	

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well ALP 24-2CC
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Site:	J24 Pad	North Reference:	True
Well:	ALP 24-2CC	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Comments / Formations
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	KOP @ 200'
300.0	3.00	337.61	300.0	2.4	-1.0	2.6	3.00	3.00	
400.0	6.00	337.61	399.6	9.7	-4.0	10.5	3.00	3.00	
500.0	9.00	337.61	498.8	21.7	-9.0	23.5	3.00	3.00	
600.0	12.00	337.61	597.1	38.6	-15.9	41.7	3.00	3.00	
700.0	15.00	337.61	694.3	60.2	-24.8	65.1	3.00	3.00	
800.0	18.00	337.61	790.2	86.4	-35.6	93.5	3.00	3.00	
900.0	21.00	337.61	884.4	117.3	-48.3	126.9	3.00	3.00	
920.9	21.63	337.61	903.9	124.3	-51.2	134.4	3.00	3.00	EOB @ Inc. = 21.63°
1,000.0	21.63	337.61	977.4	151.3	-62.3	163.6	0.00	0.00	
1,100.0	21.63	337.61	1,070.4	185.3	-76.4	200.5	0.00	0.00	Surface Casing
1,200.0	21.63	337.61	1,163.4	219.4	-90.4	237.3	0.00	0.00	
1,300.0	21.63	337.61	1,256.3	253.5	-104.4	274.2	0.00	0.00	
1,400.0	21.63	337.61	1,349.3	287.6	-118.5	311.0	0.00	0.00	
1,486.8	21.63	337.61	1,430.0	317.2	-130.7	343.0	0.00	0.00	Molina
1,500.0	21.63	337.61	1,442.2	321.6	-132.5	347.9	0.00	0.00	
1,600.0	21.63	337.61	1,535.2	355.7	-146.6	384.7	0.00	0.00	
1,700.0	21.63	337.61	1,628.2	389.8	-160.6	421.6	0.00	0.00	
1,800.0	21.63	337.61	1,721.1	423.9	-174.6	458.4	0.00	0.00	
1,900.0	21.63	337.61	1,814.1	458.0	-188.7	495.3	0.00	0.00	
2,000.0	21.63	337.61	1,907.0	492.0	-202.7	532.2	0.00	0.00	
2,100.0	21.63	337.61	2,000.0	526.1	-216.8	569.0	0.00	0.00	
2,155.9	21.63	337.61	2,052.0	545.2	-224.6	589.6	0.00	0.00	Atwell Gulch
2,200.0	21.63	337.61	2,093.0	560.2	-230.8	605.9	0.00	0.00	
2,300.0	21.63	337.61	2,185.9	594.3	-244.8	642.7	0.00	0.00	
2,400.0	21.63	337.61	2,278.9	628.3	-258.9	679.6	0.00	0.00	
2,500.0	21.63	337.61	2,371.8	662.4	-272.9	716.4	0.00	0.00	
2,600.0	21.63	337.61	2,464.8	696.5	-287.0	753.3	0.00	0.00	
2,700.0	21.63	337.61	2,557.8	730.6	-301.0	790.1	0.00	0.00	
2,800.0	21.63	337.61	2,650.7	764.6	-315.0	827.0	0.00	0.00	
2,900.0	21.63	337.61	2,743.7	798.7	-329.1	863.9	0.00	0.00	
3,000.0	21.63	337.61	2,836.6	832.8	-343.1	900.7	0.00	0.00	
3,100.0	21.63	337.61	2,929.6	866.9	-357.2	937.6	0.00	0.00	
3,200.0	21.63	337.61	3,022.6	901.0	-371.2	974.4	0.00	0.00	
3,300.0	21.63	337.61	3,115.5	935.0	-385.2	1,011.3	0.00	0.00	
3,400.0	21.63	337.61	3,208.5	969.1	-399.3	1,048.1	0.00	0.00	
3,500.0	21.63	337.61	3,301.5	1,003.2	-413.3	1,085.0	0.00	0.00	
3,600.0	21.63	337.61	3,394.4	1,037.3	-427.3	1,121.8	0.00	0.00	
3,700.0	21.63	337.61	3,487.4	1,071.3	-441.4	1,158.7	0.00	0.00	
3,800.0	21.63	337.61	3,580.3	1,105.4	-455.4	1,195.6	0.00	0.00	
3,900.0	21.63	337.61	3,673.3	1,139.5	-469.5	1,232.4	0.00	0.00	
4,000.0	21.63	337.61	3,766.3	1,173.6	-483.5	1,269.3	0.00	0.00	
4,100.0	21.63	337.61	3,859.2	1,207.6	-497.5	1,306.1	0.00	0.00	
4,200.0	21.63	337.61	3,952.2	1,241.7	-511.6	1,343.0	0.00	0.00	
4,277.3	21.63	337.61	4,024.0	1,268.0	-522.4	1,371.4	0.00	0.00	Mesaverde
4,300.0	21.63	337.61	4,045.1	1,275.8	-525.6	1,379.8	0.00	0.00	
4,400.0	21.63	337.61	4,138.1	1,309.9	-539.7	1,416.7	0.00	0.00	
4,500.0	21.63	337.61	4,231.1	1,343.9	-553.7	1,453.5	0.00	0.00	
4,600.0	21.63	337.61	4,324.0	1,378.0	-567.7	1,490.4	0.00	0.00	
4,700.0	21.63	337.61	4,417.0	1,412.1	-581.8	1,527.3	0.00	0.00	

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well ALP 24-2CC
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Site:	J24 Pad	North Reference:	True
Well:	ALP 24-2CC	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Comments / Formations
4,800.0	21.63	337.61	4,509.9	1,446.2	-595.8	1,564.1	0.00	0.00	
4,900.0	21.63	337.61	4,602.9	1,480.3	-609.9	1,601.0	0.00	0.00	
4,933.5	21.63	337.61	4,634.0	1,491.7	-614.6	1,613.3	0.00	0.00	Williams Fork
5,000.0	21.63	337.61	4,695.9	1,514.3	-623.9	1,637.8	0.00	0.00	
5,062.7	21.63	337.61	4,754.2	1,535.7	-632.7	1,660.9	0.00	0.00	Start 2° Drop
5,100.0	20.88	337.61	4,788.9	1,548.2	-637.9	1,674.4	2.00	-2.00	
5,200.0	18.88	337.61	4,882.9	1,579.6	-650.8	1,708.5	2.00	-2.00	
5,300.0	16.88	337.61	4,978.1	1,608.0	-662.5	1,739.2	2.00	-2.00	
5,400.0	14.88	337.61	5,074.3	1,633.3	-672.9	1,766.5	2.00	-2.00	
5,500.0	12.88	337.61	5,171.4	1,655.5	-682.1	1,790.5	2.00	-2.00	
5,600.0	10.88	337.61	5,269.2	1,674.5	-689.9	1,811.1	2.00	-2.00	
5,700.0	8.88	337.61	5,367.7	1,690.4	-696.4	1,828.3	2.00	-2.00	
5,800.0	6.88	337.61	5,466.8	1,703.1	-701.7	1,842.0	2.00	-2.00	
5,900.0	4.88	337.61	5,566.2	1,712.6	-705.6	1,852.2	2.00	-2.00	
6,000.0	2.88	337.61	5,666.0	1,718.8	-708.2	1,859.0	2.00	-2.00	
6,100.0	0.88	337.61	5,766.0	1,721.8	-709.4	1,862.3	2.00	-2.00	
6,144.0	0.00	0.00	5,810.0	1,722.2	-709.5	1,862.6	2.00	-2.00	EOD @ Inc. = 0° - TOG
6,200.0	0.00	0.00	5,866.0	1,722.2	-709.5	1,862.6	0.00	0.00	
6,300.0	0.00	0.00	5,966.0	1,722.2	-709.5	1,862.6	0.00	0.00	
6,400.0	0.00	0.00	6,066.0	1,722.2	-709.5	1,862.6	0.00	0.00	
6,500.0	0.00	0.00	6,166.0	1,722.2	-709.5	1,862.6	0.00	0.00	
6,600.0	0.00	0.00	6,266.0	1,722.2	-709.5	1,862.6	0.00	0.00	
6,700.0	0.00	0.00	6,366.0	1,722.2	-709.5	1,862.6	0.00	0.00	
6,800.0	0.00	0.00	6,466.0	1,722.2	-709.5	1,862.6	0.00	0.00	
6,900.0	0.00	0.00	6,566.0	1,722.2	-709.5	1,862.6	0.00	0.00	
7,000.0	0.00	0.00	6,666.0	1,722.2	-709.5	1,862.6	0.00	0.00	
7,100.0	0.00	0.00	6,766.0	1,722.2	-709.5	1,862.6	0.00	0.00	
7,200.0	0.00	0.00	6,866.0	1,722.2	-709.5	1,862.6	0.00	0.00	
7,269.0	0.00	0.00	6,935.0	1,722.2	-709.5	1,862.6	0.00	0.00	Coal Ridge
7,300.0	0.00	0.00	6,966.0	1,722.2	-709.5	1,862.6	0.00	0.00	
7,400.0	0.00	0.00	7,066.0	1,722.2	-709.5	1,862.6	0.00	0.00	
7,500.0	0.00	0.00	7,166.0	1,722.2	-709.5	1,862.6	0.00	0.00	
7,600.0	0.00	0.00	7,266.0	1,722.2	-709.5	1,862.6	0.00	0.00	
7,700.0	0.00	0.00	7,366.0	1,722.2	-709.5	1,862.6	0.00	0.00	
7,800.0	0.00	0.00	7,466.0	1,722.2	-709.5	1,862.6	0.00	0.00	
7,900.0	0.00	0.00	7,566.0	1,722.2	-709.5	1,862.6	0.00	0.00	
8,000.0	0.00	0.00	7,666.0	1,722.2	-709.5	1,862.6	0.00	0.00	
8,019.0	0.00	0.00	7,685.0	1,722.2	-709.5	1,862.6	0.00	0.00	Rollins
8,100.0	0.00	0.00	7,766.0	1,722.2	-709.5	1,862.6	0.00	0.00	
8,169.0	0.00	0.00	7,835.0	1,722.2	-709.5	1,862.6	0.00	0.00	TD @ 8,169' MD
8,200.0	0.00	0.00	7,866.0	1,722.2	-709.5	1,862.6	0.00	0.00	
8,269.0	0.00	0.00	7,935.0	1,722.2	-709.5	1,862.6	0.00	0.00	Permit TD @ 8,269' MD

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well ALP 24-2CC
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Site:	J24 Pad	North Reference:	True
Well:	ALP 24-2CC	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(ft)		
ALP 24-2CC PBHL (1,000' radius) - plan hits target center - Circle (radius 25.0)	0.00	0.00	7,835.0	1,722.2	-709.5	1,620,641.34	2,372,634.73	39.516348	-107.724001
ALP 24-2CC TGT - plan hits target center - Point	0.00	0.00	5,810.0	1,722.2	-709.5	1,620,641.34	2,372,634.73	39.516348	-107.724001

Casing Points				
Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (in)	Hole Diameter (in)
1,100.0	1,070.4	Suface Casing		

Formations						
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,486.8	1,430.0	Molina				
2,155.9	2,052.0	Atwell Gulch				
4,277.3	4,024.0	Mesaverde				
4,933.5	4,634.0	Williams Fork				
6,144.0	5,810.0	TOG				
7,269.0	6,935.0	Coal Ridge				
8,019.0	7,685.0	Rollins				

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
200.0	200.0	0.0	0.0	KOP @ 200'
920.9	903.9	124.3	-51.2	EOB @ Inc. = 21.63°
5,062.7	4,754.2	1,535.7	-632.7	Start 2° Drop
6,144.0	5,810.0	1,722.2	-709.5	EOD @ Inc. = 0°
8,169.0	7,835.0	1,722.2	-709.5	TD @ 8,169' MD
8,269.0	7,935.0	1,722.2	-709.5	Permit TD @ 8,269' MD