

Blac Frac Tanks, Inc.
808 County Road 215
Parachute, CO 81635

Plugging Report for the Kelly 23-2

Oct 15, 2012

Plug #1

Tbg landed at 2012' Pumped 10 bbls to load well, Mixed and pumped 15 sks Type 2 cement (3 bbls cement slurry), Displaced with 6 bbls water. Shut down pressure 400 psi, bled off to 0 psi in less than 5 minutes.

Plug #2

Tbg landed at 850' Mixed and pumped 15 sks Type 2 cement (3 bbls cement slurry) Displaced with 2.5 bbls water.

Plug #3

RIH Set Retainer at 395. Perfs at 405' Mixed and pumped 12 sks Type 2 cement (2.4 bbls cement slurry) Displaced with .6 bbls water. Well on a vacuum. Sting out of retainer. POOH with tbg

Oct 16, 2012


Plug #4

RIH, tagged at 365' Mixed and pumped 6 sks Type 2 cement (1.1 bbls cement slurry) thru customer tbg landed at 360'. Displaced with 1 bbl water.

Plug #5

Land tbg at 60' Mixed and pumped 10 sks Type 2 cement (2 bbls cement slurry) Pumped 1 thru tbg landed at 60' and pumped remaining cement down 1" tbg landed at 50' in 4-1/2" annulus Displaced with 1/2 bbl water.

Used 2 sks in top of well.

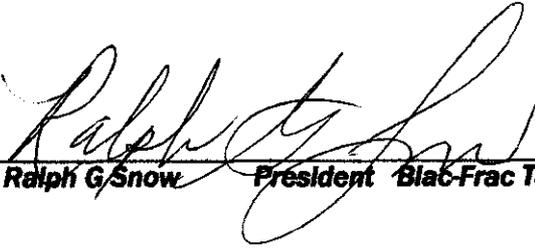

Ralph G. Snow President Blac-Frac Tanks, Inc

11-5-2012