



State
of
Colorado



Krabacher, Jay (Jay.Krabacher@state.co.us)



CBL Deferment Request MCU 26-5A

2 messages

Reynolds, Scott D. <Scott.Reynolds@encana.com>
To: "Krabacher, Jay (Jay.Krabacher@state.co.us)" <Jay.Krabacher@state.co.us>
Cc: "King, Kevin" <Kevin.King@state.co.us>

Mon, Nov 26, 2012 at 8:54 AM

Jay,

This is a bit overdue because of the Thanksgiving holiday. If anything had been amiss with the cement job and temp log I would have notified the BLM and COGCC immediately.


Encana CBL Deferment Request (Production Casing)

Well Name:	MCU 26-5A
API Number:	05-045-21603-00
Pad Name:	I27W
Casing Size	4-1/2" 11.6# S80 BTC
Casing Setting Depth	9,523 MD-RKB
Plug Bump Date:	11-21-2012
Plug Bump Time:	07:30 hrs
Top of MV:	5884' MD-RKB
Top of Gas:	7505' MD-RKB
Designed TOC:	5184' MD-RKB
Temp Log TOC:	5640' MD-RKB

Bradenhead Pressure Report


Time	Bradenhead Pressure
6 hours	0


12 hours	0
24 hours	0
48 hours	0
72 hours	0



Comments:

Cemented prod. CSG in place with 40bbls of 11.0ppg mud push, 160bbls of (502sx) of 12.0ppg lead, 109bbls (427sx) of 13.0ppg TXI tail, dropped wiper plug and displaced 147bbls of water bumped plug 800psi over @ 07:30 floats held.

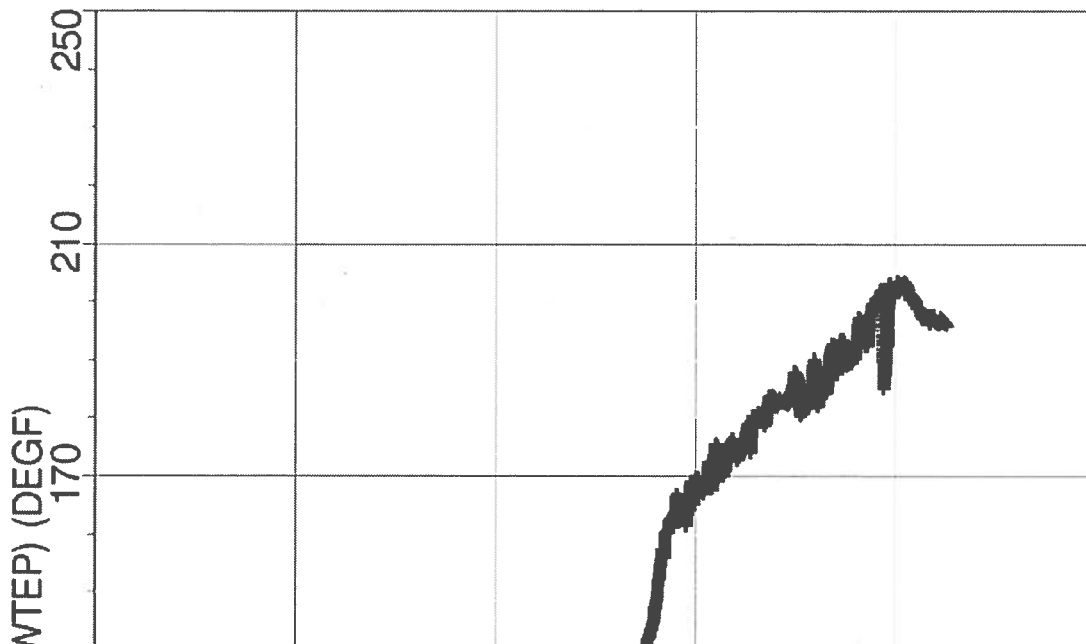

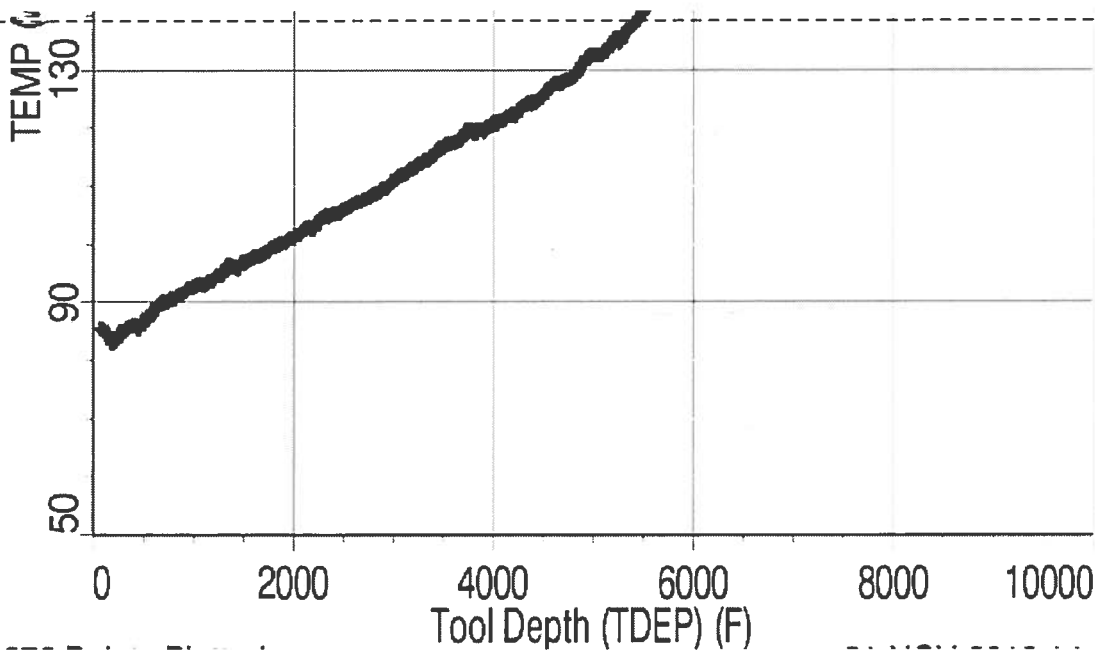

RECEIVED

NOV 26 2012

COGCC/Rifle Office

Scott Reynolds

Drilling Engineer – South Piceance

Encana Oil & Gas (USA) Inc

O: 720.876.5255

C: 303.895.0445

F: 720.876.6255

scott.reynolds@encana.com

Take a closer look: www.encana.com

Please note: Encana offices are closed the first and third Friday of each month

This email communication and any files transmitted with it may contain confidential and or proprietary information and is provided for the use of the intended recipient only. Any review, retransmission or dissemination of this information by anyone other than the intended recipient is prohibited. If you receive this email in error, please contact the sender and delete this communication and any copies immediately. Thank you.

<http://www.encana.com>

 **AOJL-00096_ENCANA_MCU 26-5A_(I27W)_TEMP_LOG_Combined.pdf**
6443K

Krabacher, Jay <jay.krabacher@state.co.us>
Draft To: "Reynolds, Scott D." <Scott.Reynolds@encana.com>
Cc: "King, Kevin" <Kevin.King@state.co.us>

Mon, Nov 26, 2012 at 10:56 AM

Greetings, Scott:

Encana can (continue to) defer the CBL on this well.

[Quoted text hidden]