

Well

Operator
Location
County
State
Field
Footages

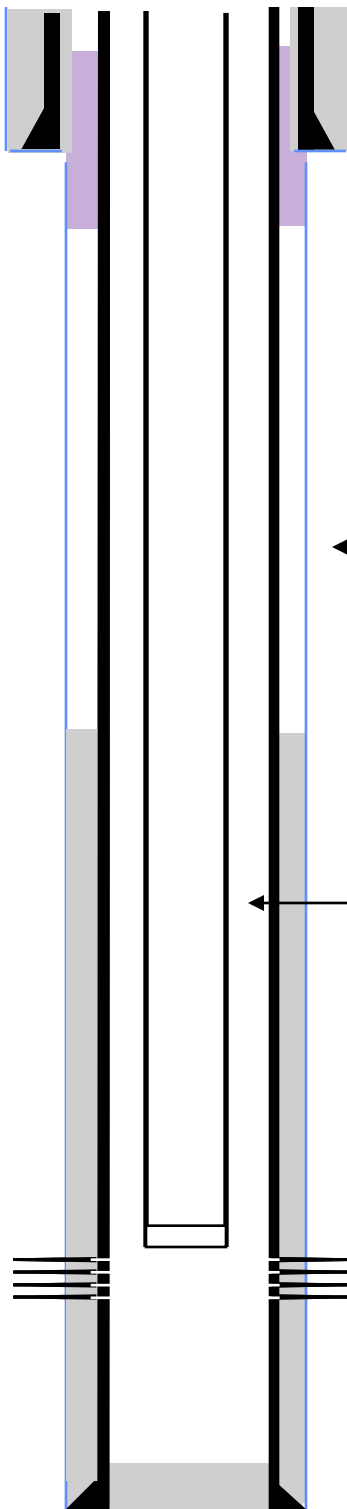
Starks #1

North American Resources Co.
SWSW Section 30-T2N-R64W
Weld
Colorado
Wattenberg
1290' fsl, 1015' fwl

Spud: 5/25/1979
TD:
Rig Release:

Log Tops

Base Fox Hills – 891'
Sussex – 4530'
Niobrara – 6856'
J Sand – 7610'

**Surface Hole**

12 1/4"

Surface Casing Cement

8 5/8" casing set at 213'.
Cemented with 225 sxs.
Cement circulated to surface

Production Casing

4 1/2" casing set at 7763'
Cemented with 225 sxs.

***1000 Angel at 738'**

Main Hole

7-7/8" to TD

TOC 6830'

Production Tubing

2-3/8"

J-Sand Perf

7618-52'
Frac'd with 309,200 #

7763' — TD