
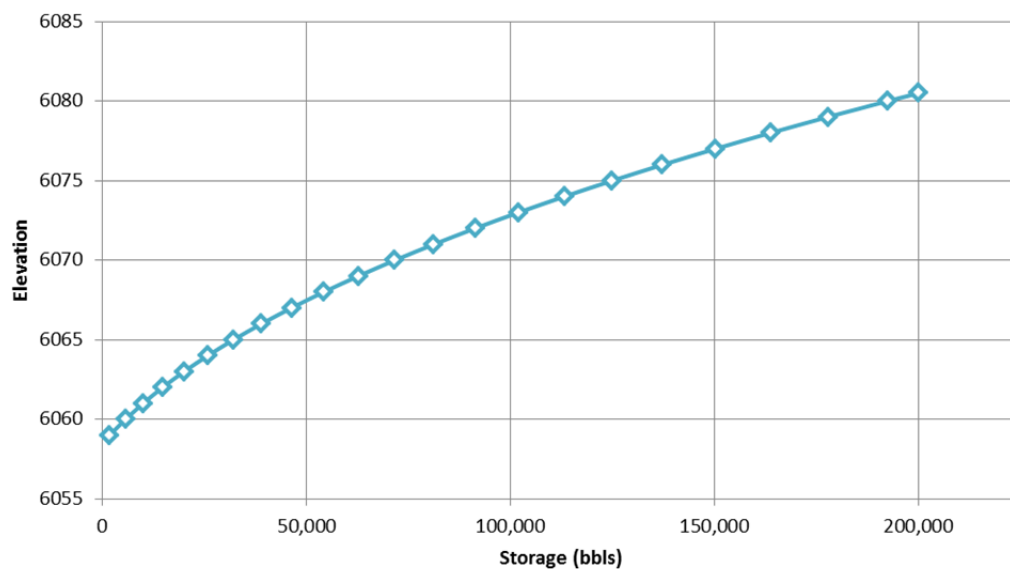


# HTMWF Upper Pond Storage Capacity

## Dimensions

- Length: 750 ft
- Width: 120 ft
- Depth: 21.5 ft
- Internal side slopes: 2:1

## Stage Storage Curves

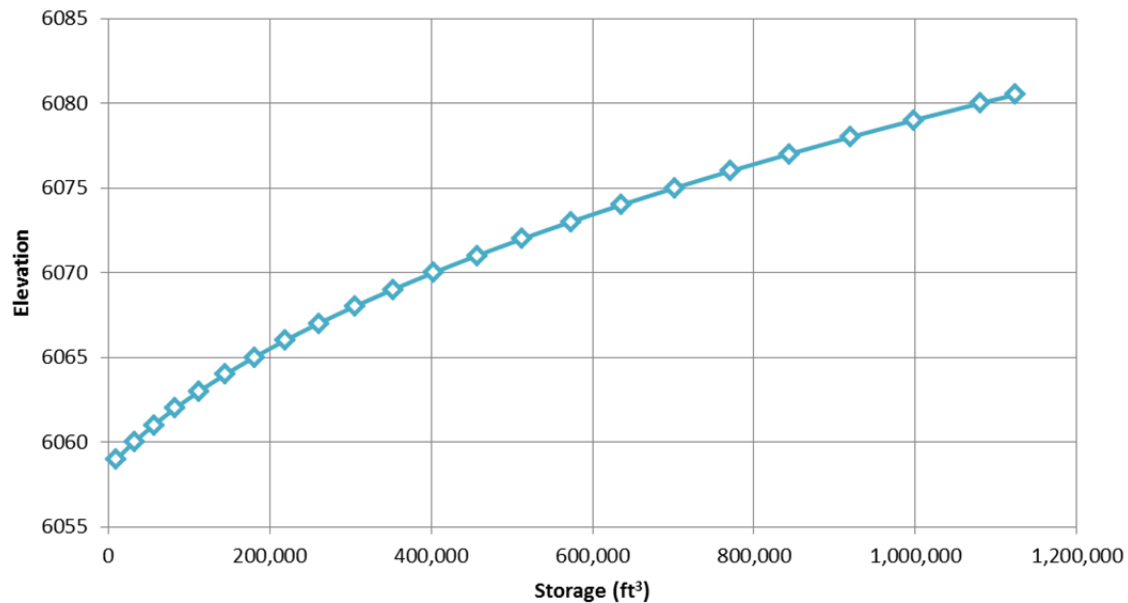

## Stage Storage Data

Elevation (ft)	Area (ft <sup>2</sup> )	Depth (ft)	Incremental Vol. (bbls)	Accumulated Vol. (bbls)	Accumulated Vol. (ft <sup>3</sup> )
6059	8,643	1.2	1,847	1,847	10,371
6060	21,843	1.0	3,890	5,737	32,212
6061	24,322	1.0	4,332	10,069	56,532
6062	26,800	1.0	4,773	14,842	83,331
6063	29,672	1.0	5,284	20,126	113,001
6064	32,544	1.0	5,796	25,922	145,542
6065	35,480	1.0	6,319	32,241	181,020
6066	38,416	1.0	6,842	39,083	219,433
6067	41,401	1.0	7,373	46,456	260,831
6068	44,385	1.0	7,905	54,361	305,213
6069	47,422	1.0	8,446	62,806	352,632
6070	50,458	1.0	8,986	71,793	403,086
6071	53,545	1.0	9,536	81,329	456,628
6072	56,632	1.0	10,086	91,415	513,256
6073	59,769	1.0	10,645	102,059	573,021
6074	62,906	1.0	11,203	113,262	635,923
6075	66,093	1.0	11,771	125,033	702,011
6076	69,280	1.0	12,338	137,372	771,287
6077	72,518	1.0	12,915	150,287	843,800
6078	75,756	1.0	13,492	163,779	919,551
6079	79,044	1.0	14,077	177,856	998,589
6080	82,331	1.0	14,663	192,519	1,080,914
6080.5	85,618	0.5	7,624	200,143	1,123,720