

PDC Energy  
 Anderson #1  
 SESE 6 - 6N - 65W  
 Weld County, CO  
 Current Wellbore - NOT TO SCALE!!!  
 11/15/2013  
 API#: 05-123-11545


GL Elevation: 4783'

Surface Casing:
8 5/8" 24# @ 312' W/ 250 sks cmt.

First String
4 1/2" 11.6# @ 7261' w/ 216 sks cmt

Second String
0

Perforations	
Old:	Codell: 7156'-7166'
	Squeeze holes: 360'
	0
New:	0
	0
	0
	0

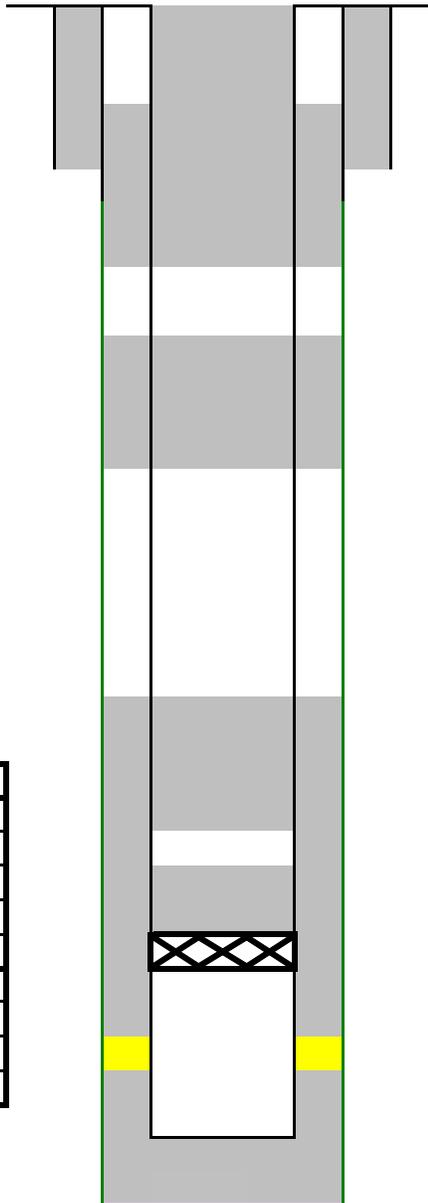

Parkman

Top of Cement:
0

--

CIBP @ 6650'
--------------

Codell
--------

PBTD:	7261'
Casing TD:	0

NOTES

Dump cmt on top of existing CIBP, fill up additional 500' of annular space with cement, cement from 3700'-4700' inside and outside casing to cover Parkman/Sussex, set surface plug from 600' to surface