

Compton #2

Current

Red Mesa Field

2436' FNL and 1509' FEL, Section 21, T-33-N, R-12-W, La Plata County, CO

Lat: N 37.090177 / Long: W -108.151606 / API #05-067- 06242

Today's Date: **9/4/13**

Spud: 4/16/79

Completed: 8/20/79

Elevation: 6,572' GI

Mesaverde @ 240'

Cliffhouse @ 570'


Point Lookout @ 1245'

Gallup @ 1823'

Dakota @ 3317'

11" hole

6.25" hole

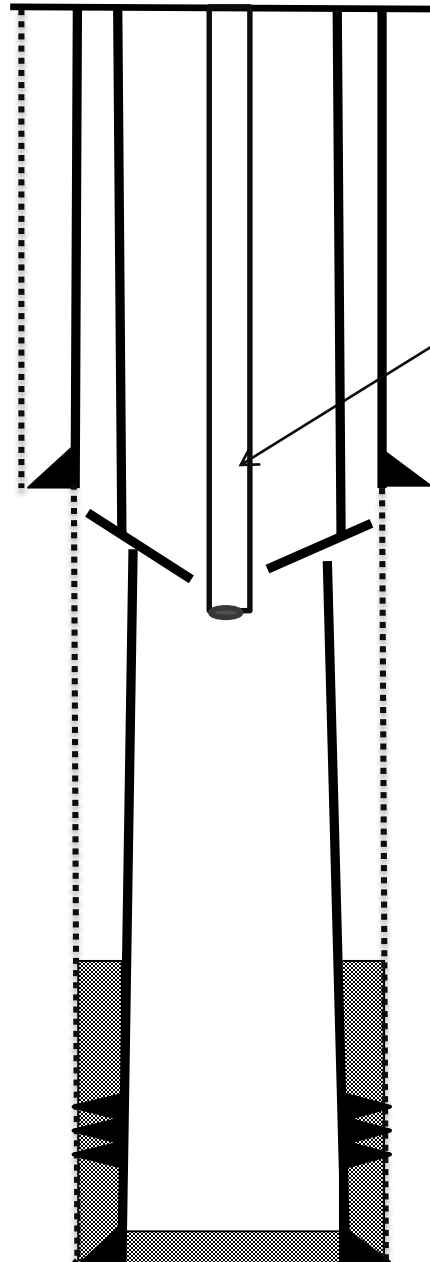

37 jts 2-3/8" tubing with SN @ 1203' w/
rods and pump. (Run 2008)

7" 20# Casing set @ 1170'
No cement of record

Per Company Man, casing is
collapsed at 1182' but can get
tubing through it.

TOC @ 2910' (Calc, 75%)

Dakota Perforations:
3308' – 3390'

4.5" 10.5# Casing set @ 3429'
Cmt with 60 sxs (71 cf)

TD 3429'