

PDC Energy
 Cuykendall 1-31
 NENE 31 3N 63W
 Weld County, CO
 Current Wellbore - NOT TO SCALE!!!
 2/18/2014


API#: 05-123-115720

GL Elevation: 4817'

Surface Casing:
8 5/8" 24# @ 356' W/ 260sks cmt.

First String
4 1/2" 11.6# @ 7431' w/ 300 sks cmt

Second String
0

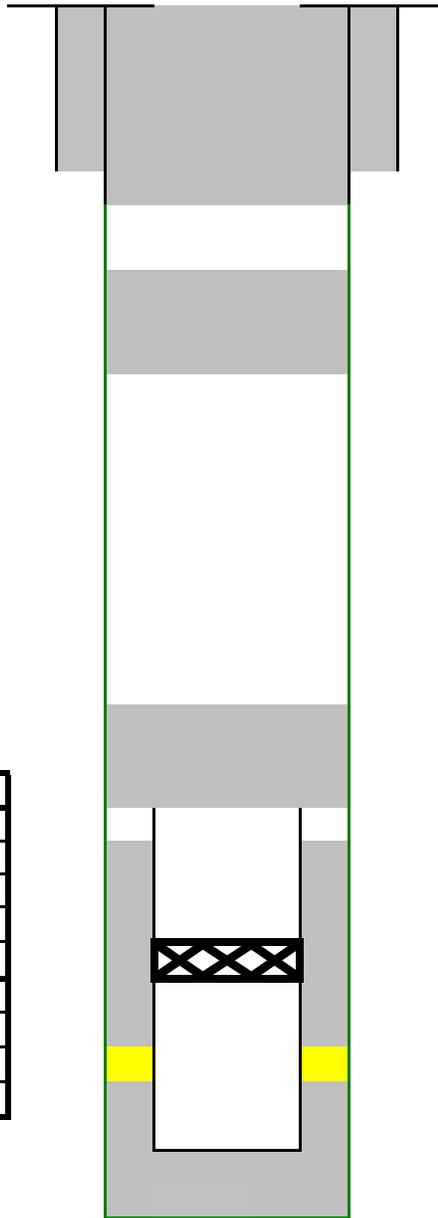

Parkman/Sussex 3500'-4500'

Perforations	
	J Sand: 7276' -7324'
Old:	0
	0
	0
	0
New:	0
	0
	0
	0

Top of Cement:
6330'

CIBP @ 7225'

J Sand

PBTD:	7410'
Casing TD:	0

NOTES

Set CIBP @ 7225' dump 2sx cement on top, cut casing @ 6230' and 50 sx stub plug @6230'. Set 250 sx cement to cover Parkman/Sussex @ 3500' - 4500'. Set 250 sx cement to cover 500'to surface and dump 10 sx at surface