

MD 3370 TVD 3369.63
INC 0.47 AZ 116.39
VS -7.47

RO (Ft/Hr)
Gamma (API)

1500
350

MD 3465 TVD 3464.63
INC 0.94 AZ 83.05
VS -6.35

MD 3559 TVD 3558.62
INC 0.26 AZ 98.4
VS -5.37

3400

3450

3500


3550



Pierre (3400' MD - 3500' MD)



Parkman (3500' MD - 3600' MD)



3300'- 3400': SLTST: 60% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SH, FREE
SLTY SH, SANDY, IMBD PYR, IMBD
GLAUC, IMBD SS LAMN, INTGR
POR, NO STN, NO FLOR, NO O
FLOR, NO CUT, NO RNG

3400'- 3500': SLTST: 50% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SH, FREE
SLTY SH, SANDY, IMBD PYR, IMBD
SS LAMN, INTGR POR, NO STN, NO
FLOR, NO O FLOR, NO CUT, NO
RNG

PARKMAN
3562' MD 3562' TVD

3500'- 3600': SS: 65%: PRED GY -
LTKGY - OPQ, POOR CONS, FN TO
MED GRN, SUBANG, W TO MODY
SRTD, CALC CMT, FREE SLTY SH,
FREE SH, IMBD PYR, TRC IMDB


30


TG, C1-C4

270

CG 63u

CG 183u

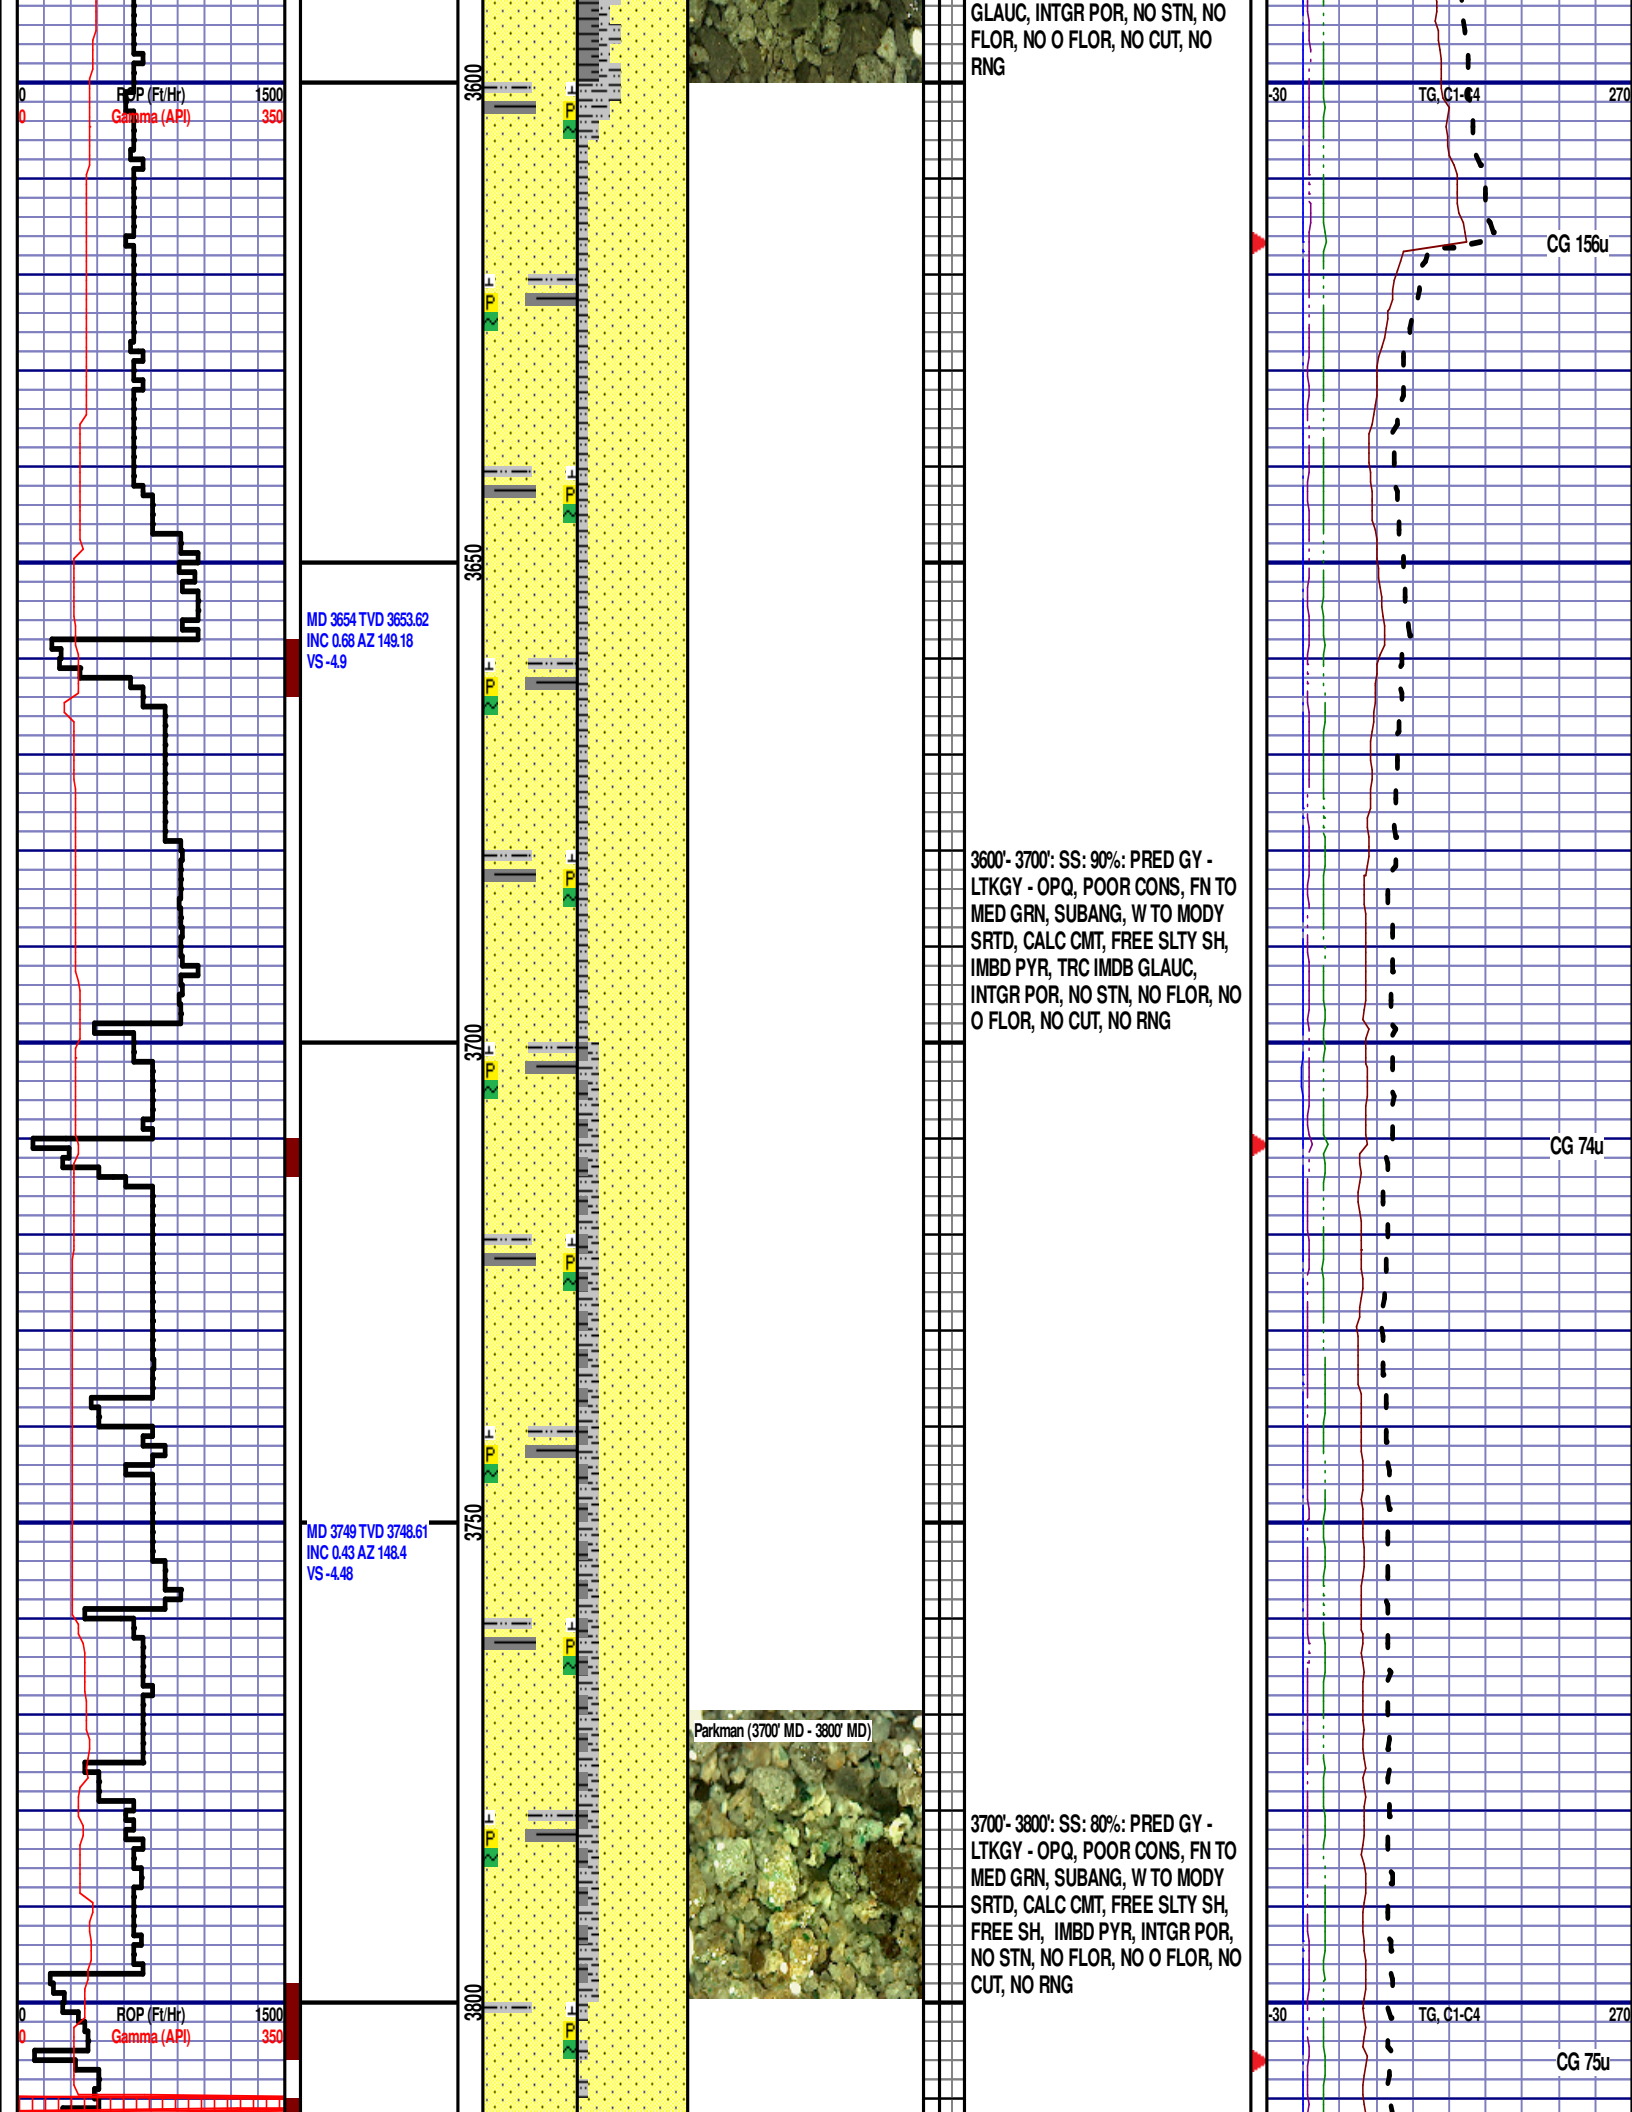

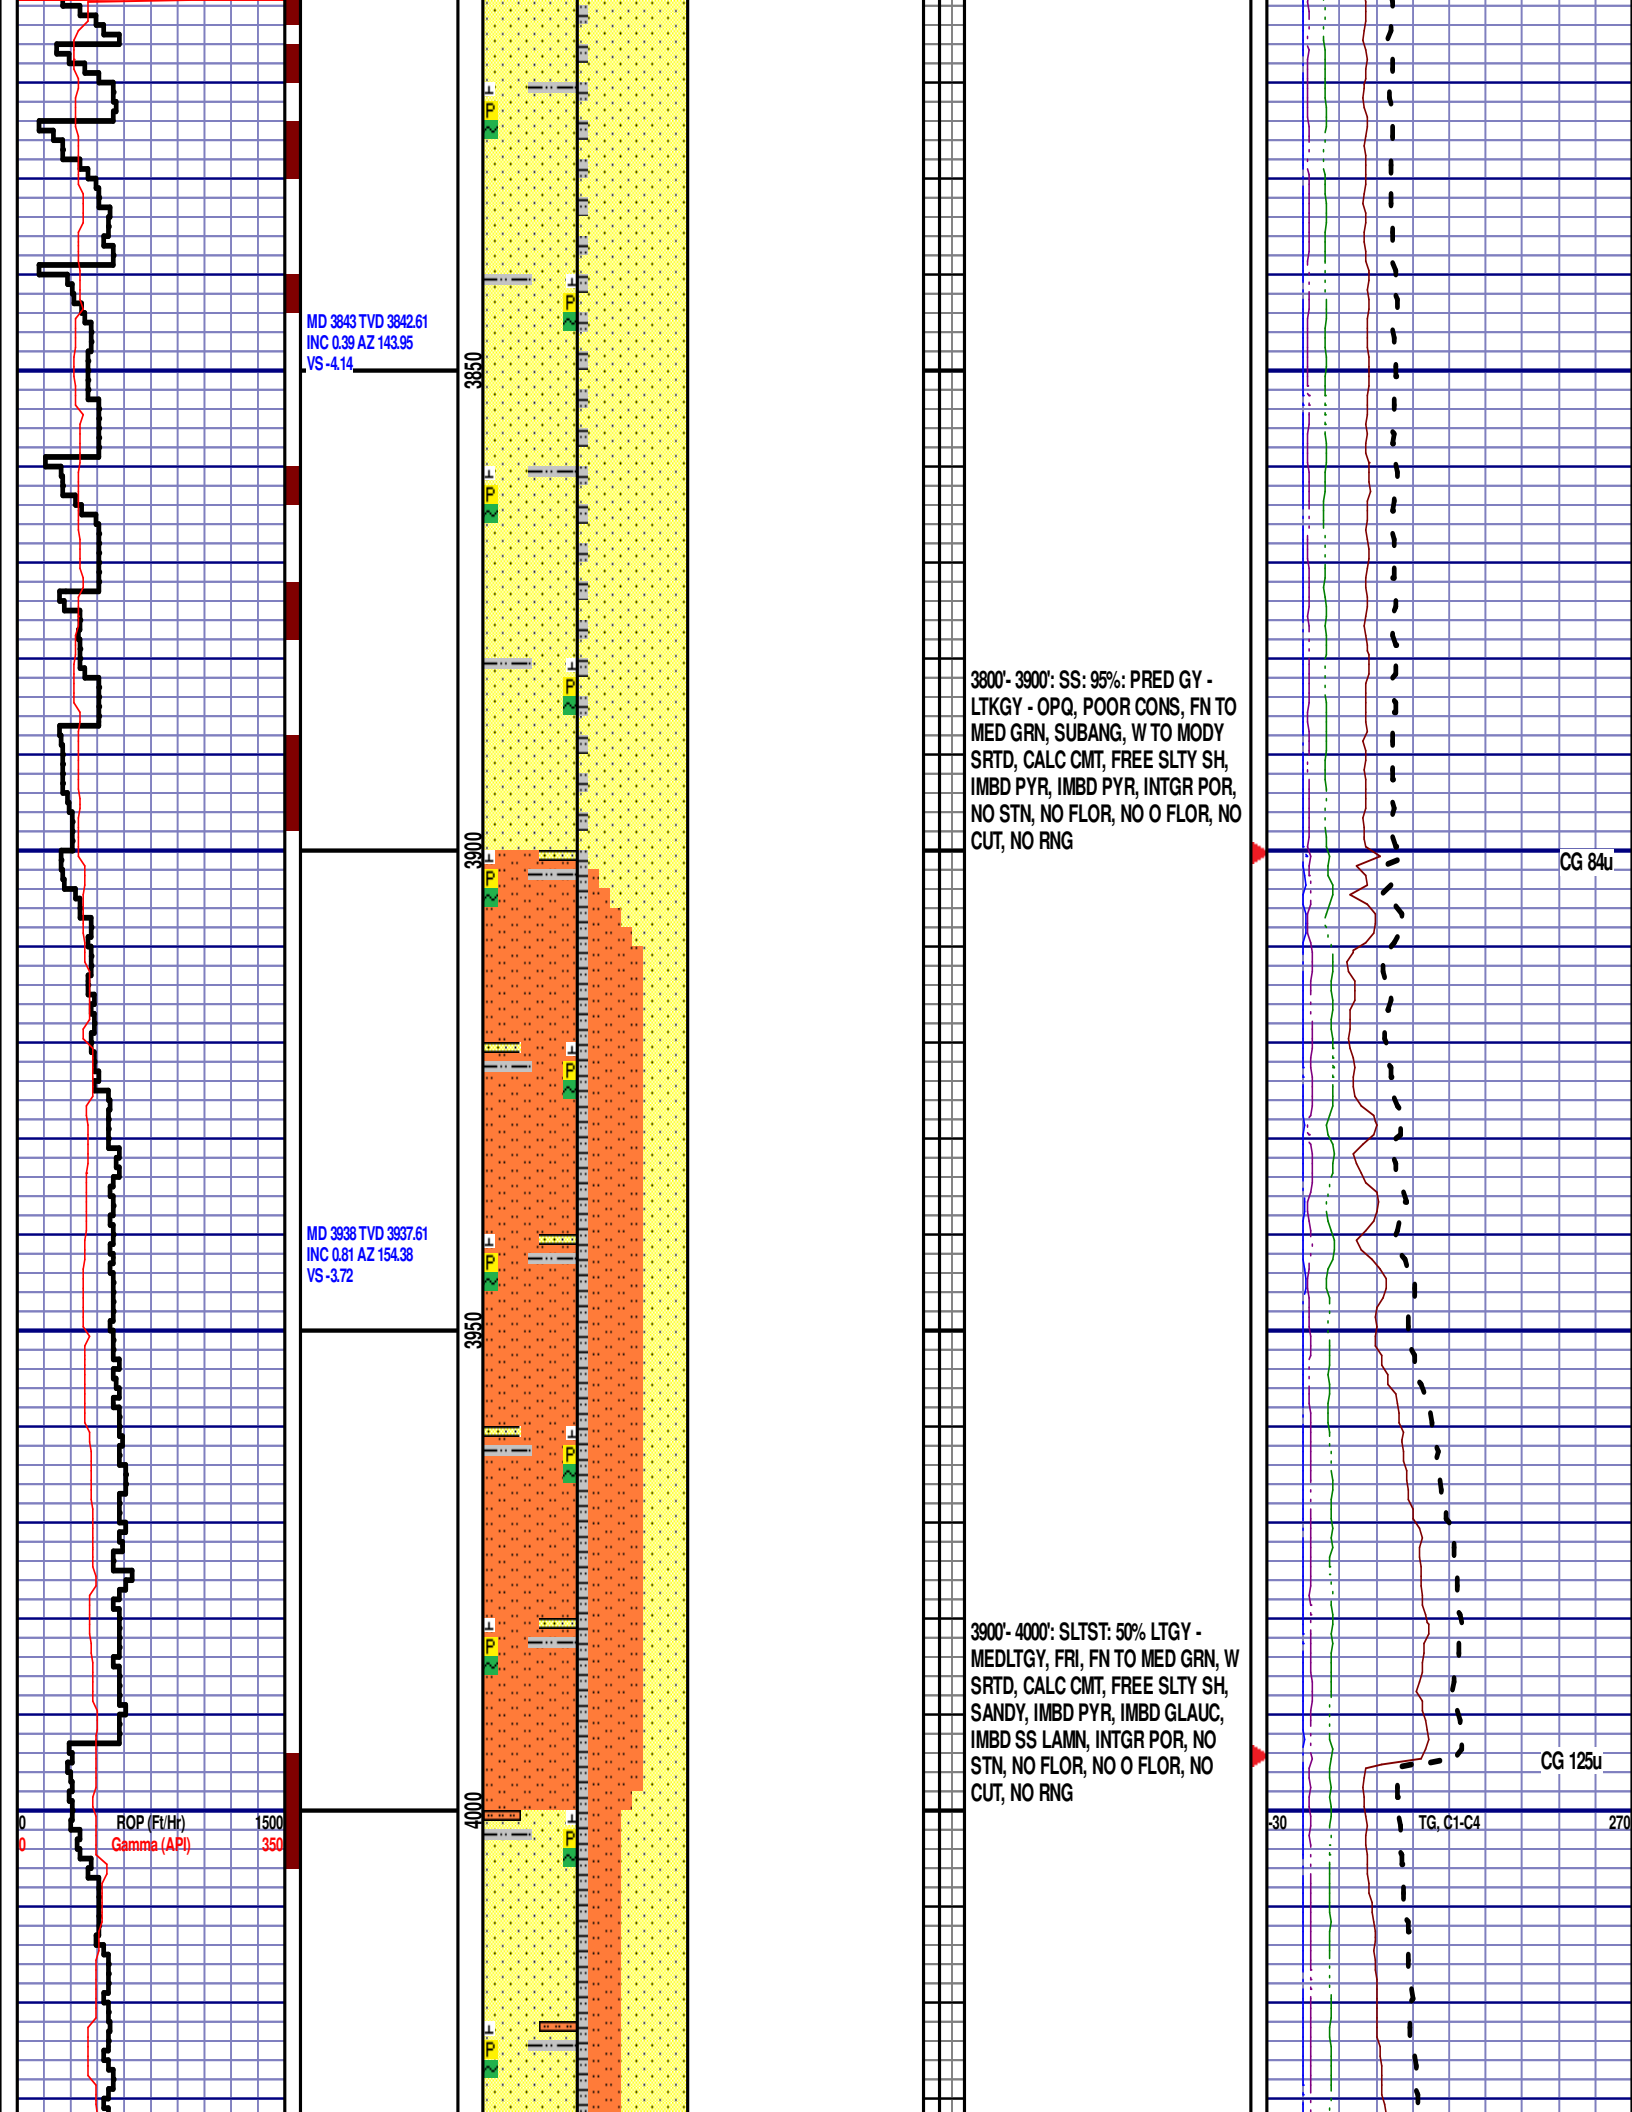

MD 4033 TVD 4032.6
INC 0.68 AZ 160.63
VS -3.31

4050

4100

4150

4200

4250

MD 4128 TVD 4127.59
INC 0.84 AZ 151.61
VS -2.87

MD 4223 TVD 4222.58
INC 0.99 AZ 148.3
VS -2.19




4000'- 4100': SS: 60%: PRED GY -
LTKGY - OPQ, POOR CONS, FN TO
MED GRN, SUBANG, W TO MODY
SRTD, CALC CMT, FREE SLTY SH,
SILTY, IMBD PYR, TRC IMDB
GLAUC, INTGR POR, NO STN, NO
FLOR, NO O FLOR, NO CUT, NO
RNG

4100'- 4200': SLTST: 80% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SLTY SH,
SANDY, IMBD PYR, IMBD GLAUC,
IMBD SS LAMN, INTGR POR, NO
STN, NO FLOR, NO O FLOR, NO
CUT, NO RNG

CG 198u

CG 132u

TG, C1-C4


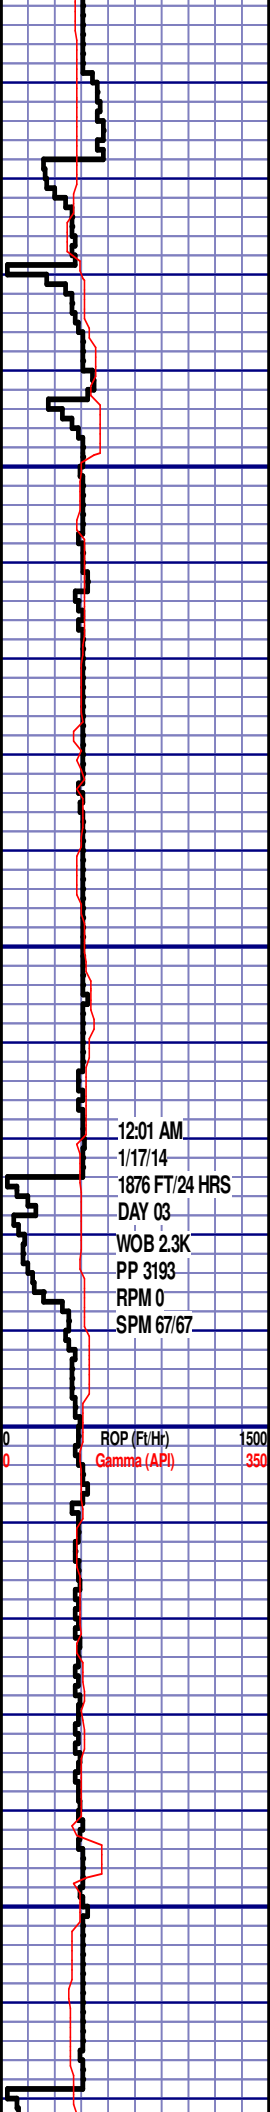


MD 4318 TVD 4317.55
INC 1.51 AZ 143.74
VS -1.13

12:01 AM
1/17/14
1876 FT/24 HRS
DAY 03
WOB 2.3K
PP 3193
RPM 0
SPM 67/67

ROP (Ft/Hr) 1500
Gamma (API) 350


MD 4413 TVD 4412.53
INC 0.89 AZ 166.22
VS -0.32

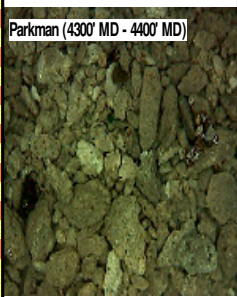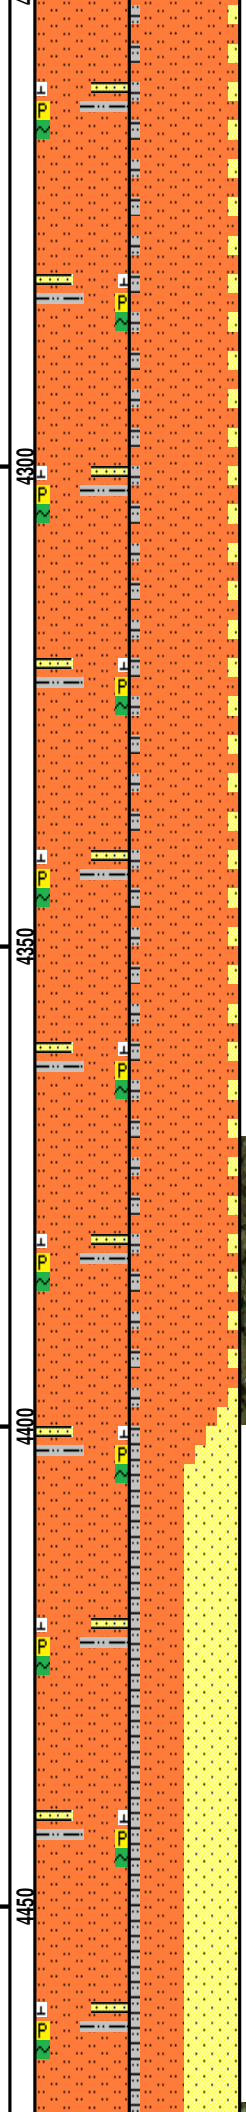

4200'- 4300': SLTST: 90% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SLTY SH,
SANDY, IMBD PYR, IMBD GLAUC,
IMBD SS LAMN, INTGR POR, NO
STN, NO FLOR, NO O FLOR, NO
CUT, NO RNG

4300'- 4400': SLTST: 90% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SLTY SH,
SANDY, IMBD PYR, IMBD GLAUC,
IMBD SS LAMN, INTGR POR, NO
STN, NO FLOR, NO O FLOR, NO
CUT, NO RNG

SUSSEX
4441' MD 4441' TVD

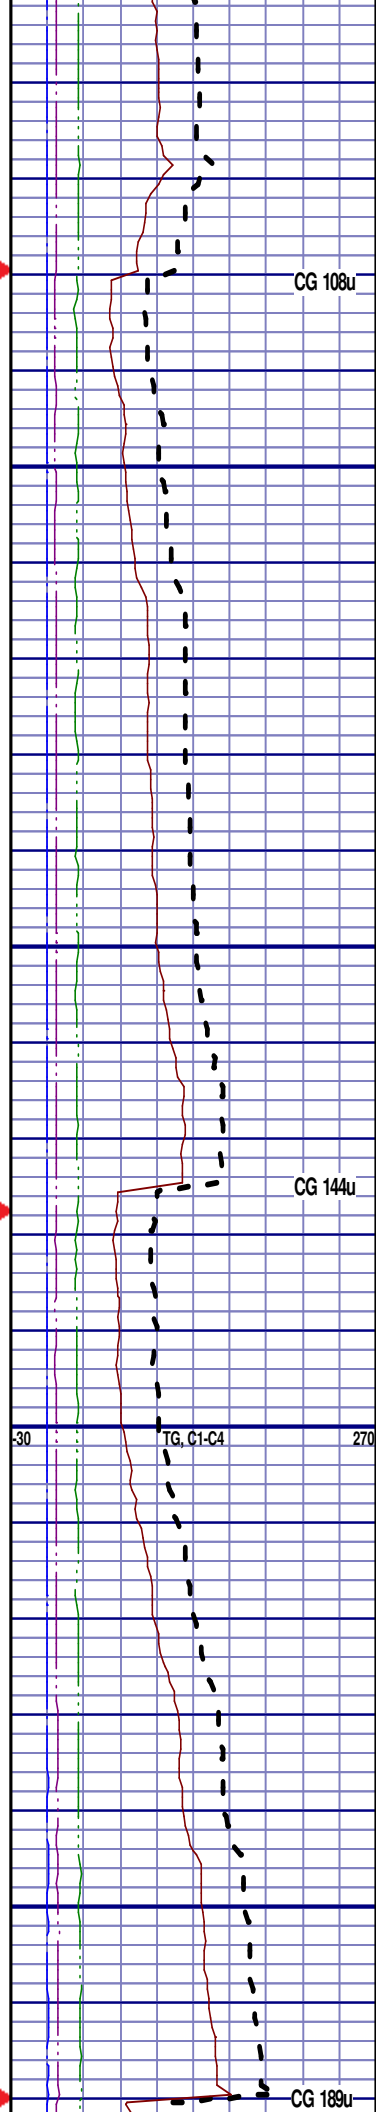



CG 108u


CG 144u

30 TG, C1-C4 270

CG 189u

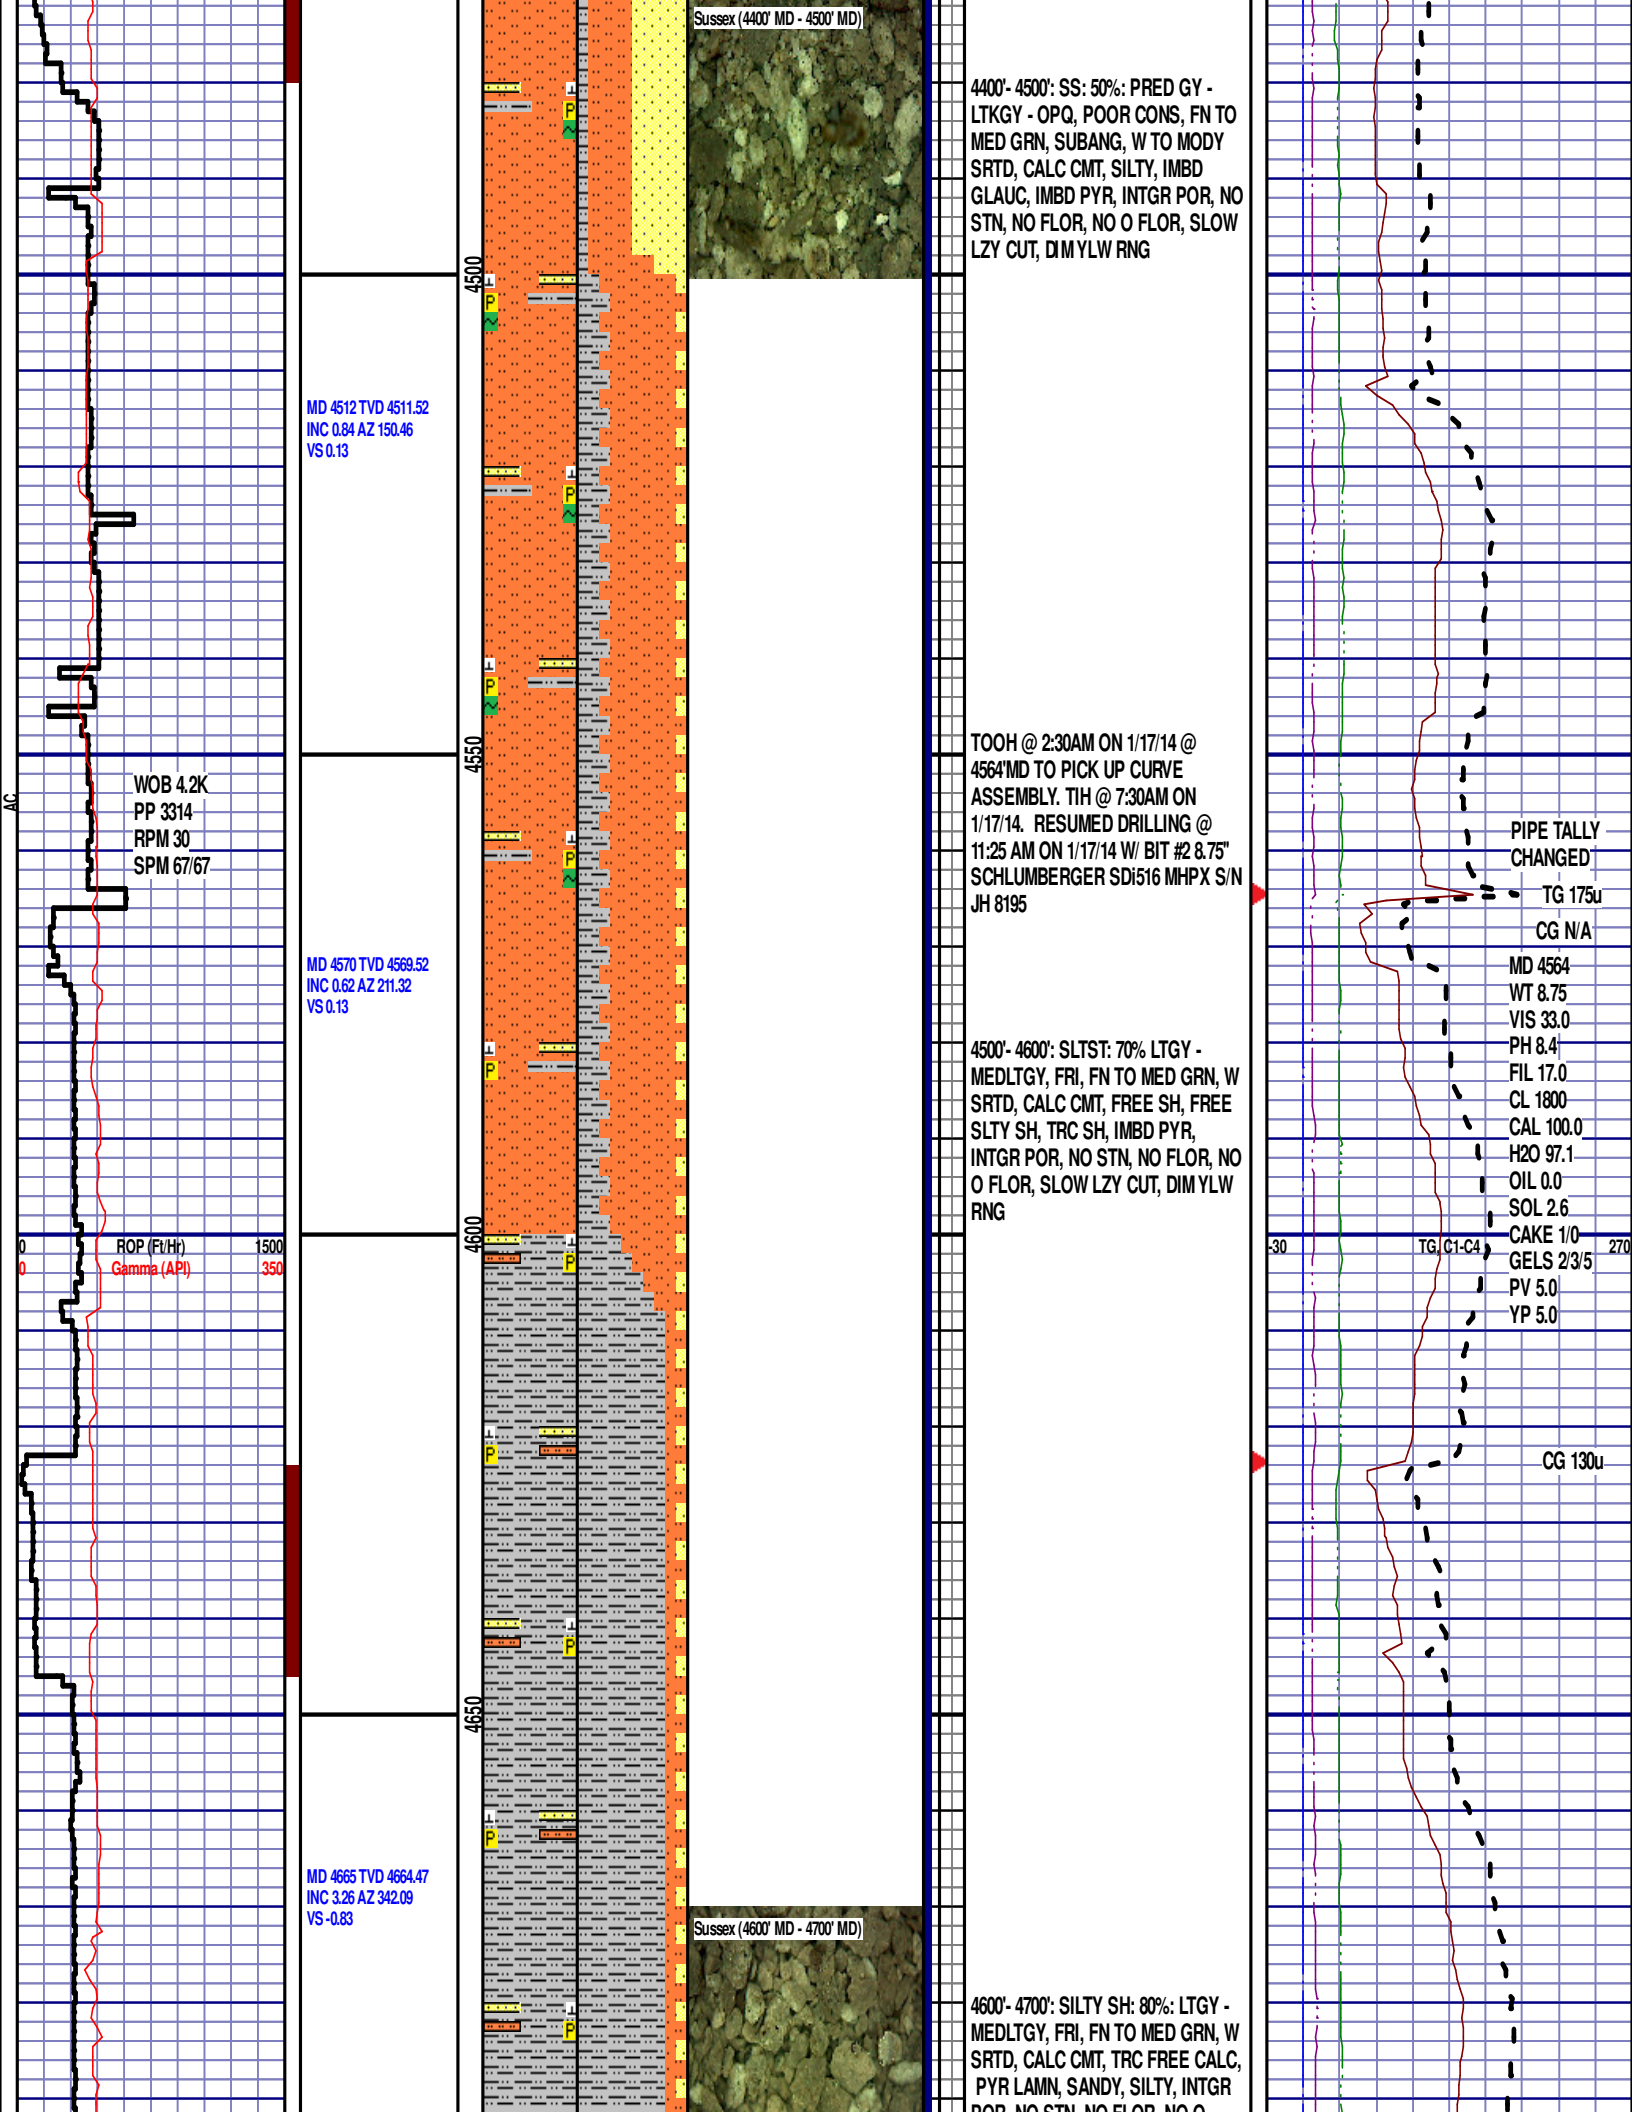

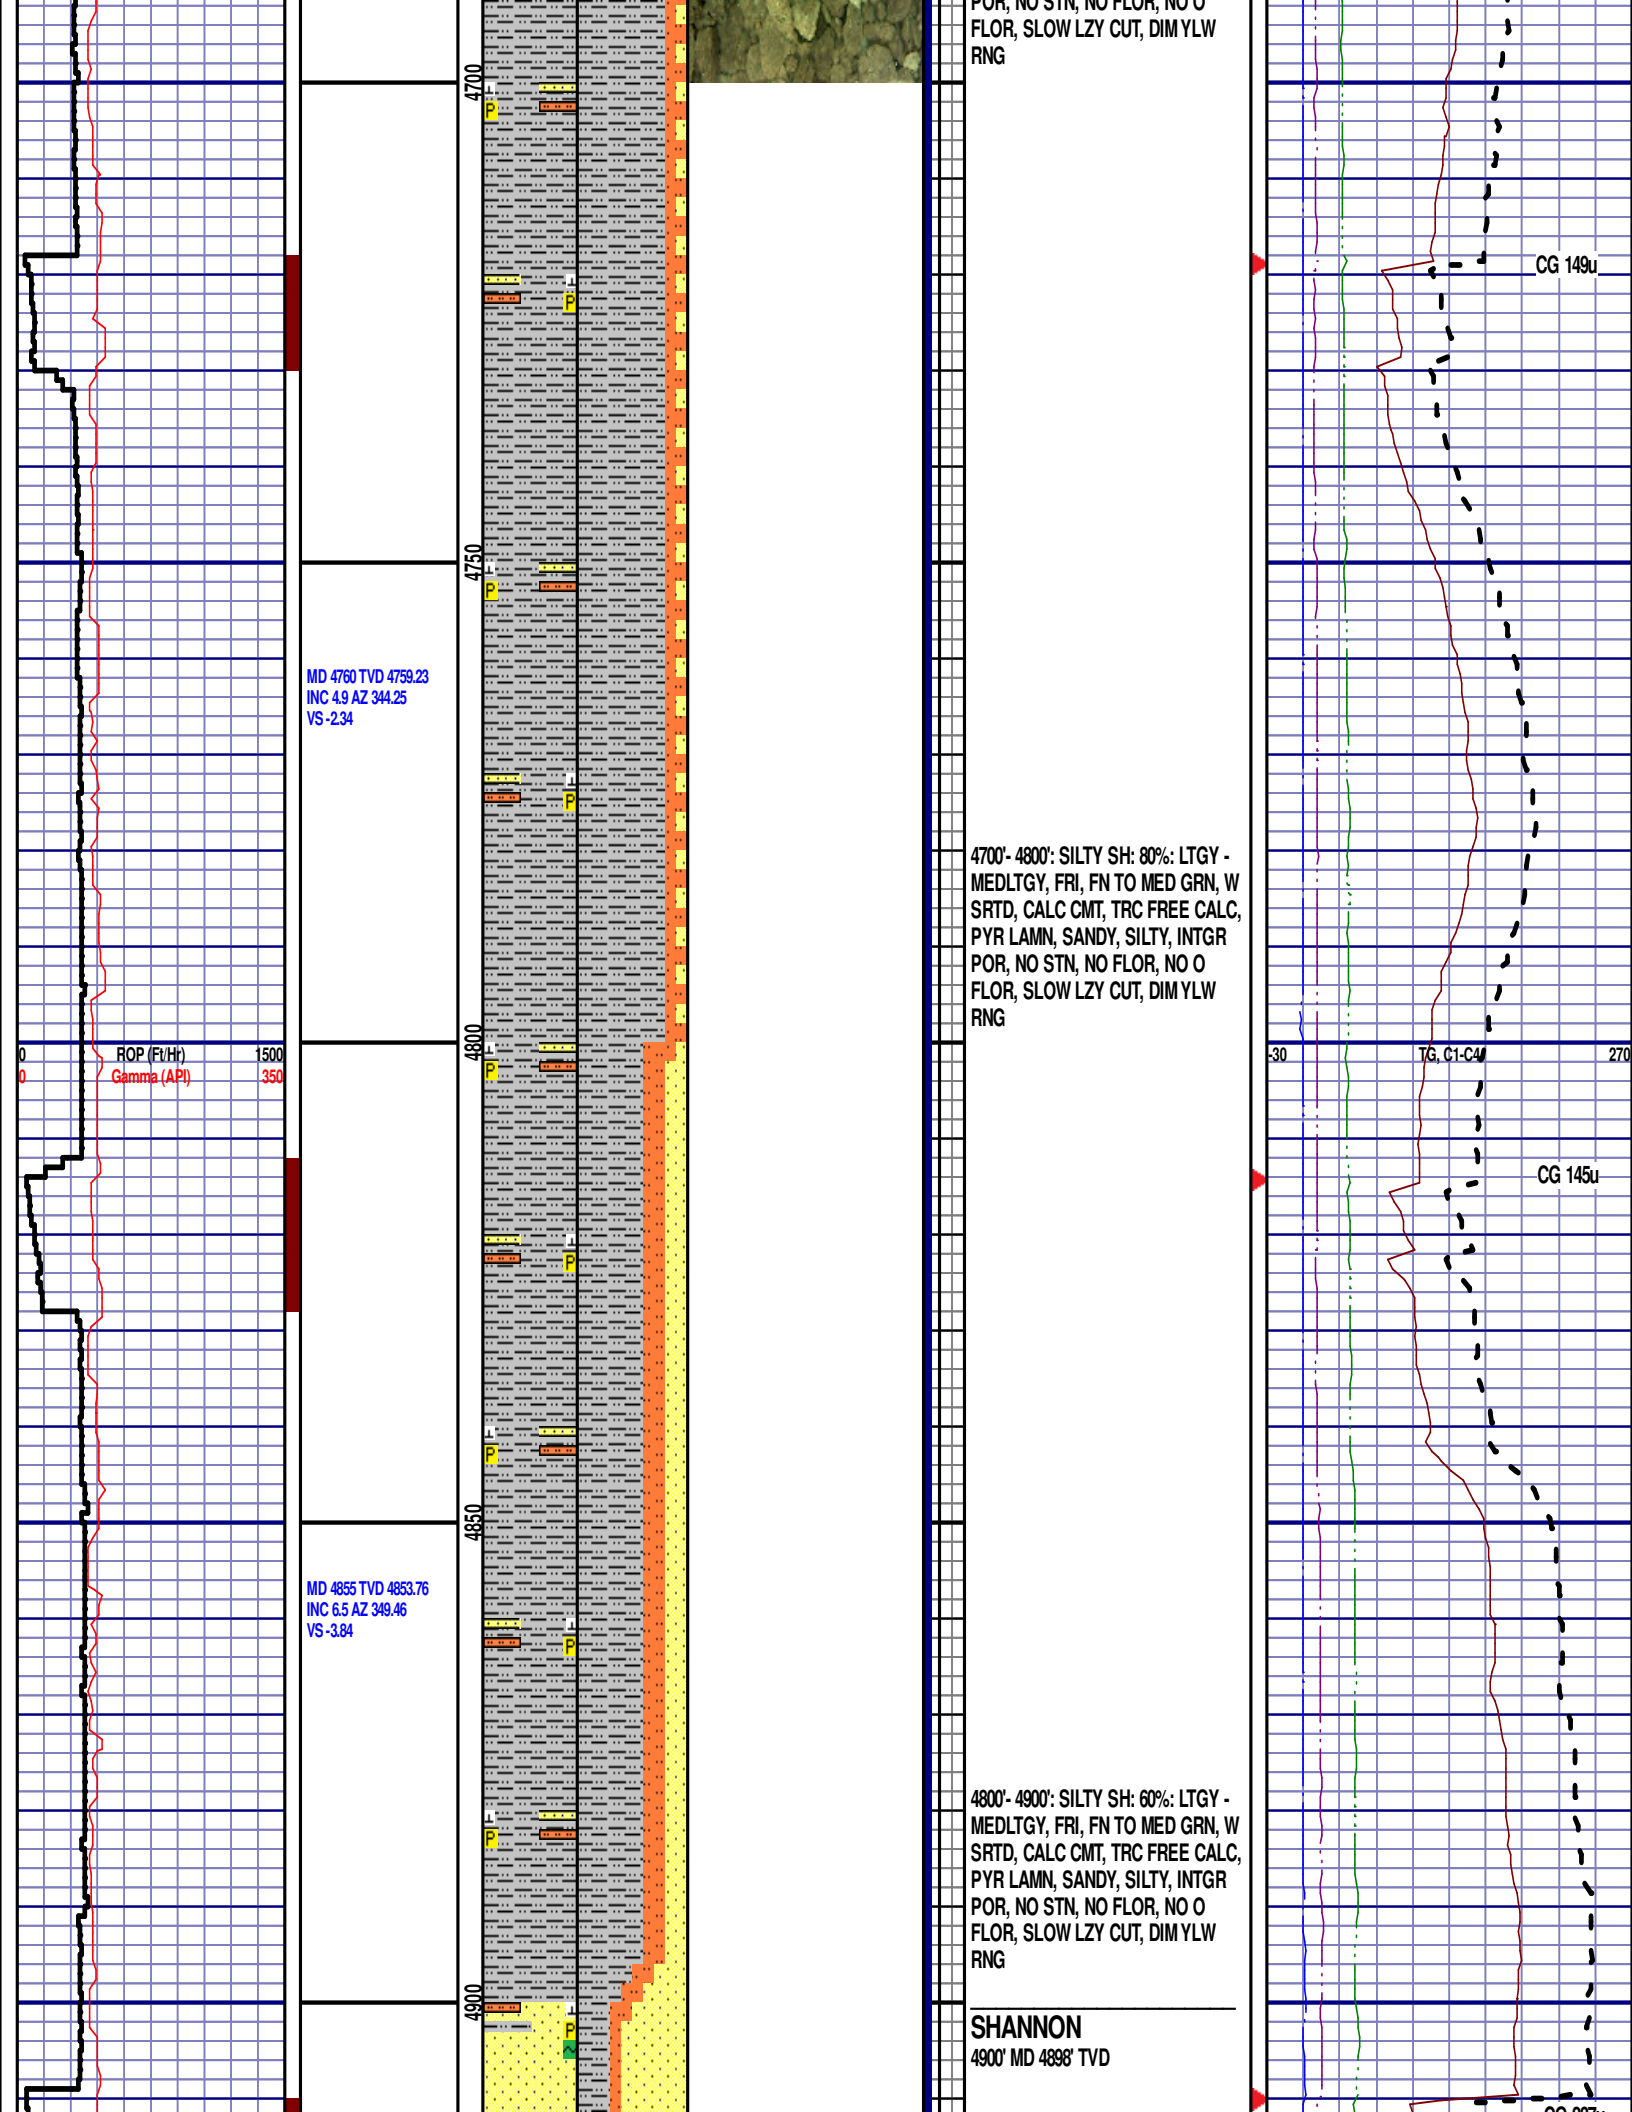

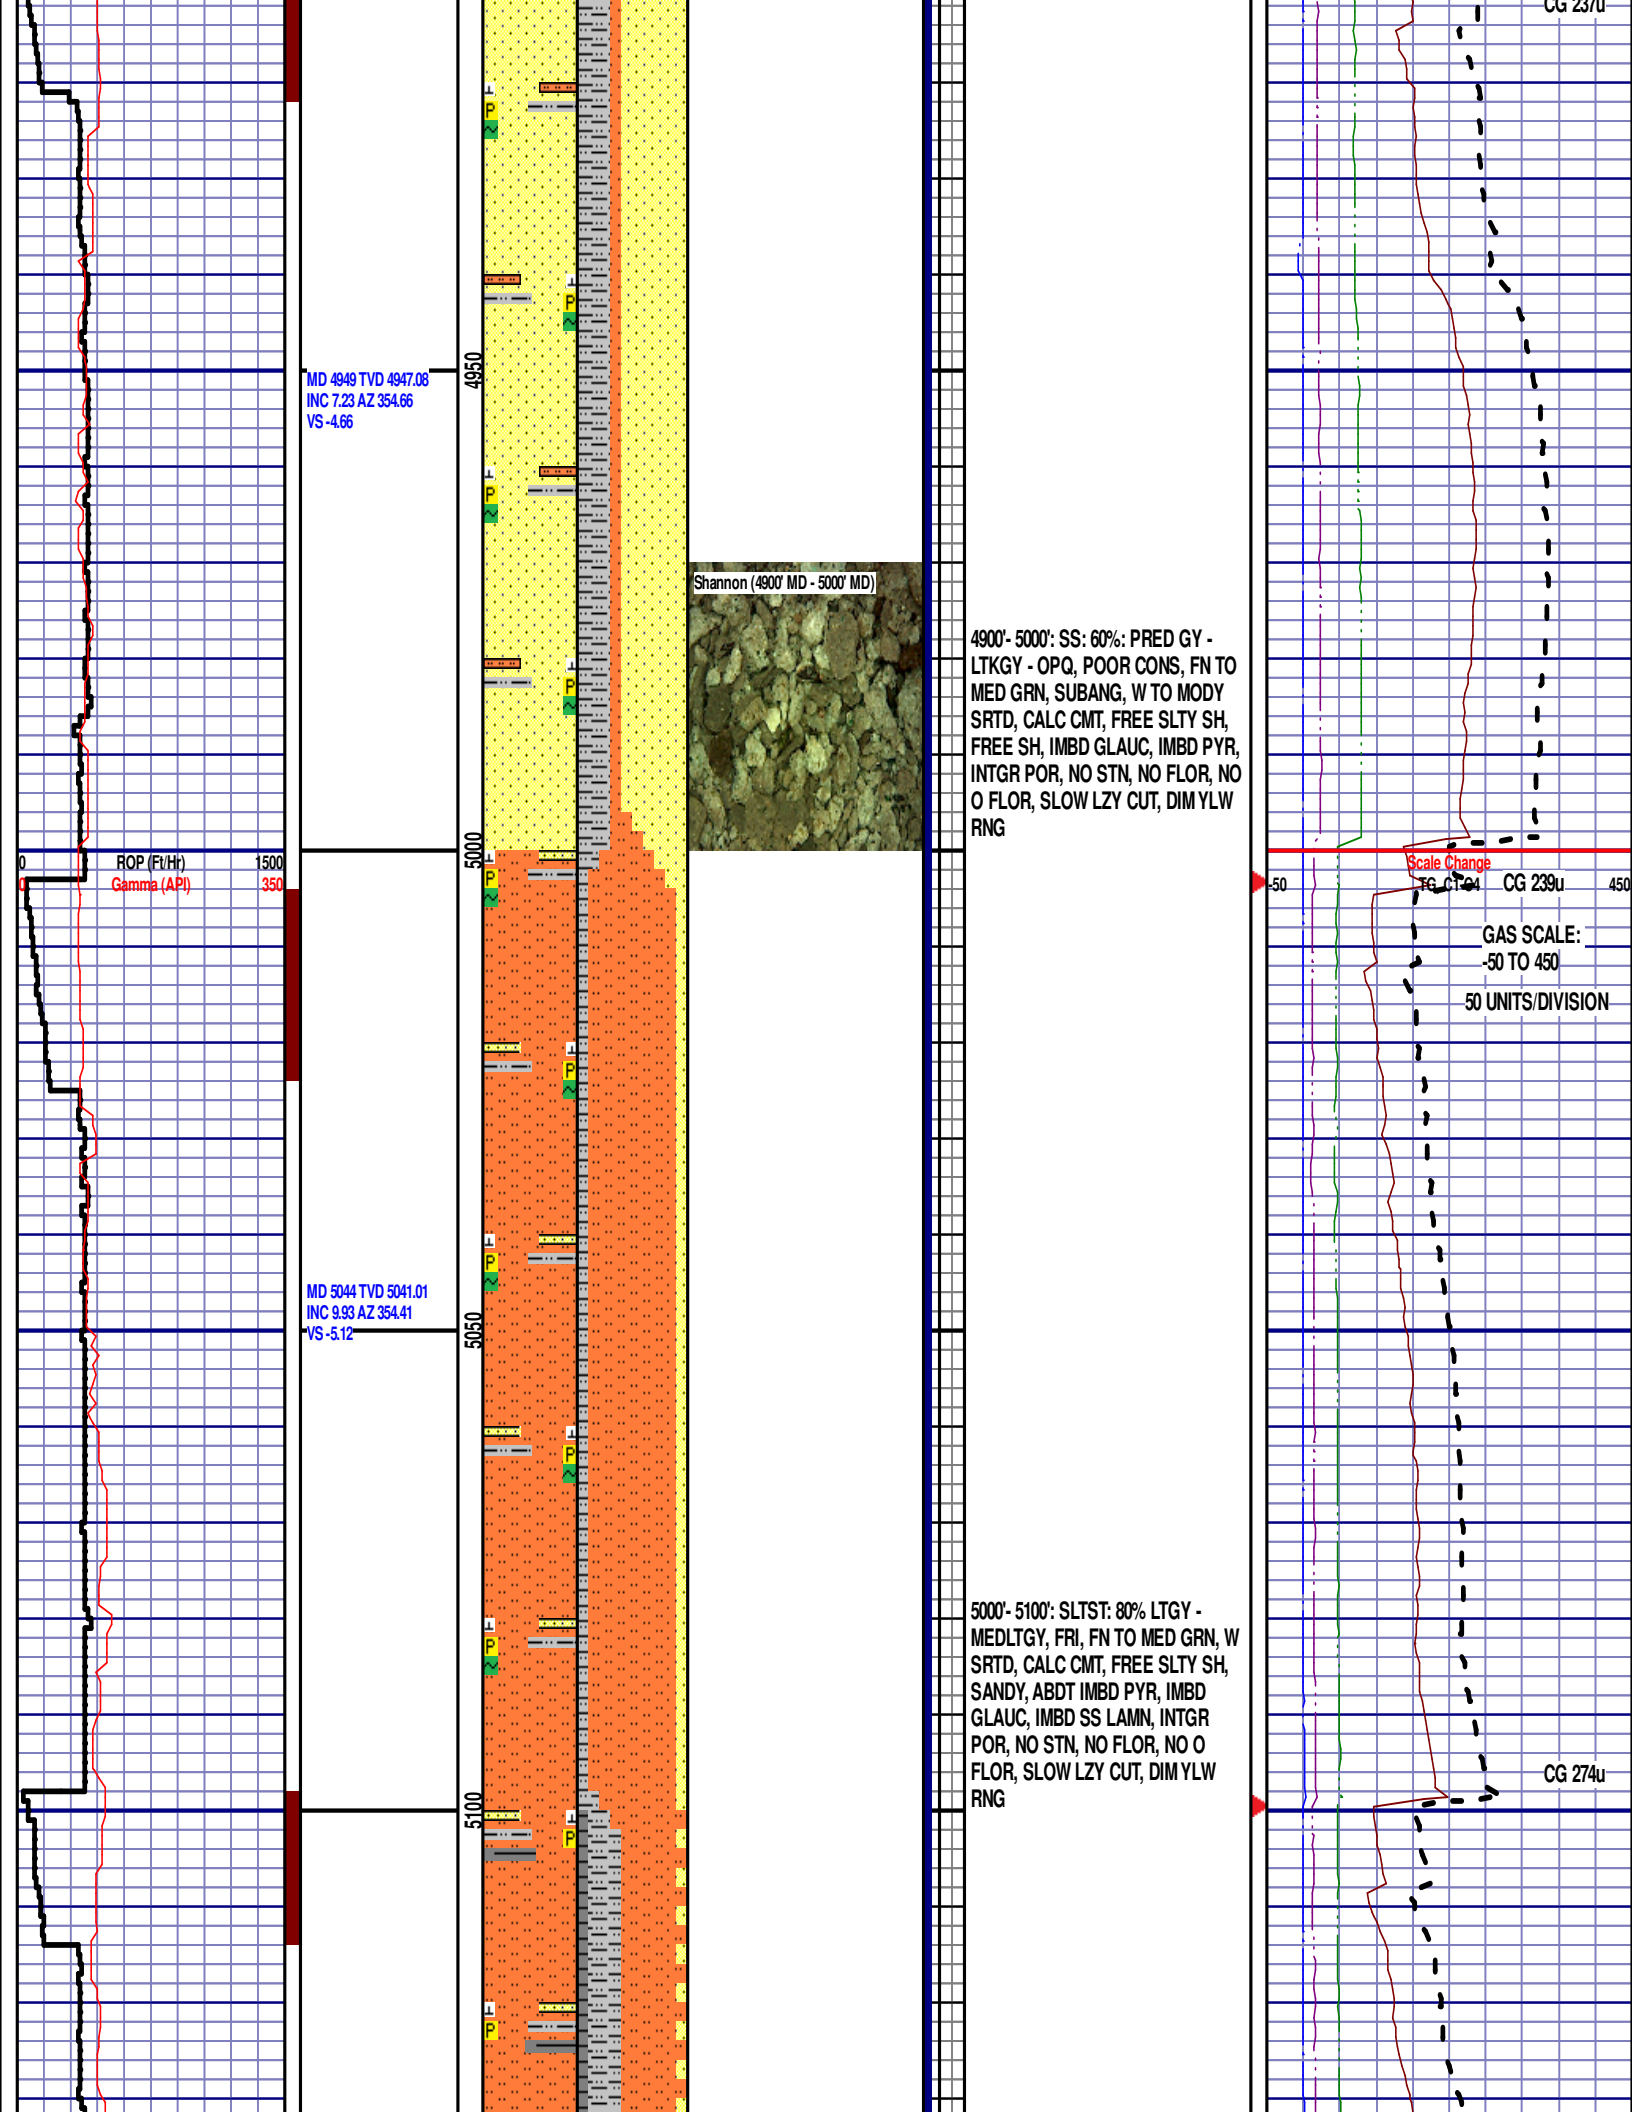

MD 5139 TVD 5134.41
INC 11.14AZ 350.75
VS-6.3

ROP (Ft/Hr)
Gamma (API)

1500
350

MD 5234 TVD 5227.49
INC 11.95AZ 349.96
VS-8.29

MD 5329 TVD 5319.9
INC 14.8 AZ 353.7
VS-9.96

5150


5200

5250

5300

5350

Shannon (5200' MD - 5300' MD)

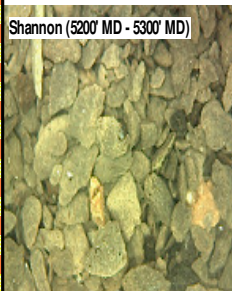


5100'- 5200': SLTST: 55% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SH, FREE
SLTY SH, SANDY, IMBD PYR, IMBD
SS LAMN, INTGR POR, NO STN, NO
FLOR, NO O FLOR, SLOW LZY CUT,
DIM YLW RNG


5200'- 5300': SLTST: 50% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SH, FREE
SLTY SH, SANDY, IMBD PYR, IMBD
SS LAMN, INTGR POR, NO STN, NO
FLOR, NO O FLOR, SLOW LZY CUT,
DIM YLW RNG

CG 251u


TG, C1-C4

CG 323u

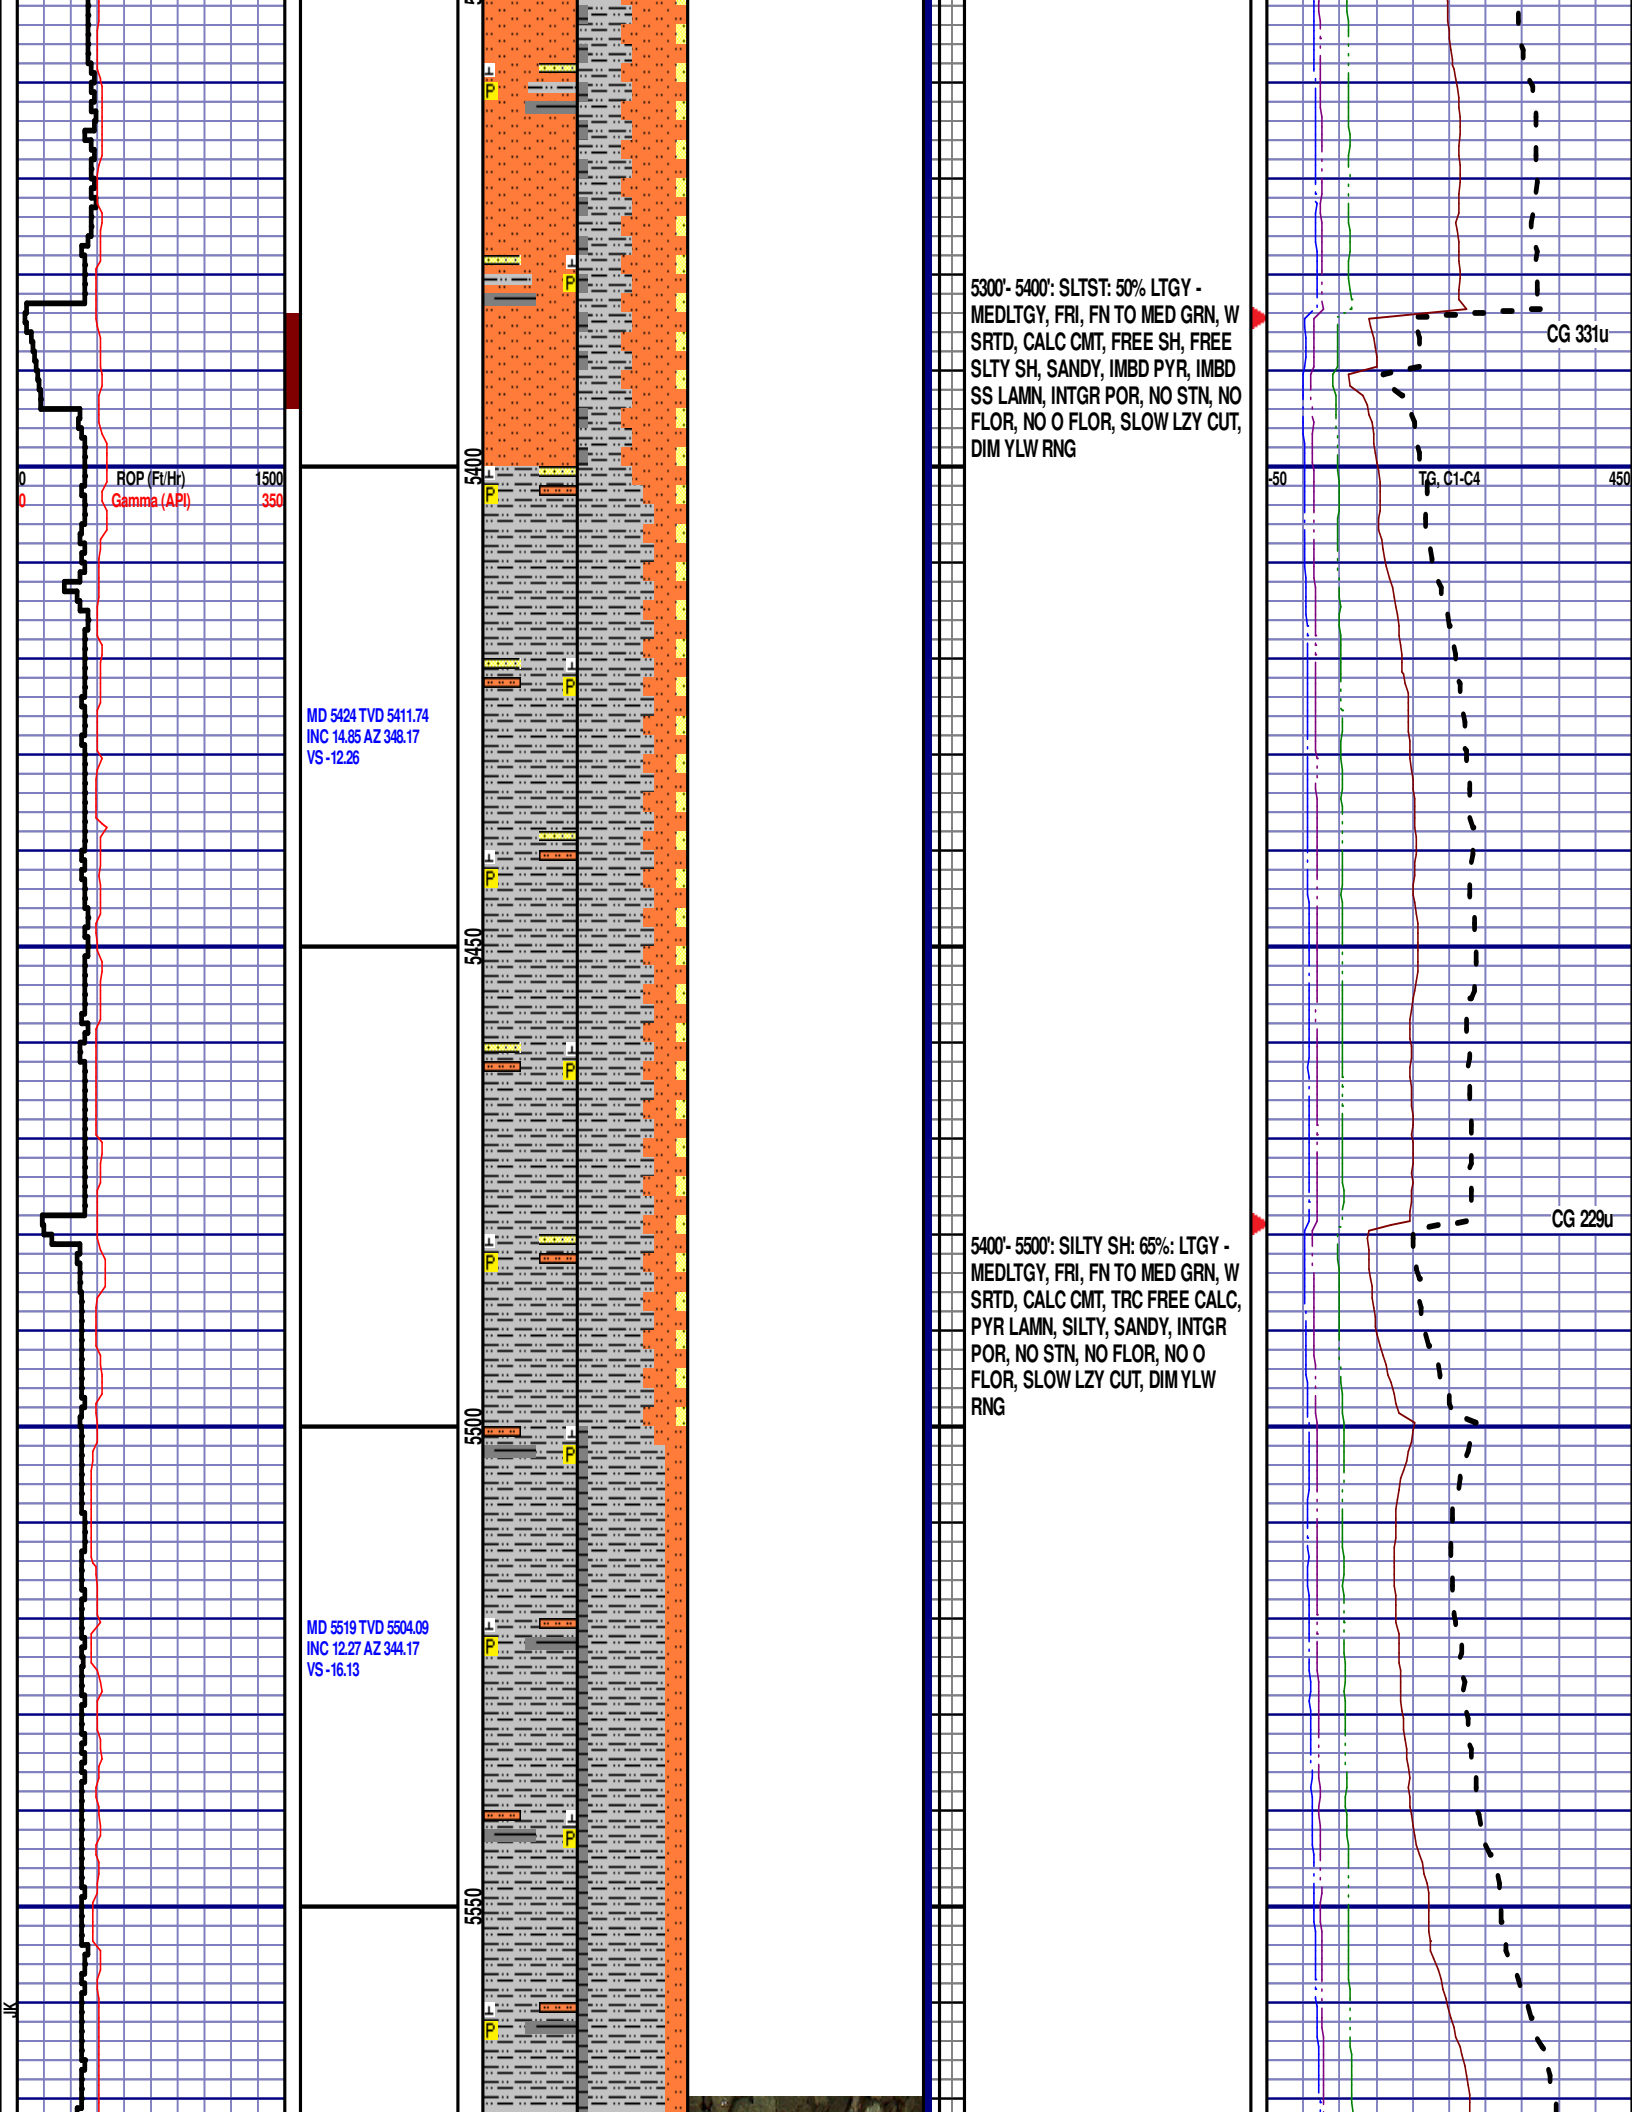

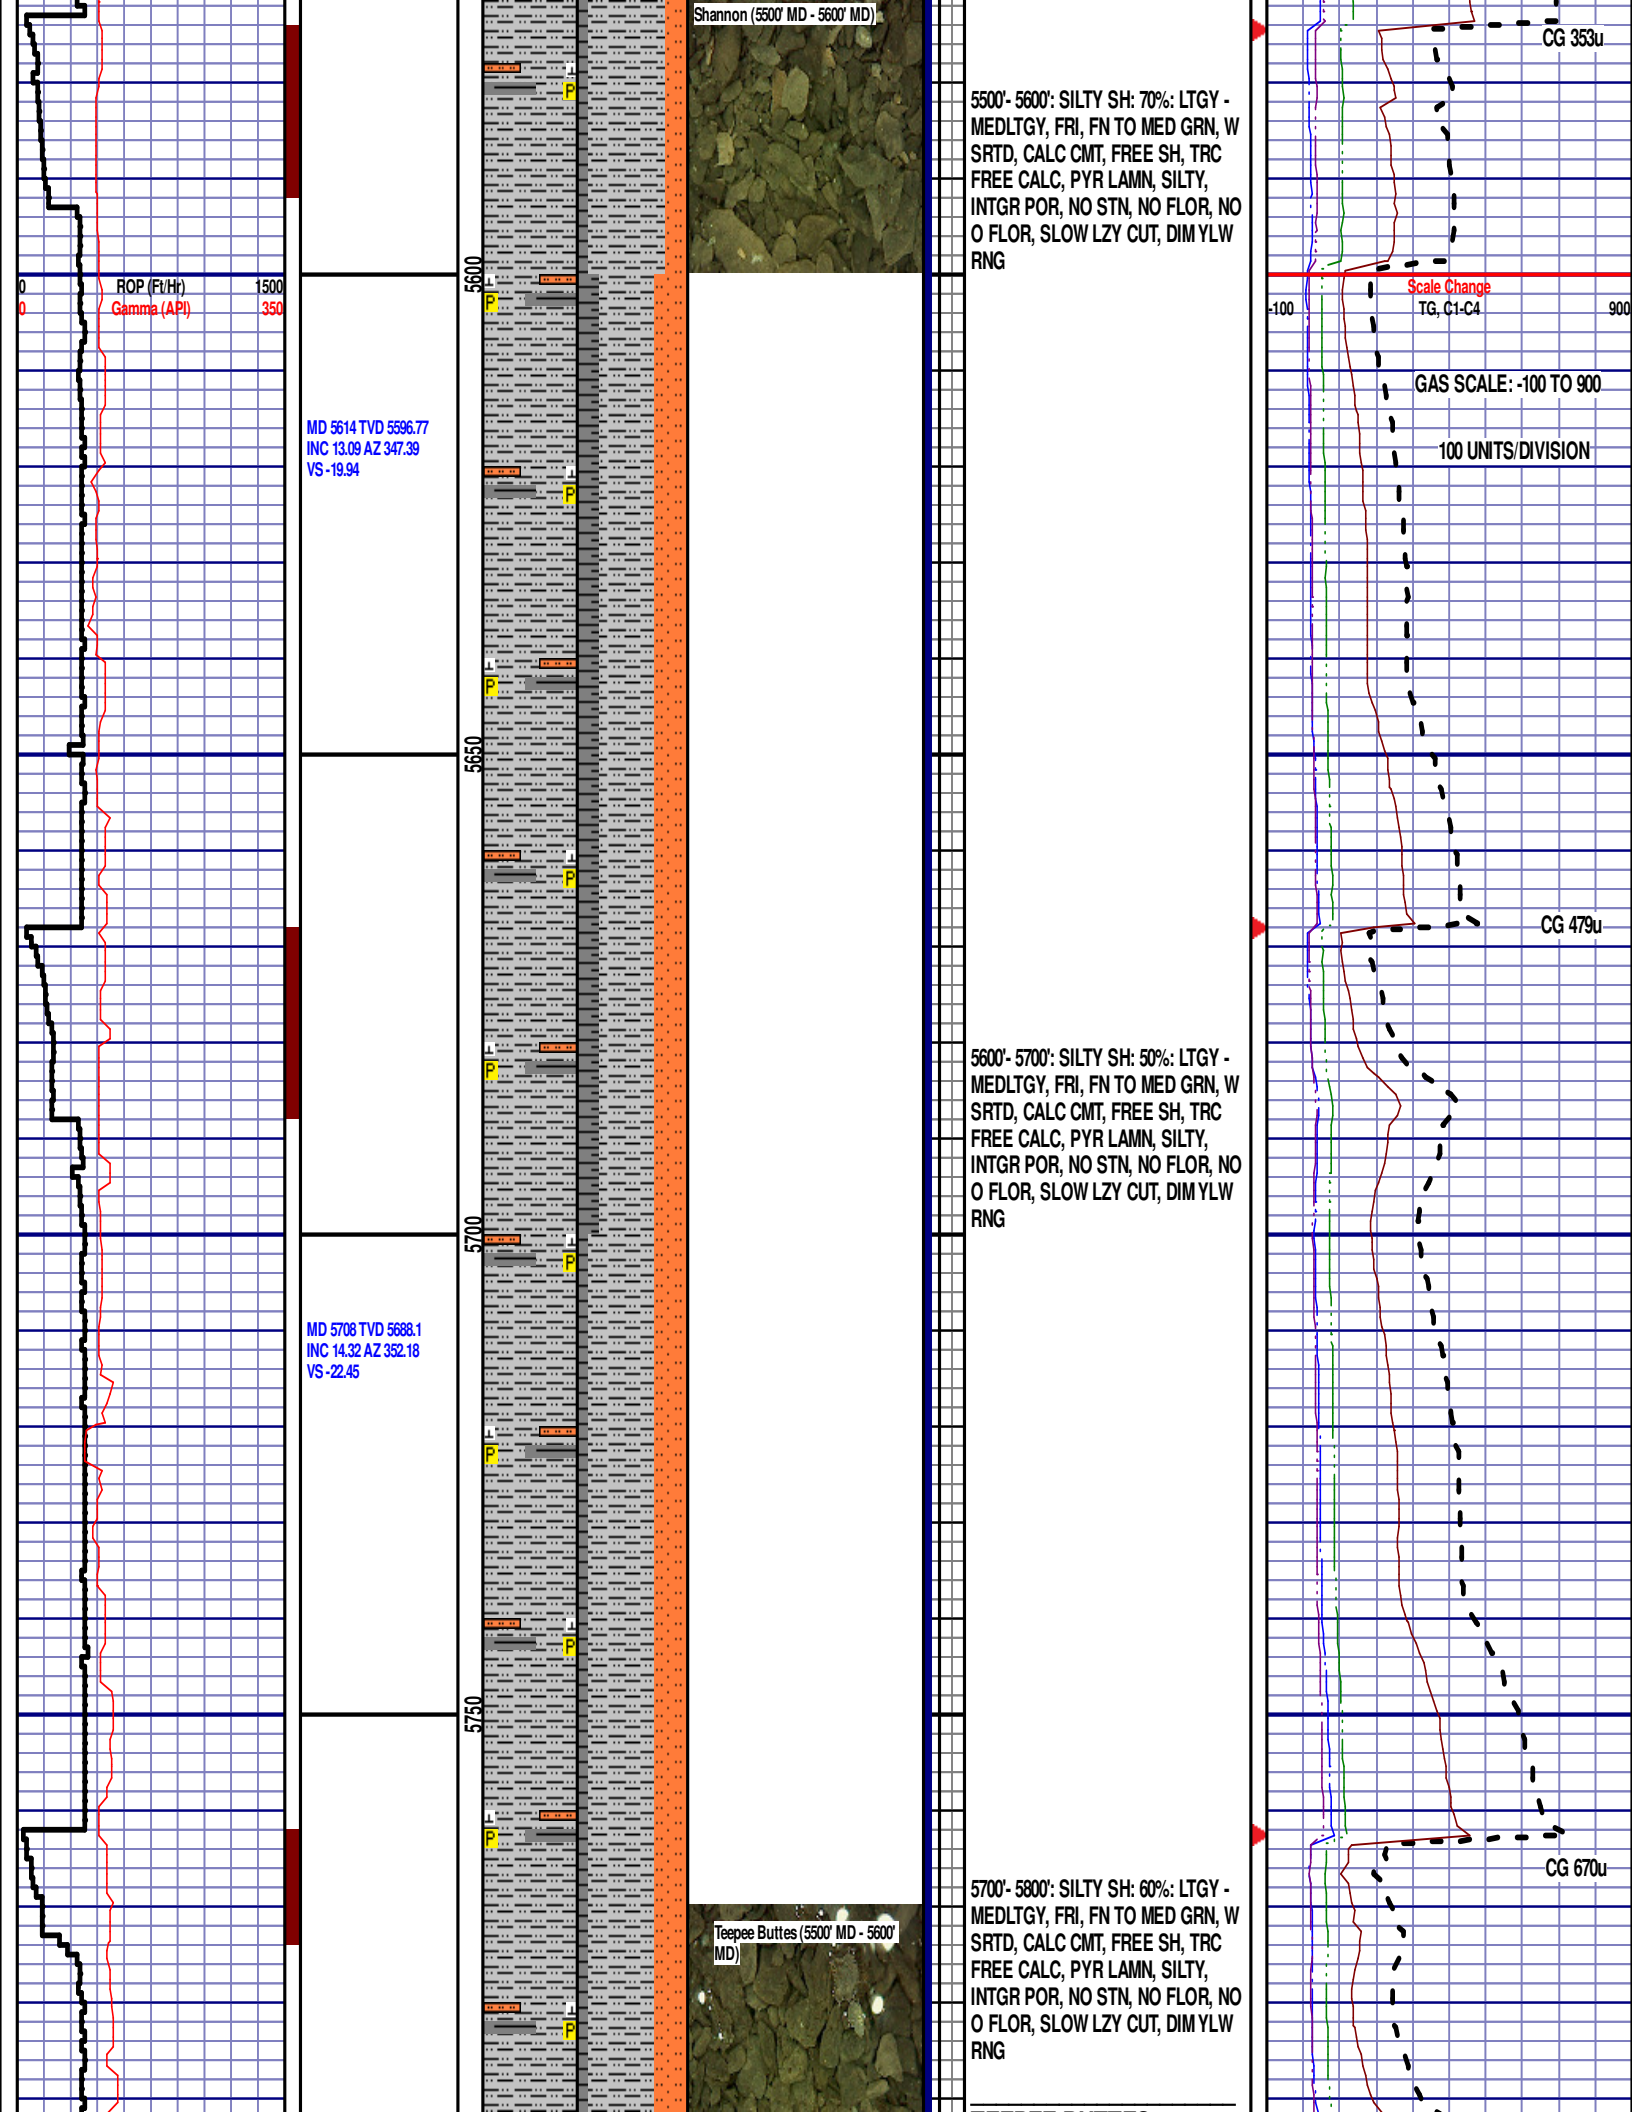

TEEPREE BUTTES
5790' MD 5768' TVD

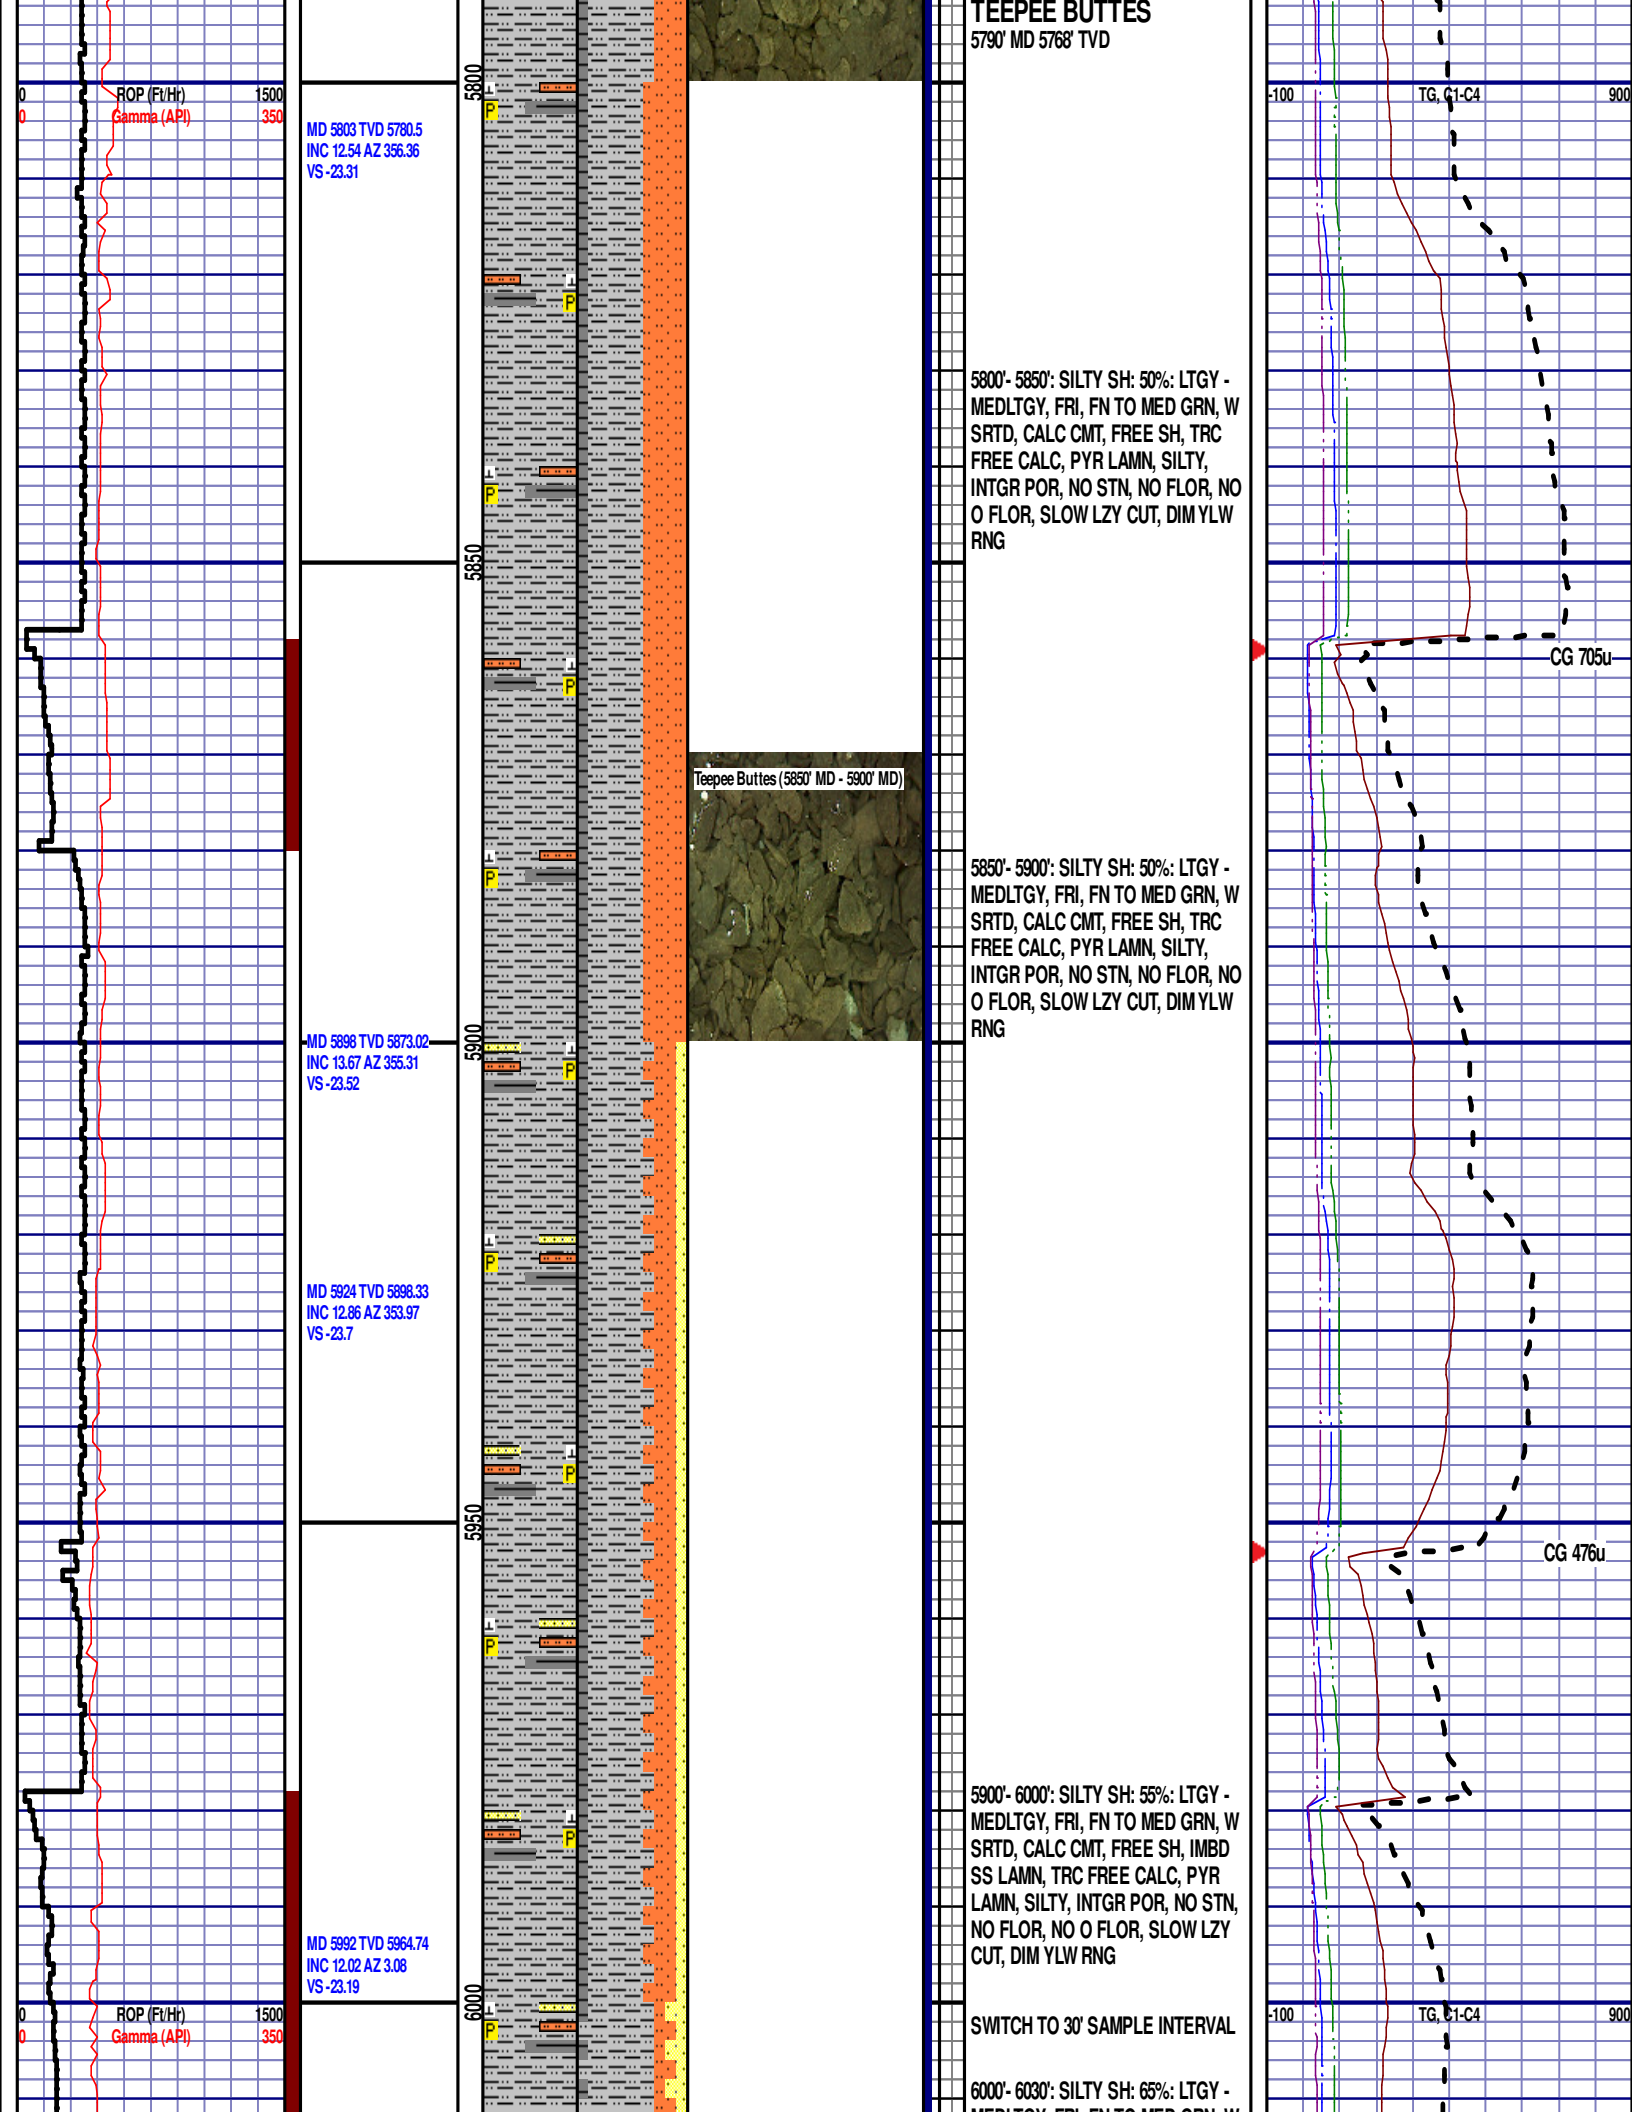

MD 5803 TVD 5780.5
INC 12.54 AZ 356.36
VS -23.31

MD 5898 TVD 5873.02
INC 13.67 AZ 355.31
VS -23.52

MD 5924 TVD 5898.33
INC 12.86 AZ 353.97
VS -23.7

MD 5992 TVD 5964.74
INC 12.02 AZ 3.08
VS -23.19

5800'- 5850': SILTY SH: 50%: LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SH, TRC
FREE CALC, PYR LAMN, SILTY,
INTGR POR, NO STN, NO FLOR, NO
O FLOR, SLOW LZY CUT, DIM YLW
RNG

5850'- 5900': SILTY SH: 50%: LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SH, TRC
FREE CALC, PYR LAMN, SILTY,
INTGR POR, NO STN, NO FLOR, NO
O FLOR, SLOW LZY CUT, DIM YLW
RNG

5900'- 6000': SILTY SH: 55%: LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SH, IMBD
SS LAMN, TRC FREE CALC, PYR
LAMN, SILTY, INTGR POR, NO STN,
NO FLOR, NO O FLOR, SLOW LZY
CUT, DIM YLW RNG

SWITCH TO 30' SAMPLE INTERVAL

6000'- 6030': SILTY SH: 65%: LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, FREE SH, IMBD
SS LAMN, TRC FREE CALC, PYR
LAMN, SILTY, INTGR POR, NO STN,
NO FLOR, NO O FLOR, SLOW LZY
CUT, DIM YLW RNG

Teepee Buttes (5850' MD - 5900' MD)

