

DAVISON MD 27-4

API# 05-013-06289 KB = 5,284'  
GL = 5,274'

Surface CSG


Hole size: 12-1/4"  
CSG size: 8-5/8"  
Weight: 24 lbs/ft  
Bottom: 951'  
Cement: 600 sx to Surface

Production CSG

hole size: 7-7/8"  
CSG size: 3-1/2"  
Weight: 7.7 lbs/ft  
Bottom: 8,535'  
Cement: 260 sx, TOC = 7,390'

Tubing

OD 2-1/6"  
EOT: 8,050'

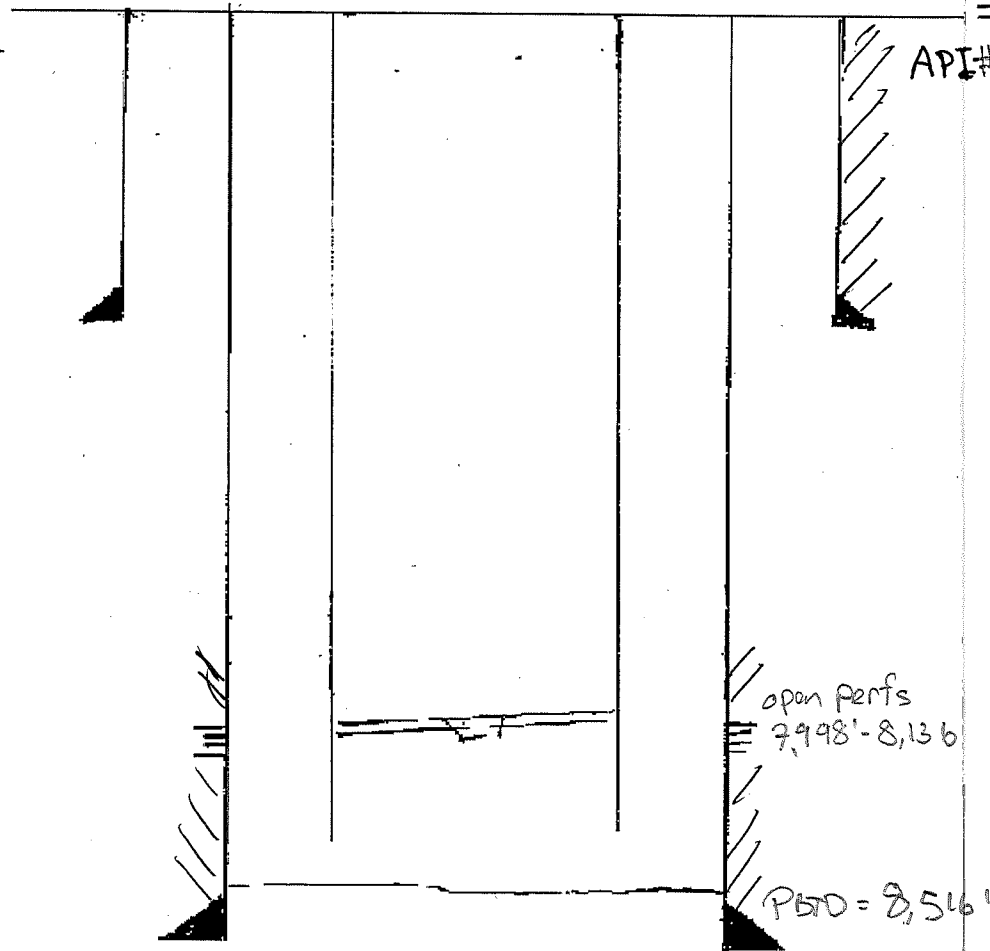

MD DAVISON

CUT OFF WELL HEAD  
4' BELOW GROUND LEVEL

PUMP 55 SX 100' TO SURF

8 5/8" 24# casing  
SET @ 951'

PUMP 100 SX SHOE PLUG  
FROM 1008' TO 784'

PUMP 50 SX PLUG  
FROM 3,498' TO 3,321' (CALC)

CUT CASING @ 4,025'

PUMP 50 SX STUB PLUG  
FROM 4,079' - 5,975' (CALC)

3 1/2" 7.7# CASING  
SET @ 8,535'

2 SX CEMENT @  
CIBP @

PERFS @  
7,998 to 8,136'  
NIAGARA

