
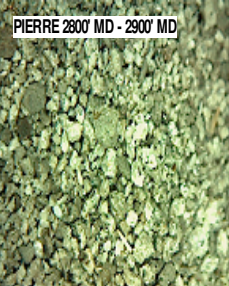


MD 2782 TVD 2778.8
INC 7.48 AZ 204.77
VS 30.61


MD 2877 TVD 2872.89
INC 8.4 AZ 206.62
VS 37.09

WOB 4K
PP 2451
RPM 25

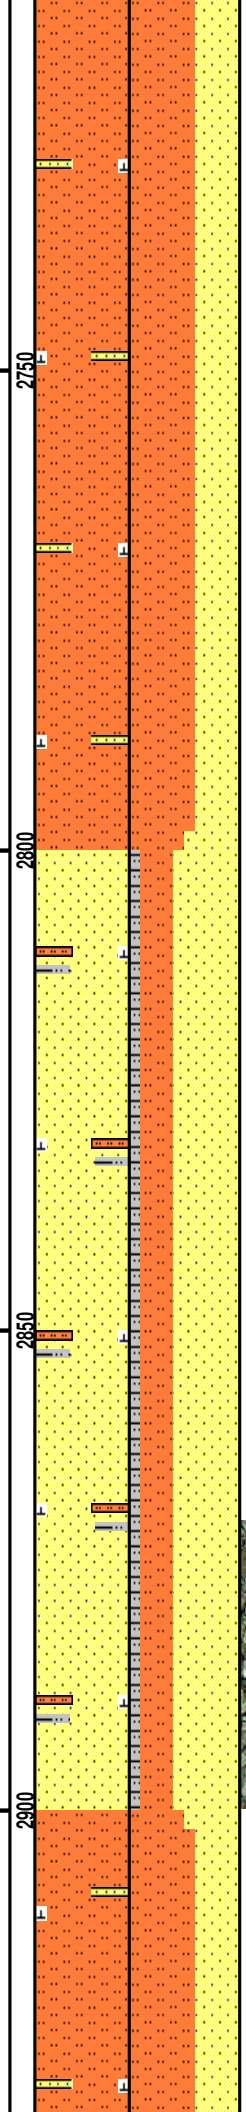

2700' MD-2800' MD: SLTST: 60% LTGY
- MEDLTGY, FRI, FN TO MED GRN,
W SRTD, CALC CMT, SANDY, INTGR
POR, NO STN, NO FLOR, NO O
FLOR, NO CUT, NO RNG


2800' MD-2900' MD: SS: 60%: PRED
MEDGY - LTKGY -
OPQ, LSEY - MOD CONS, FN TO
MED GRN, SUBANG, W SRTD, CALC
CMT, FREE SLTST, FREE SLTY SH,
INTGR POR, NO STN, NO FLOR, NO
O FLOR, NO CUT, NO RNG

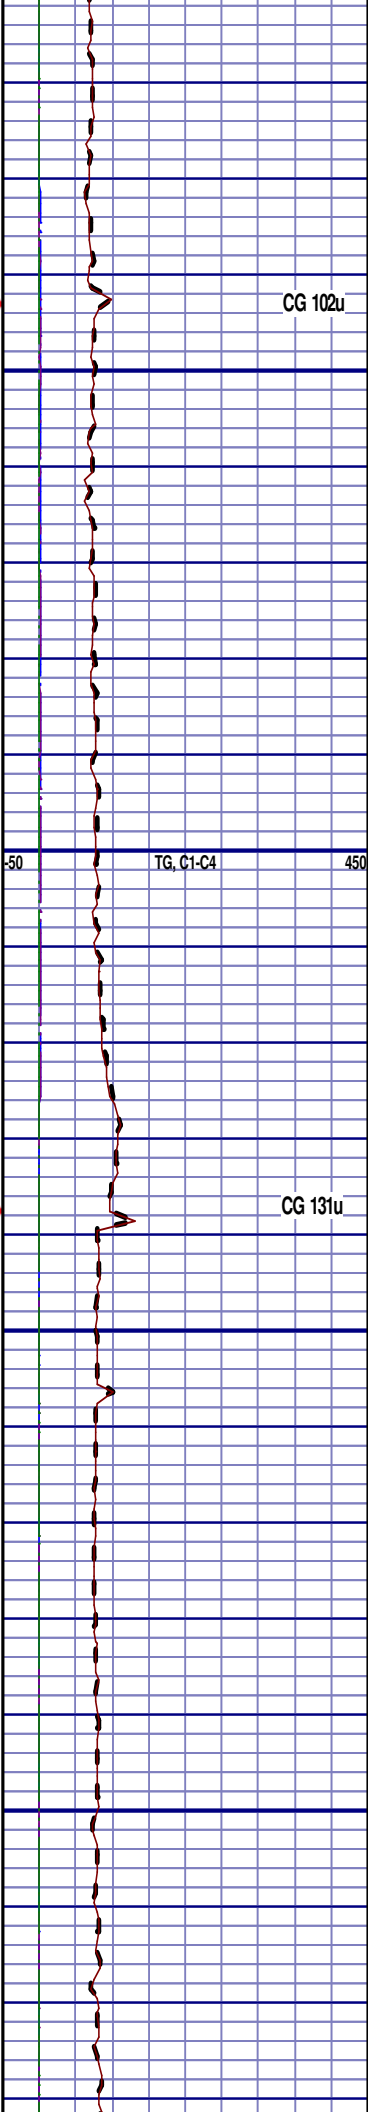

CG 102u

TG, C1-C4


CG 131u

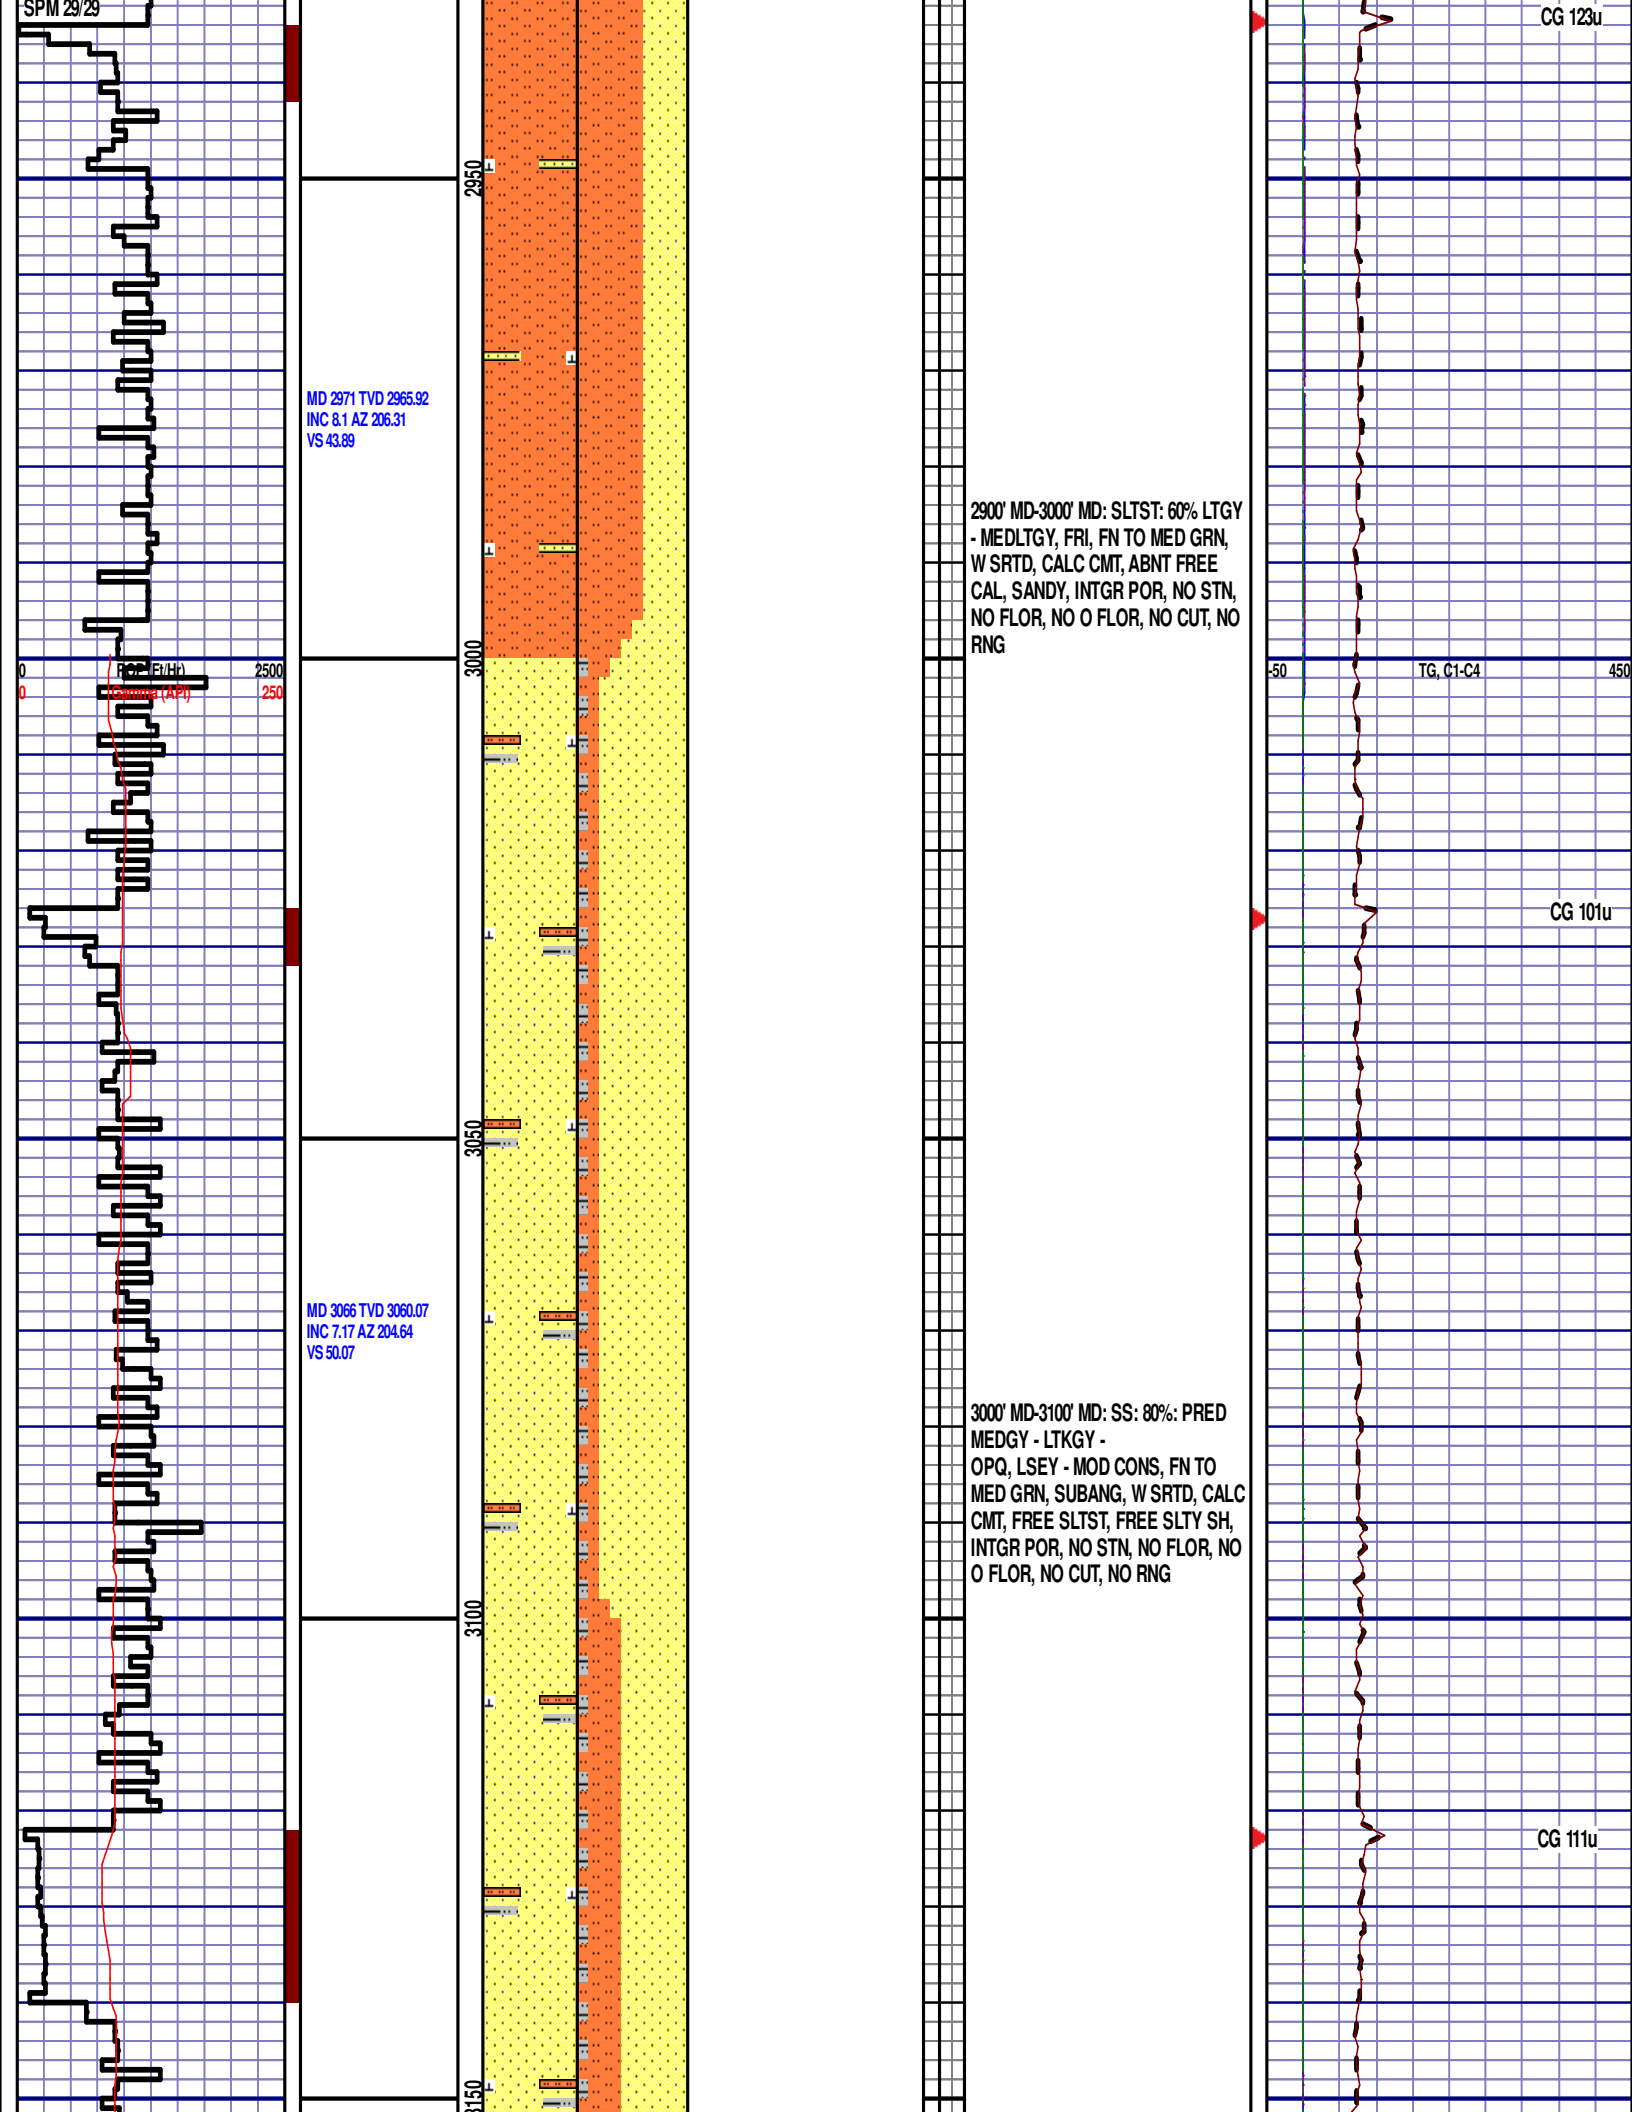

MD 3160 TVD 3153.26
INC 7.91 AZ 202.56
VS 55.74

MD 3254 TVD 3246.3
INC 8.52 AZ 204.26
VS 61.89

MD 3349 TVD 3340.44
INC 6.83 AZ 205.18
VS 67.94

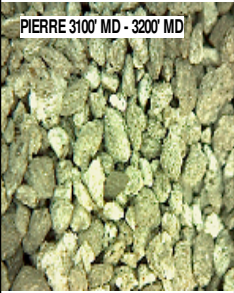



3100' MD-3200' MD: SS: 60%: PRED
MEDGY - LTKGY -
OPQ, LSEY - MOD CONS, FN TO
MED GRN, SUBANG, W SRTD, CALC
CMT, FREE SLTST, FREE SLTY SH,
INTGR POR, NO STN, NO FLOR, NO
O FLOR, NO CUT, NO RNG

3200' MD-3300' MD: SLTYSH: 50%
PRED MEDDRKGY, SUBSPLT, F TXT,
SFT, IMBD CALC, IMBD PYR, FREE
SLTST, FREE SS, INTGR POR, NO
STN, NO FLOR, NO O FLOR, NO
CUT, NO RNG

CG 89u

CG 96u

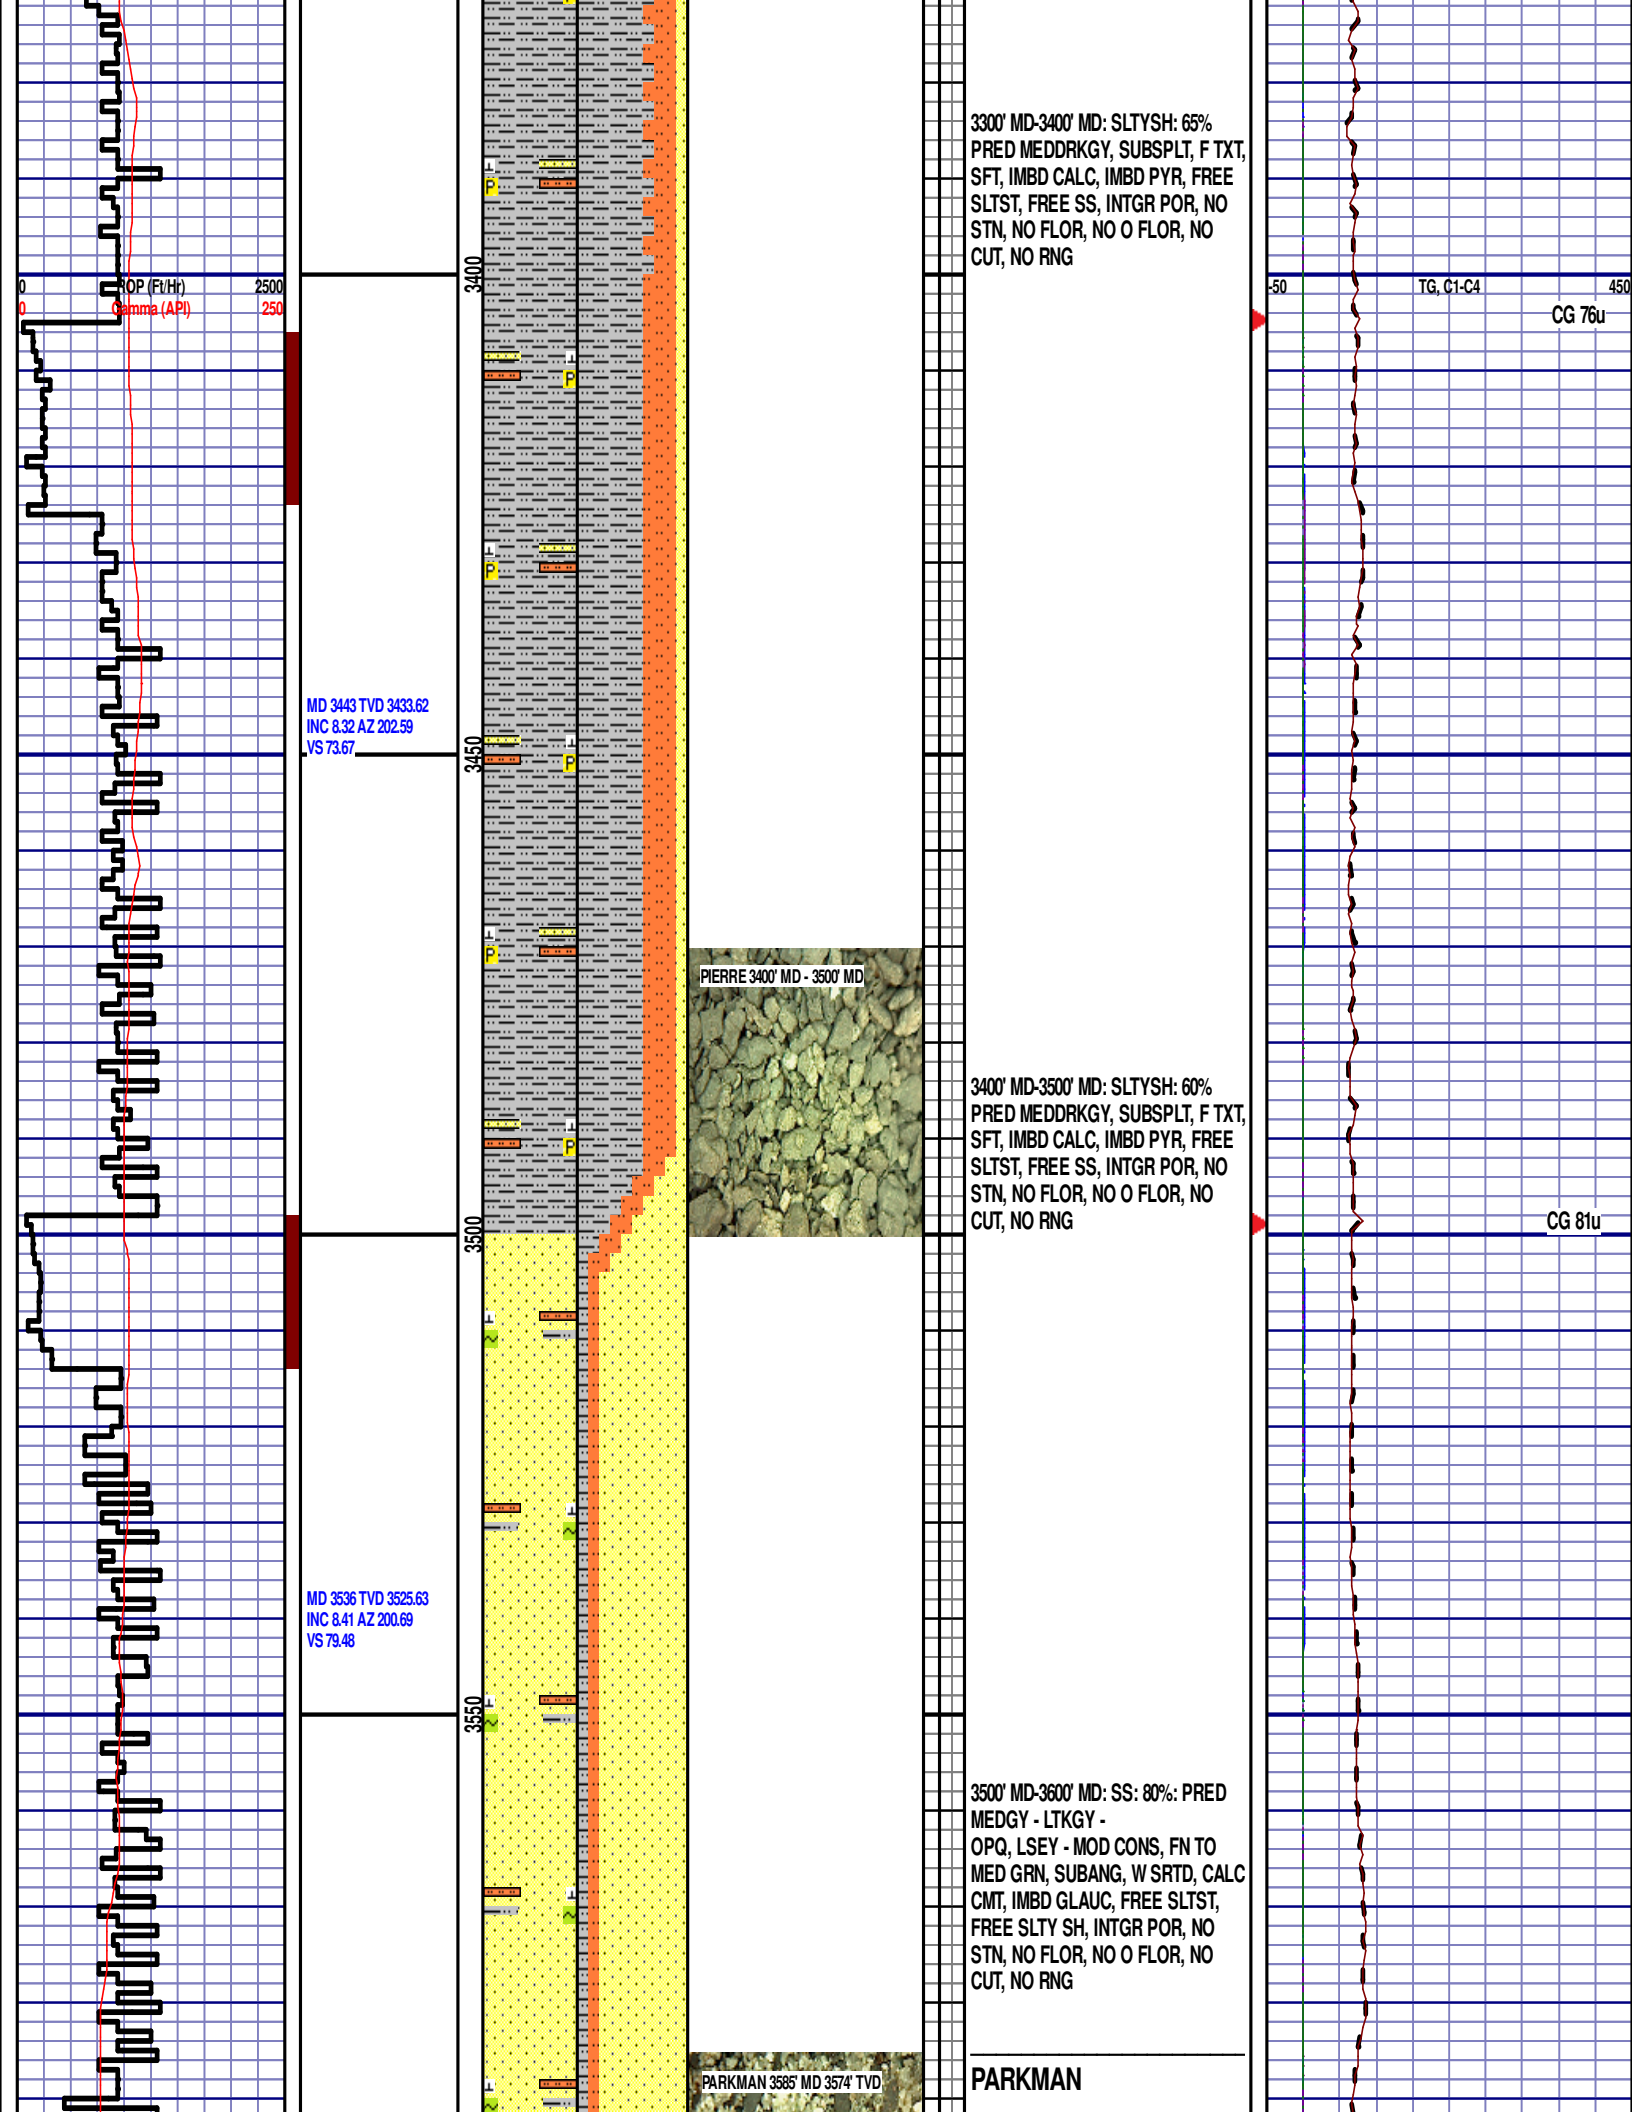

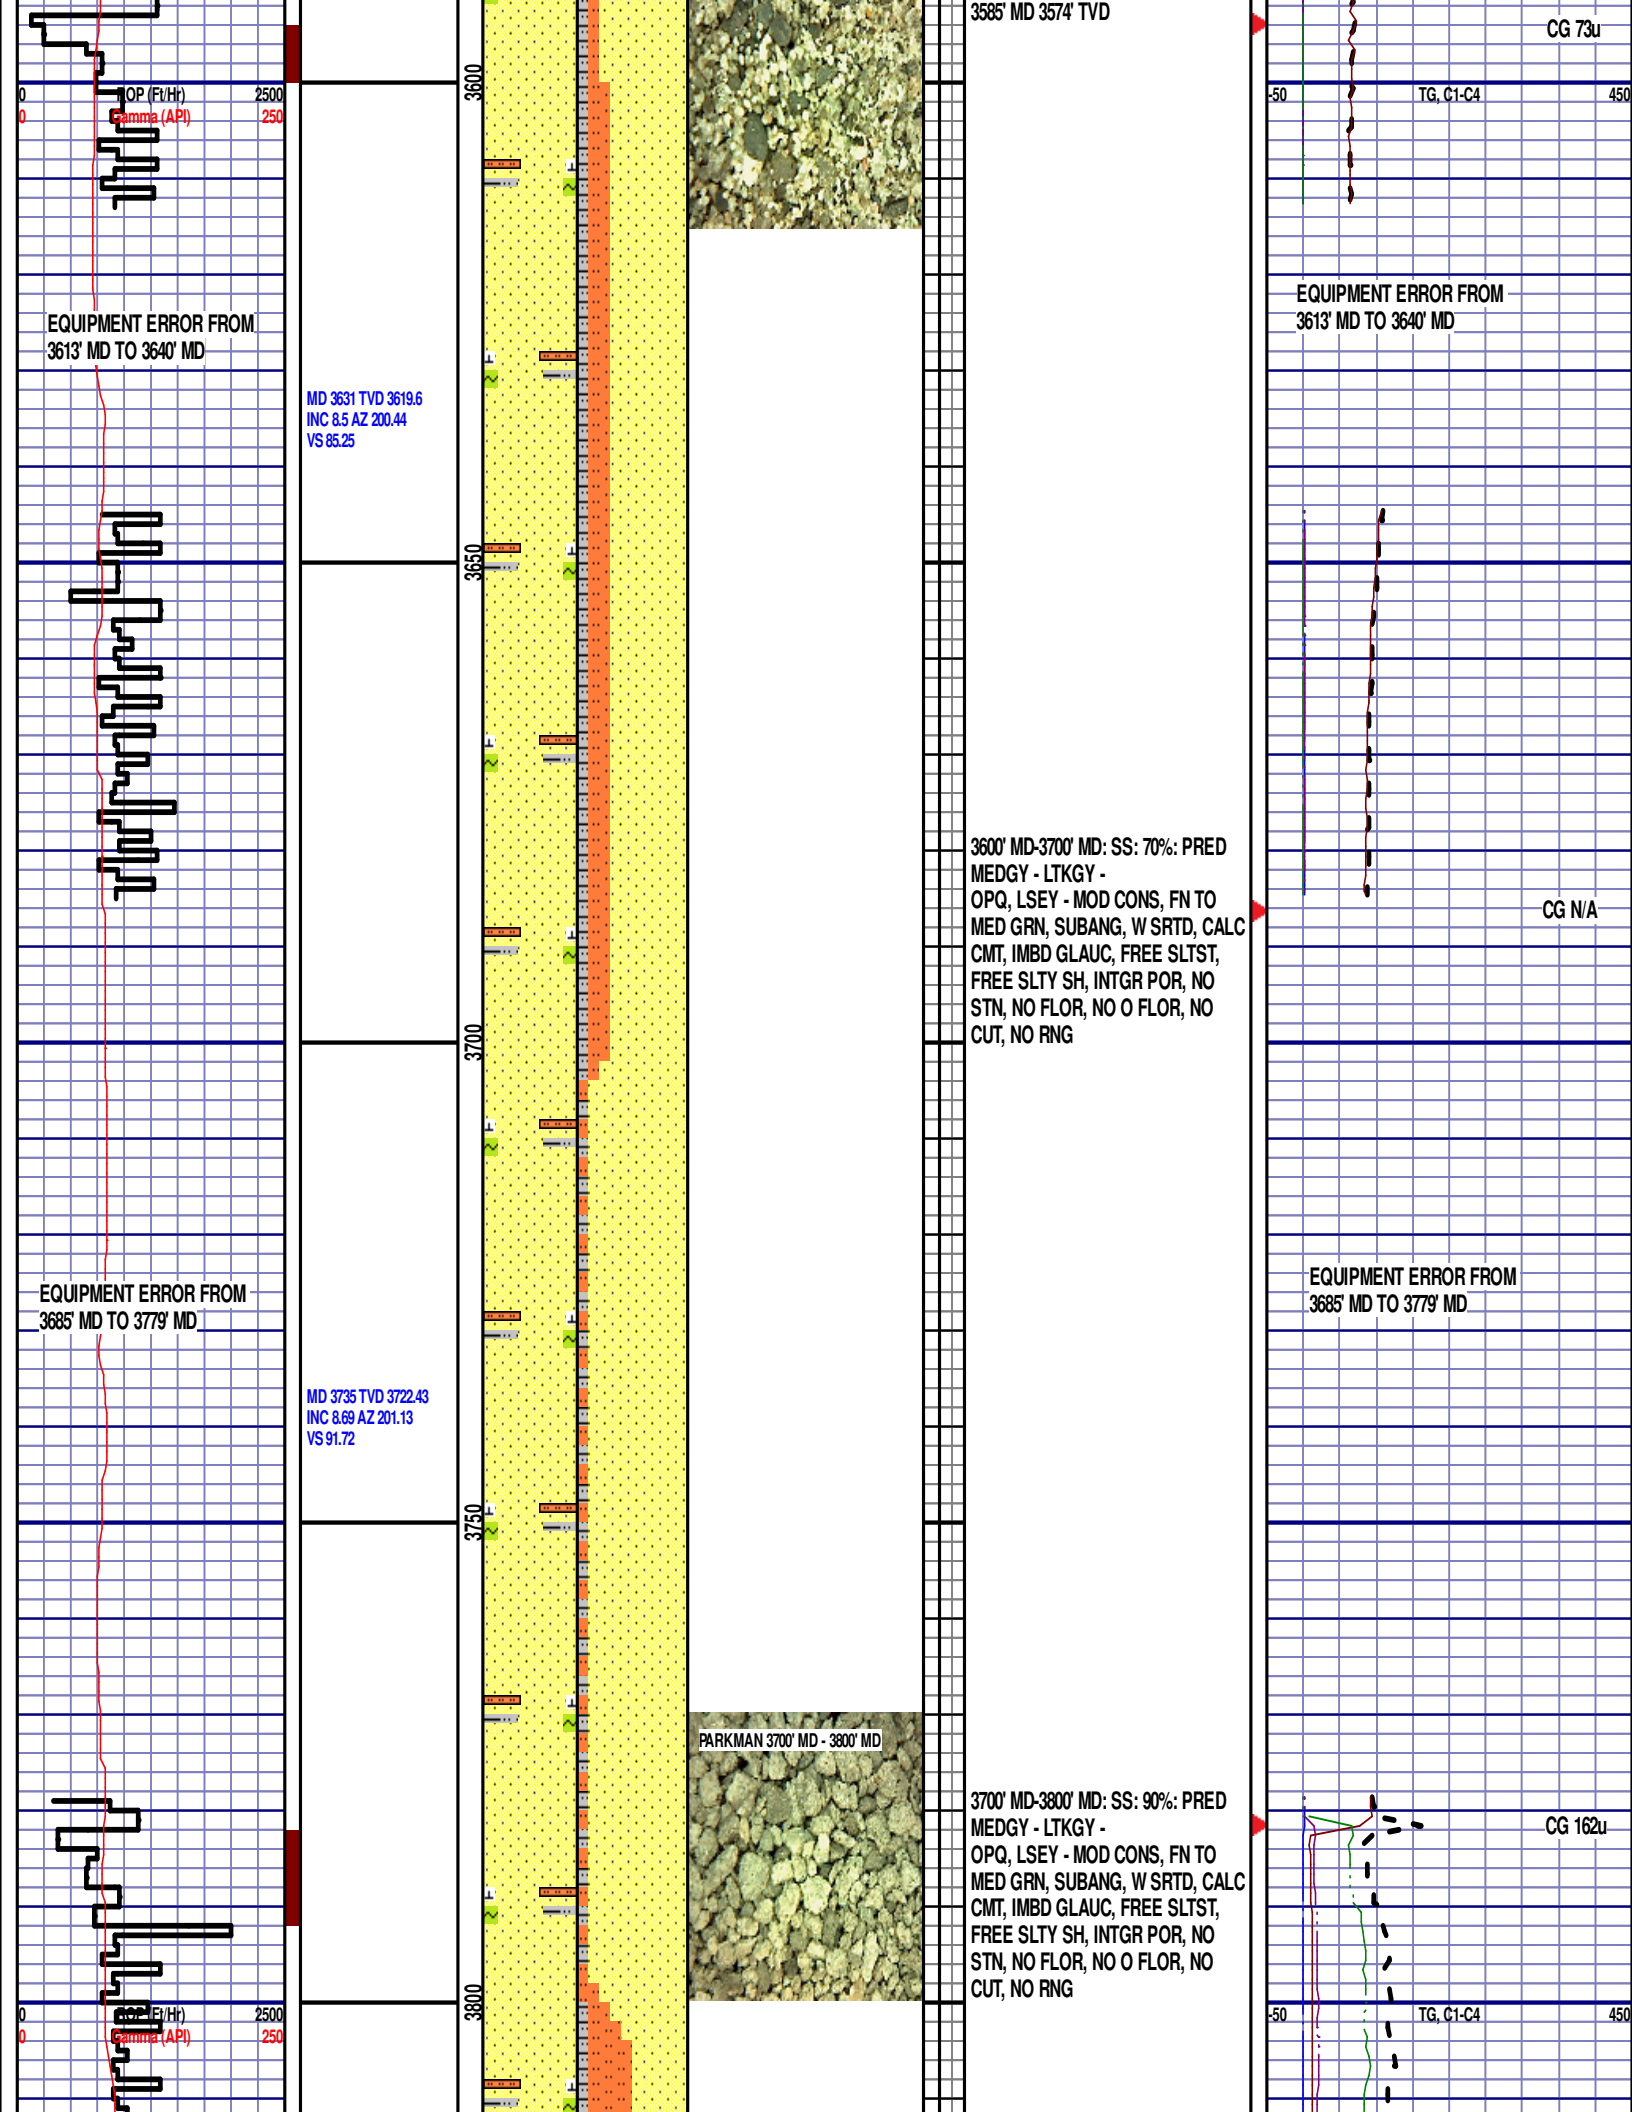

MD 3819 TVD 3805.42
INC 9.08 AZ 199.99
VS 97.07

MD 3914 TVD 3899.22
INC 9.16 AZ 199.35
VS 103.07

MD 4008 TVD 3992.19
INC 7.77 AZ 200.45
VS 108.62

ROP (Ft/Hr) 2500
Gamma (API) 250
12:01AM
2/23/2014
DAY 02
1505 FT/24HRS
WOB 20.9K
PP 3810
RPM 81
SPM 67/67

3850

3900

3950

4000


3800' MD-3900' MD: SS: 50%: PRED
MEDGY - LTKGY -
OPQ, LSEY - MOD CONS, FN TO
MED GRN, SUBANG, W SRTD, CALC
CMT, IMBD GLAUC, FREE SLTST,
FREE SLTY SH, INTGR POR, NO
STN, NO FLOR, NO O FLOR, NO
CUT, NO RNG

3900' MD-4000' MD: SS: 60%: PRED
MEDGY - LTKGY -
OPQ, LSEY - MOD CONS, FN TO
MED GRN, SUBANG, W SRTD, CALC
CMT, IMBD GLAUC, FREE SLTST,
FREE SLTY SH, INTGR POR, NO
STN, NO FLOR, NO O FLOR, WEAK
LZY CUT, LT BLSHWT RNG

CG 157u

CG 150u


-50 TG, C1-C4 450

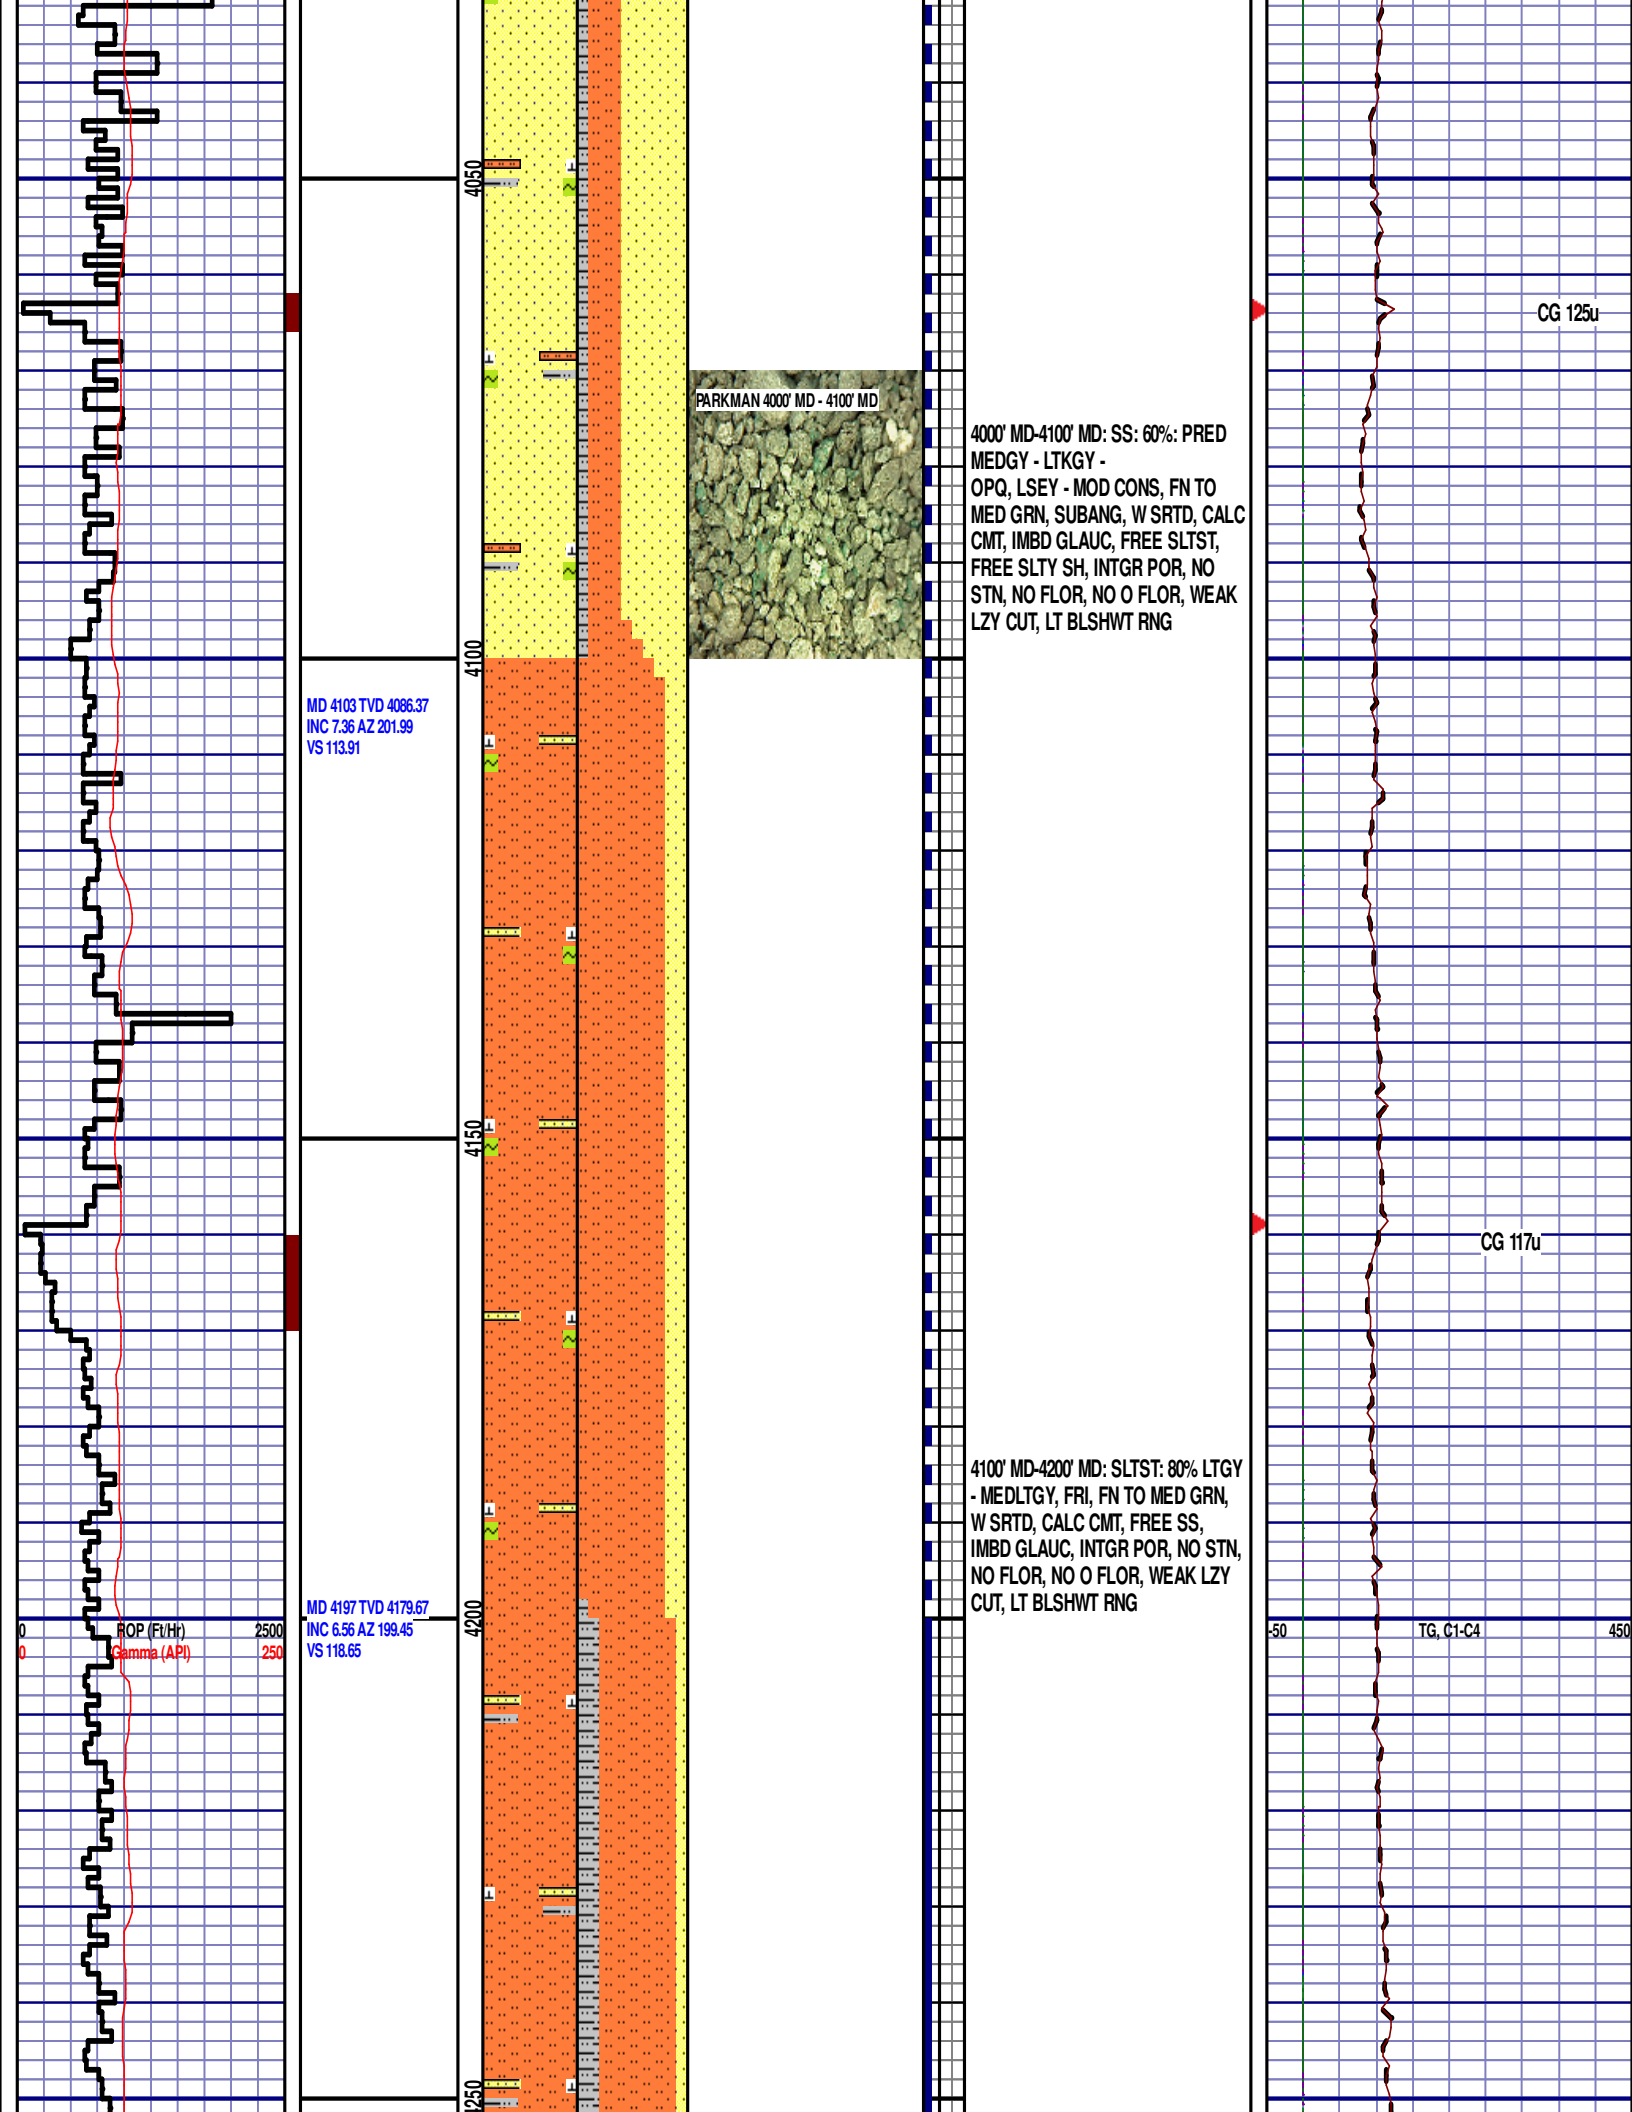

4200' MD-4300' MD: SLTST: 70% LTGY
- MEDLTGY, FRI, FN TO MED GRN,
W SRTD, CALC CMT, SANDY, FREE
SLTY SH, INTGR POR, NO STN, NO
FLOR, WEAK LZY CUT, NO CUT, NO
RNG


MD 4292 TVD 4274.08
INC 6.29 AZ 202.65
VS 123.11

SUSSEX 4303' MD 4285' TVD

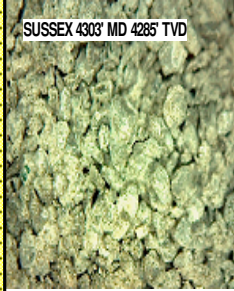**SUSSEX**

4303' MD 4285' TVD

SUSSEX 4300' MD - 4400' MD

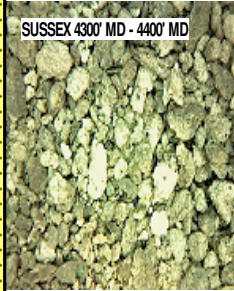

4300' MD-4400' MD: SS: 50%: PRED
MEDGY - LTKGY -
OPQ, LSEY - MOD CONS, FN TO
MED GRN, SUBANG, W SRTD, CALC
CMT, IMBD GLAUC, FREE SLTST,
FREE SLTY SH, INTGR POR, NO
STN, NO FLOR, NO O FLOR, WEAK
LZY CUT, LT BLSHWT RNG

MD 4387 TVD 4368.57
INC 5.59 AZ 202.92
VS 127.51


ROP (Ft/Hr)
Gamma (API)


2500
250


-50

TG, C1-C4

450

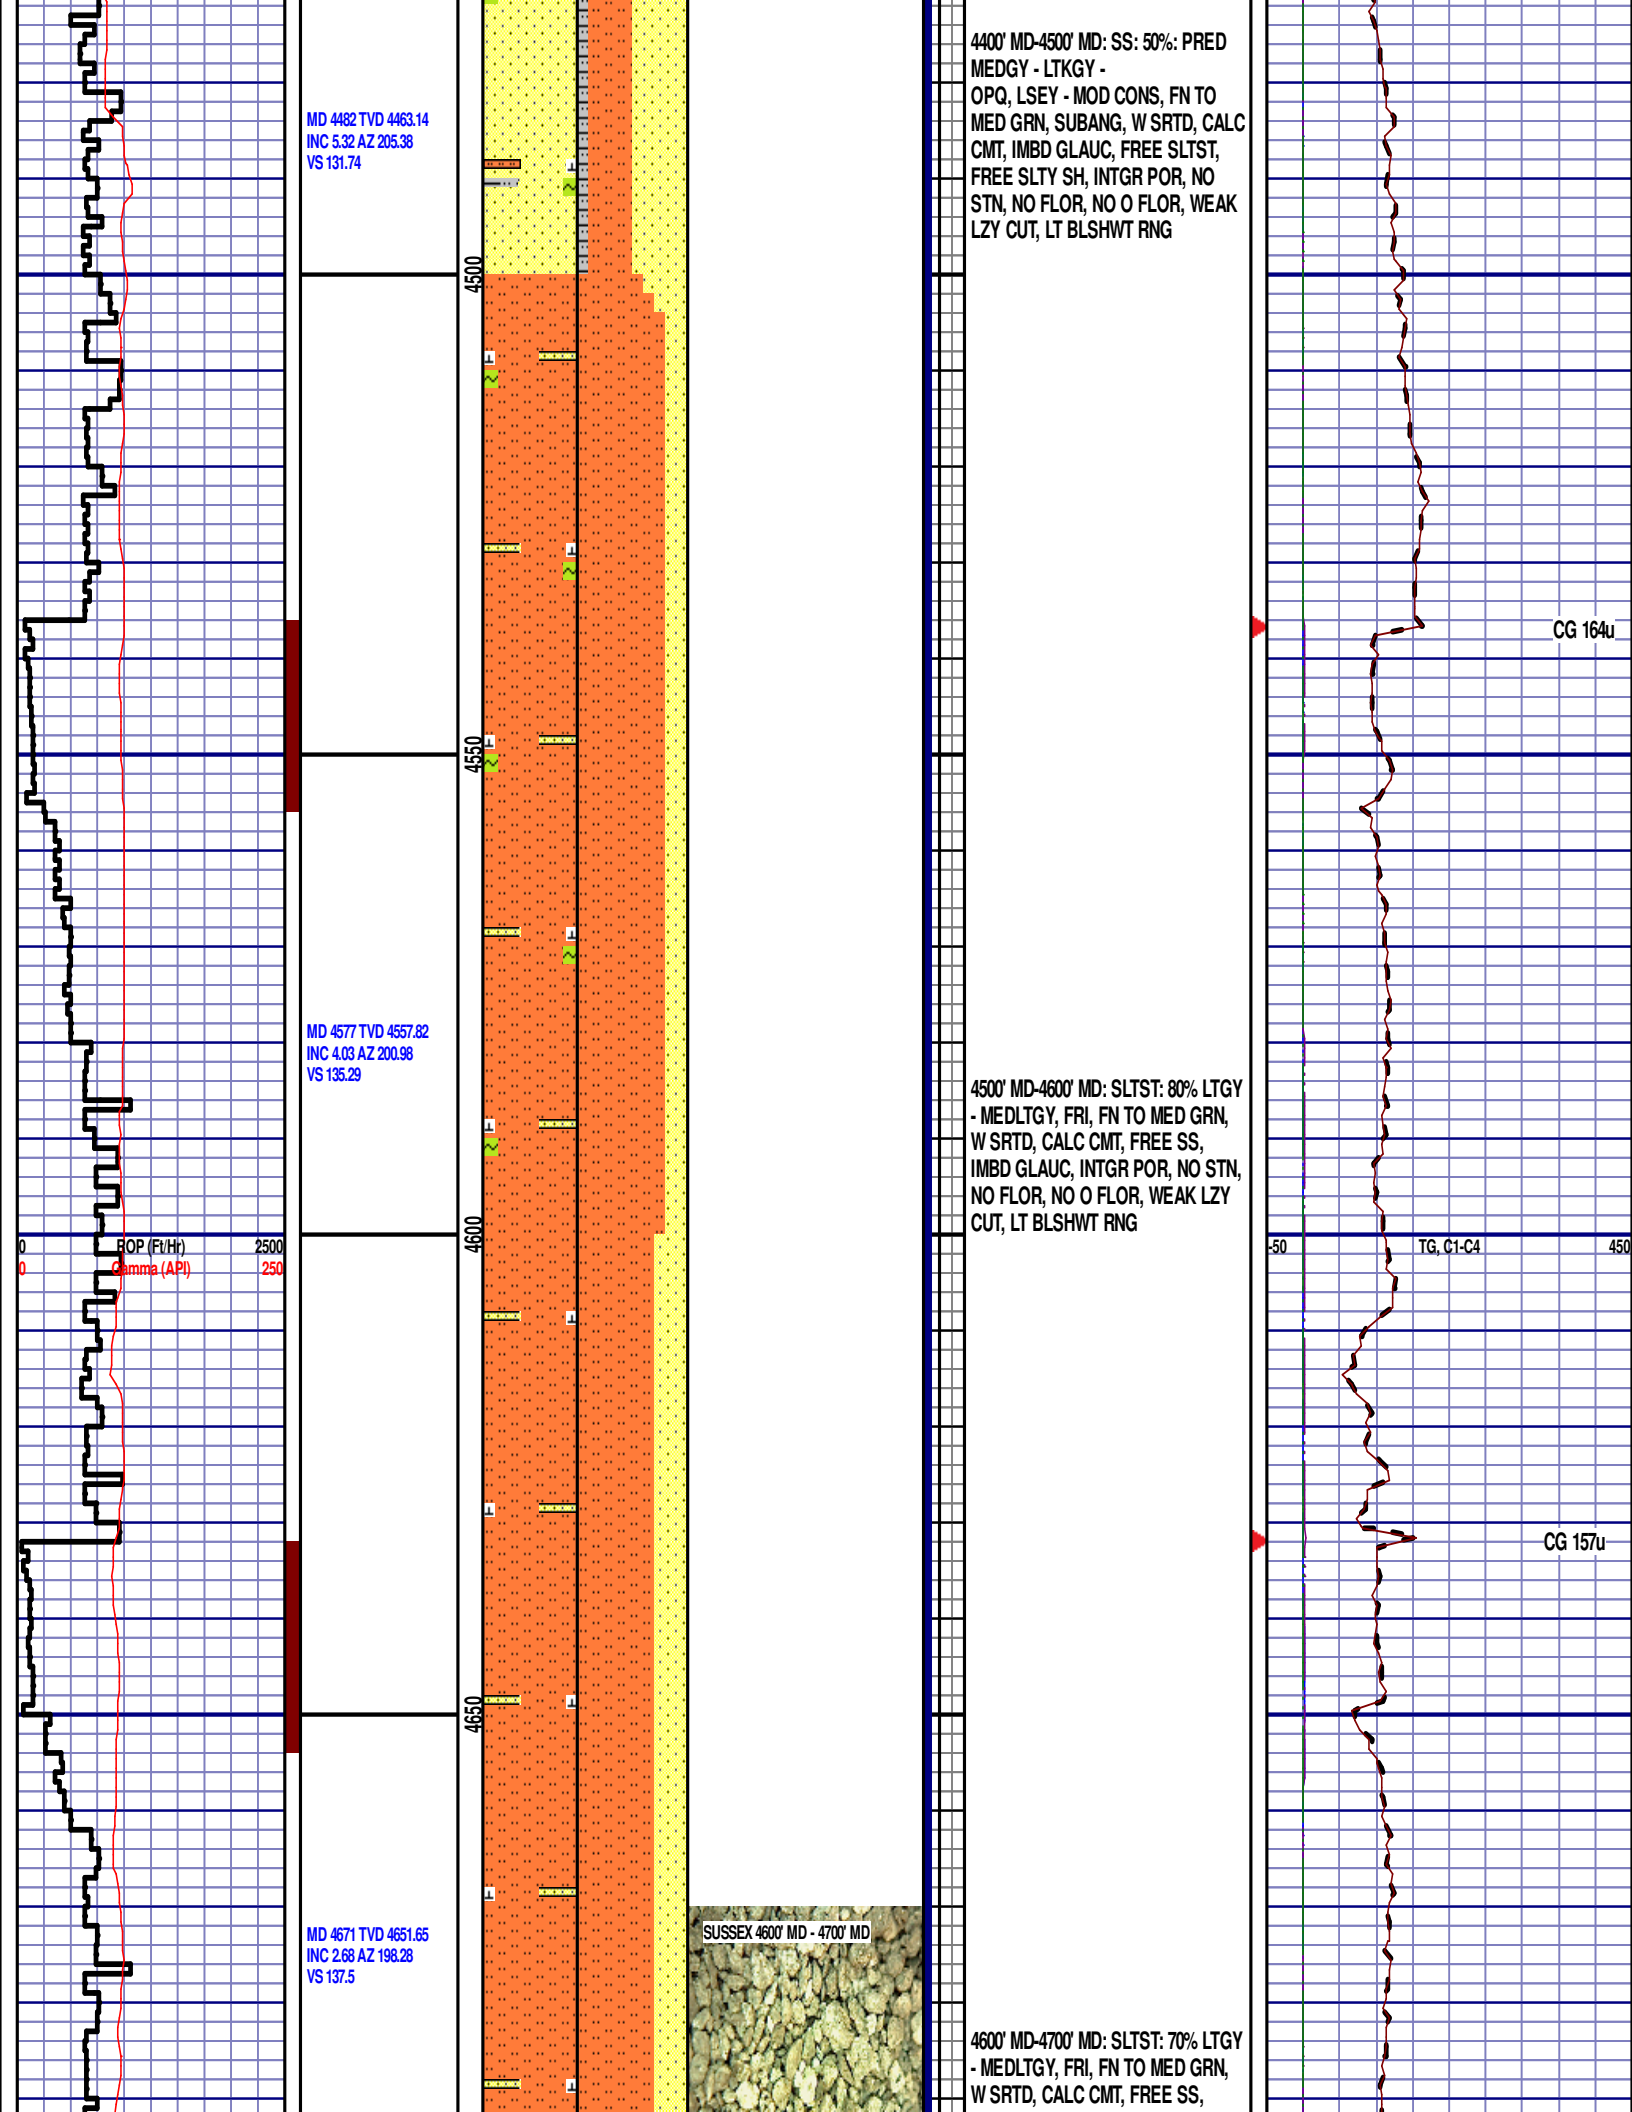

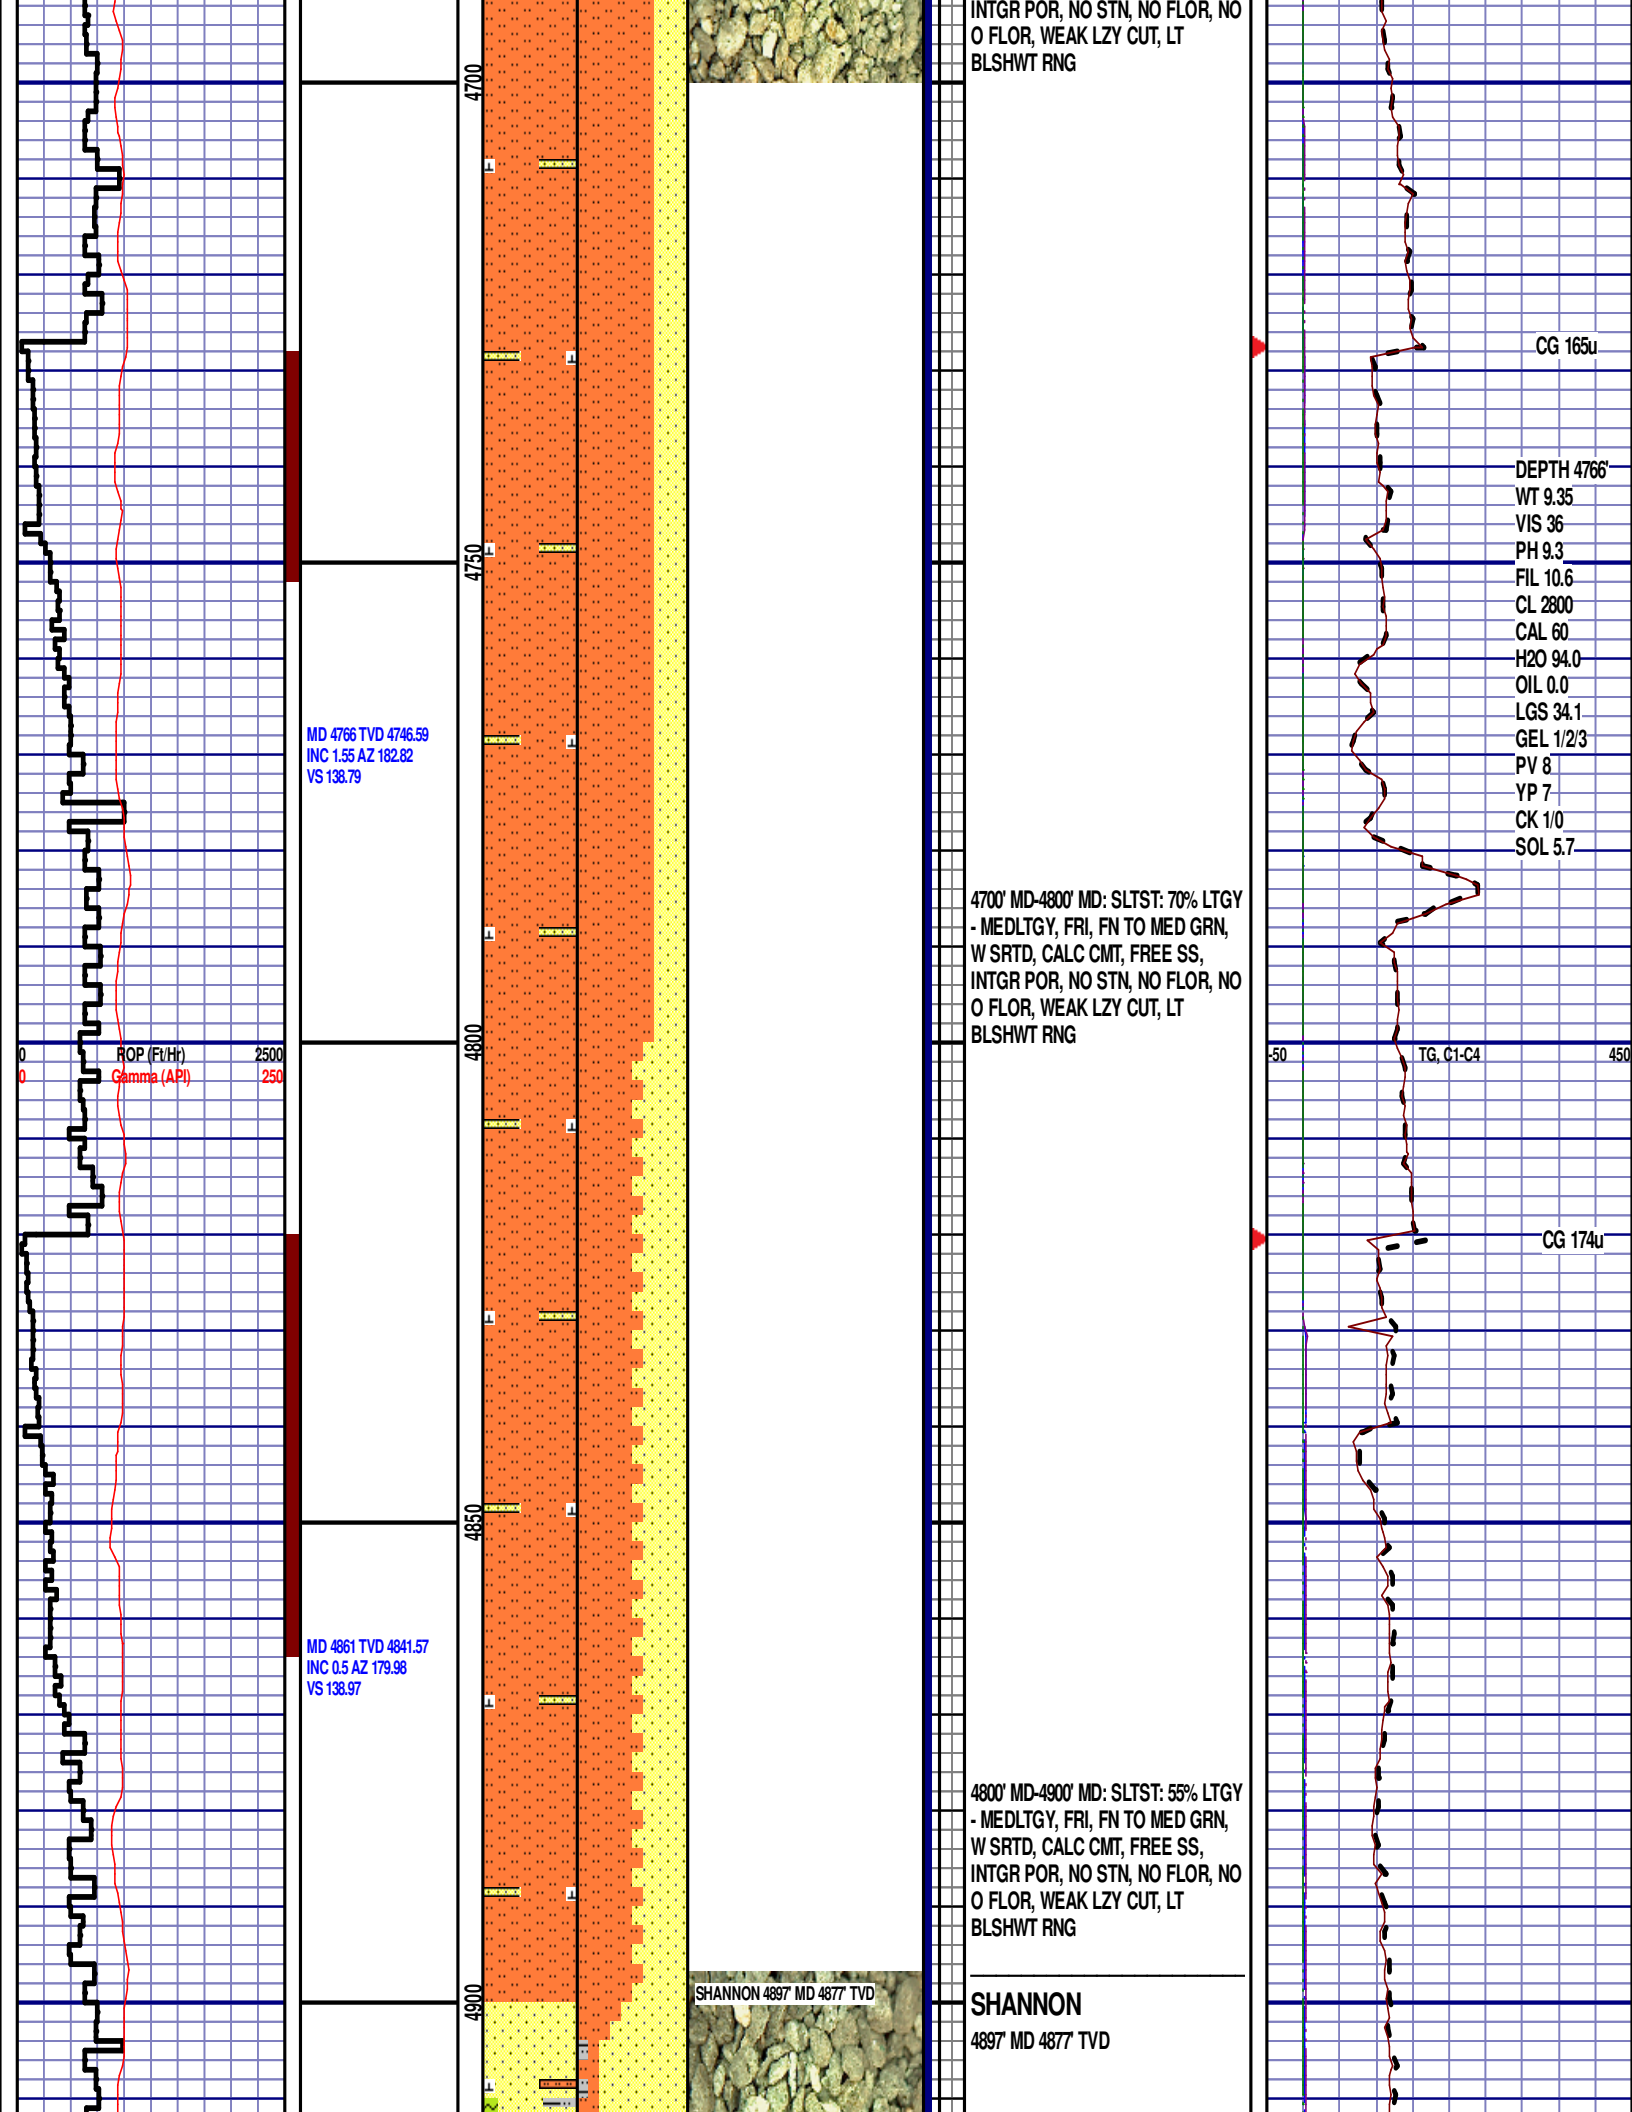

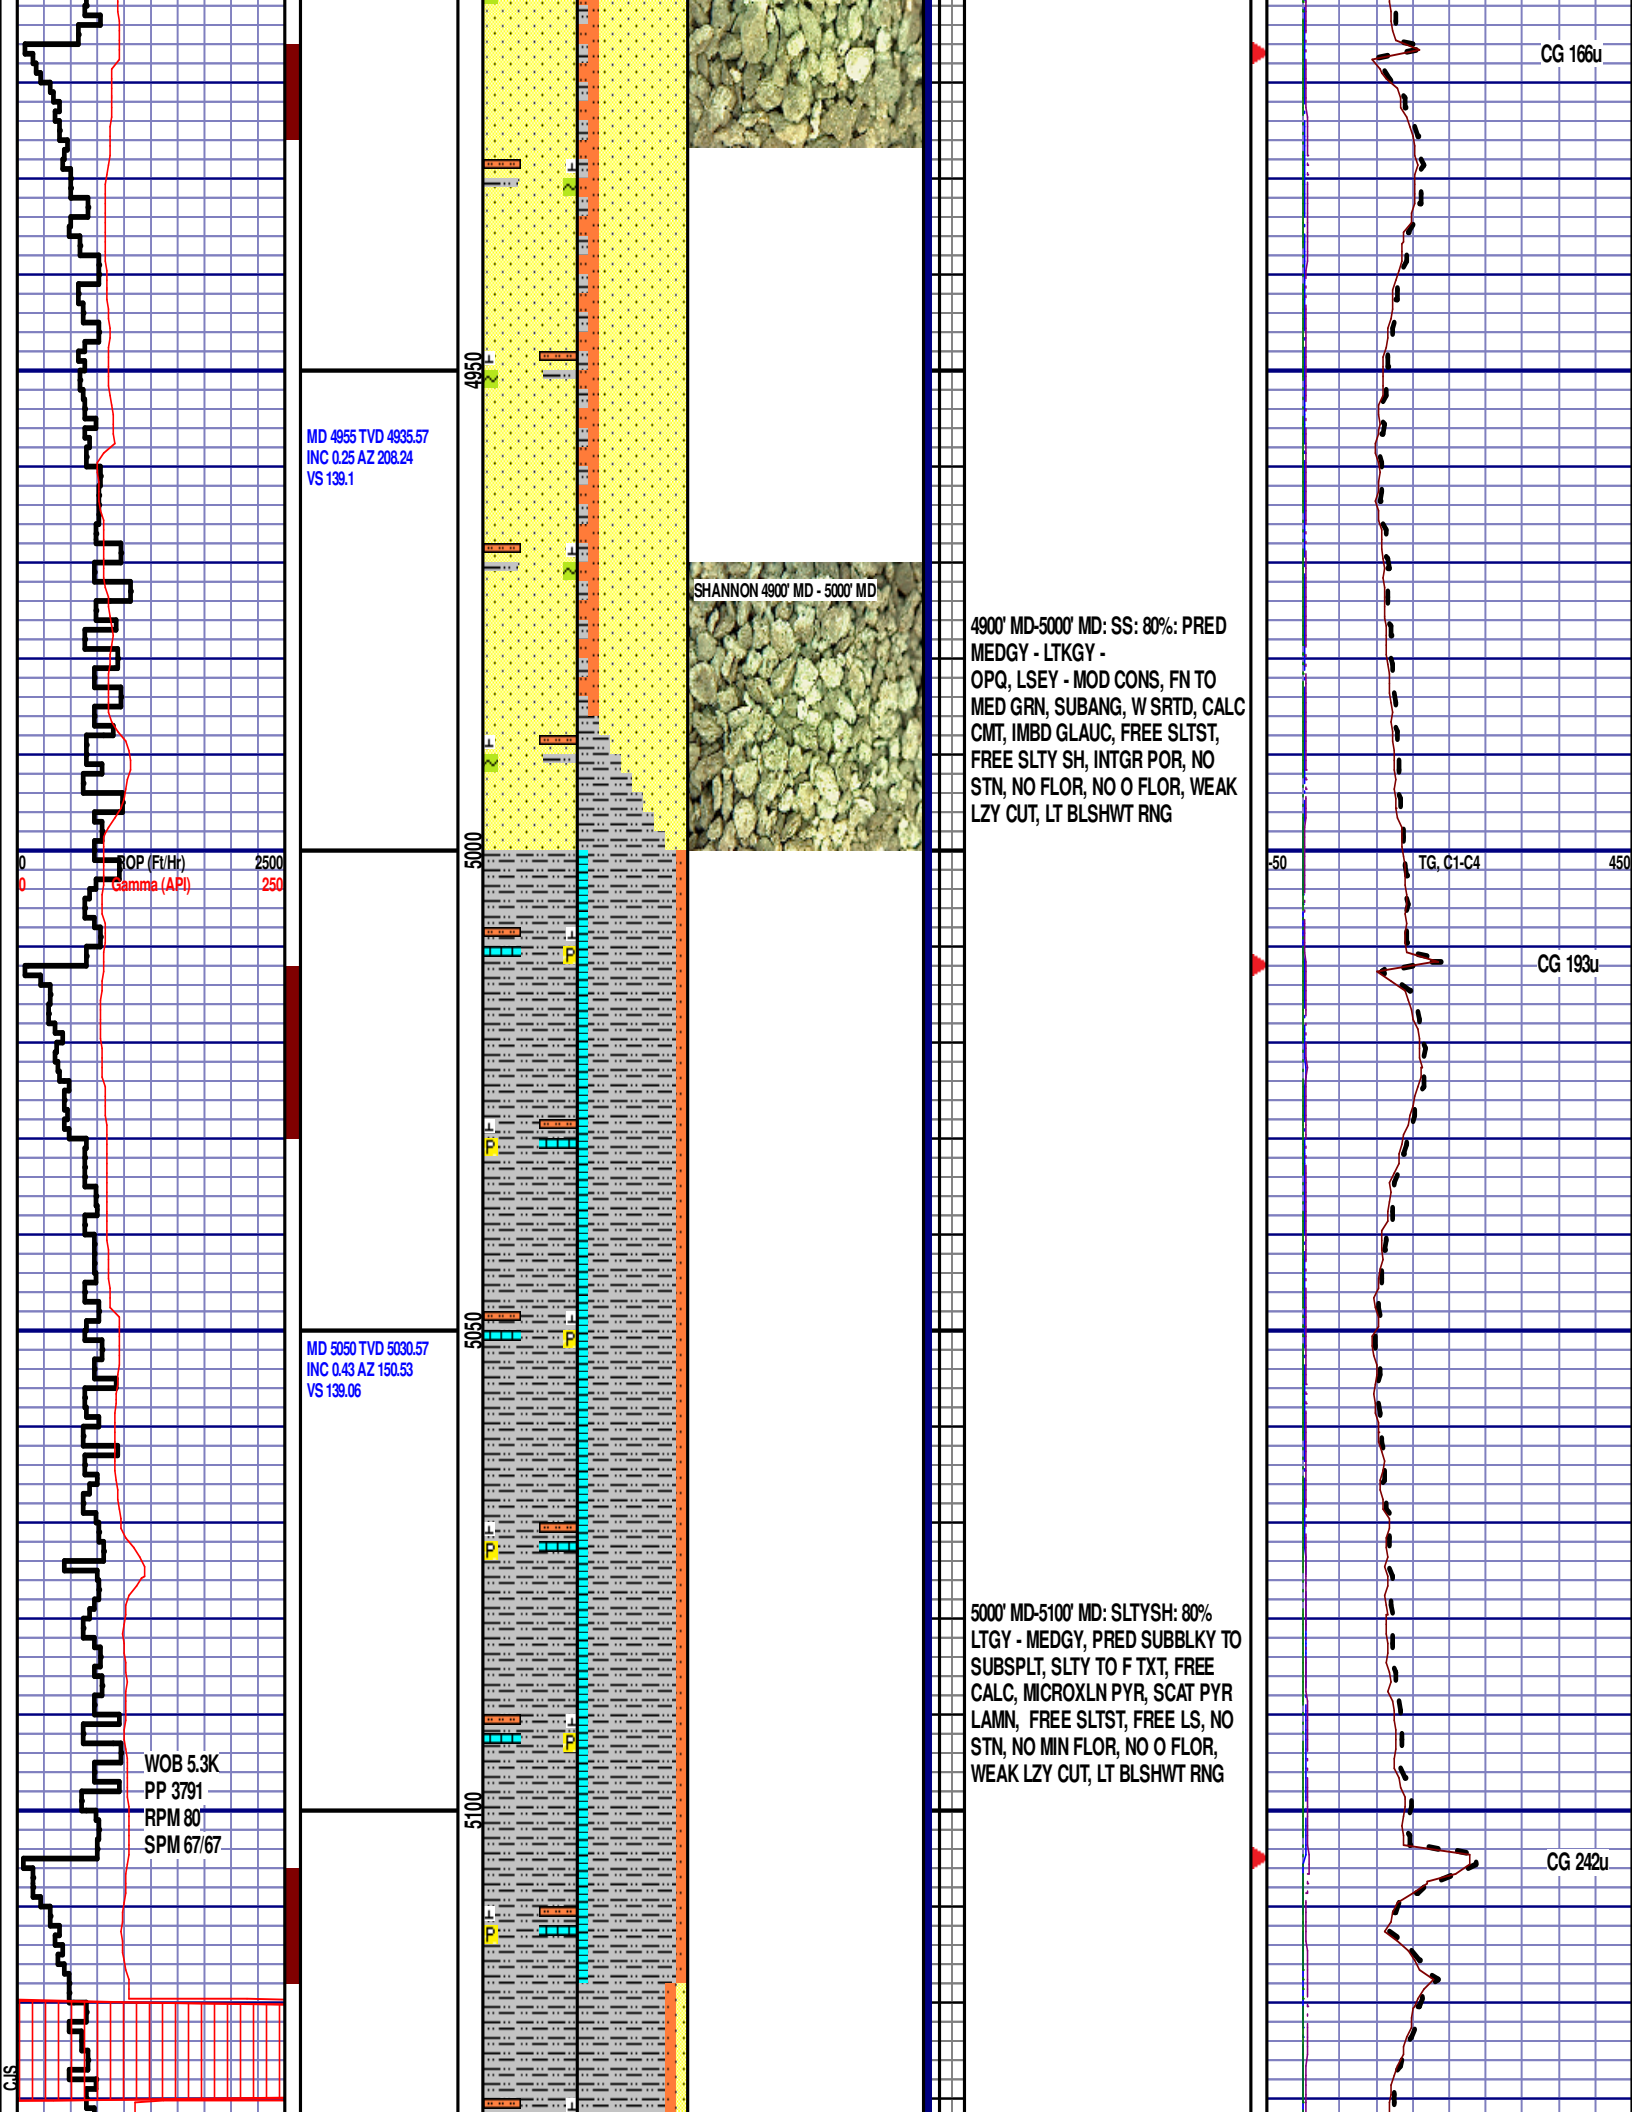

MD 5145 TVD 5125.57
INC 0.43 AZ 214.75
VS 139.13

ROP (Ft/Hr)
Gamma (API)

2500
250

MD 5240 TVD 5220.56
INC 0.41 AZ 234.08
VS 139.64

SHANNON 5200' MD - 5300' MD



5100' MD-5200' MD: SLTYSH: 80%
LTGY - MEDGY, PRED SUBBLKY TO
SUBSPLT, SLTY TO F TXT, FREE
CALC, MICROXLN PYR, SCAT PYR
LAMN, FREE SLTST, FREE SS, NO
STN, NO MIN FLOR, NO O FLOR,
WEAK LZY CUT, LT BLSHWT RNG

5200' MD-5300' MD: SLTYSH: 80%
LTGY - MEDGY, PRED SUBBLKY TO
SUBSPLT, SLTY TO F TXT, FREE
CALC, MICROXLN PYR, SCAT PYR
LAMN, FREE SLTST, FREE SS, NO
STN, NO MIN FLOR, NO O FLOR,
WEAK LZY CUT, LT BLSHWT RNG

CG 173u 450

CG 229u

