




[illegible]

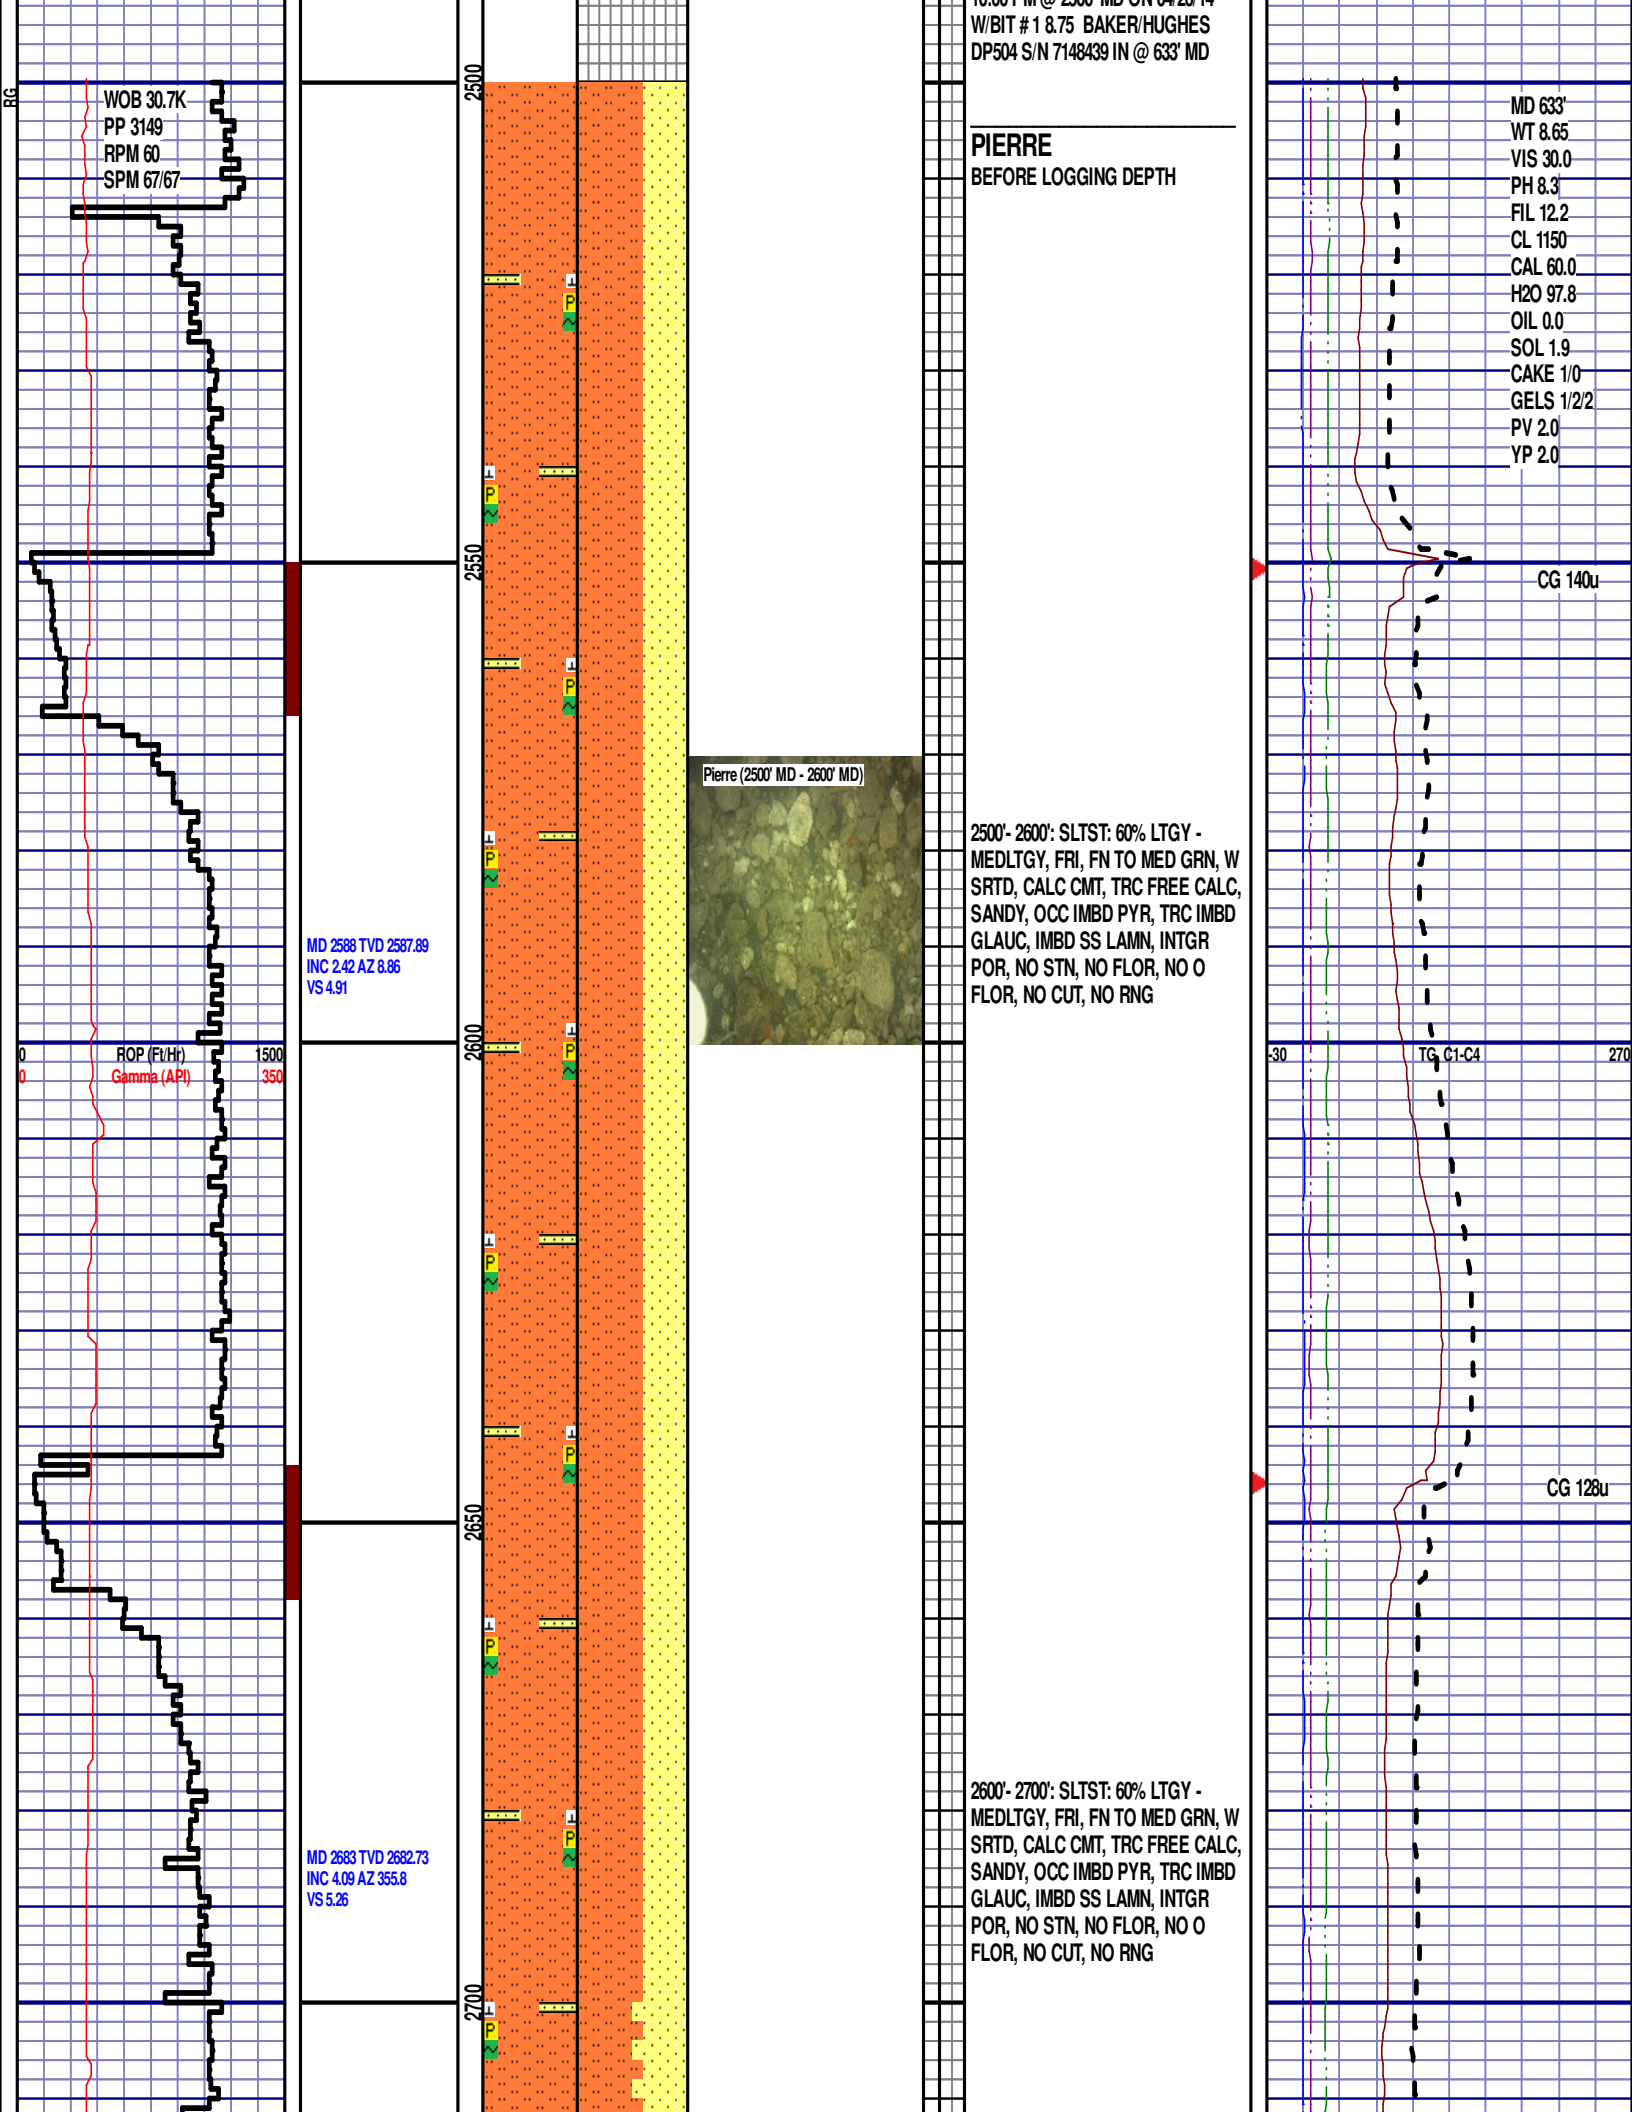

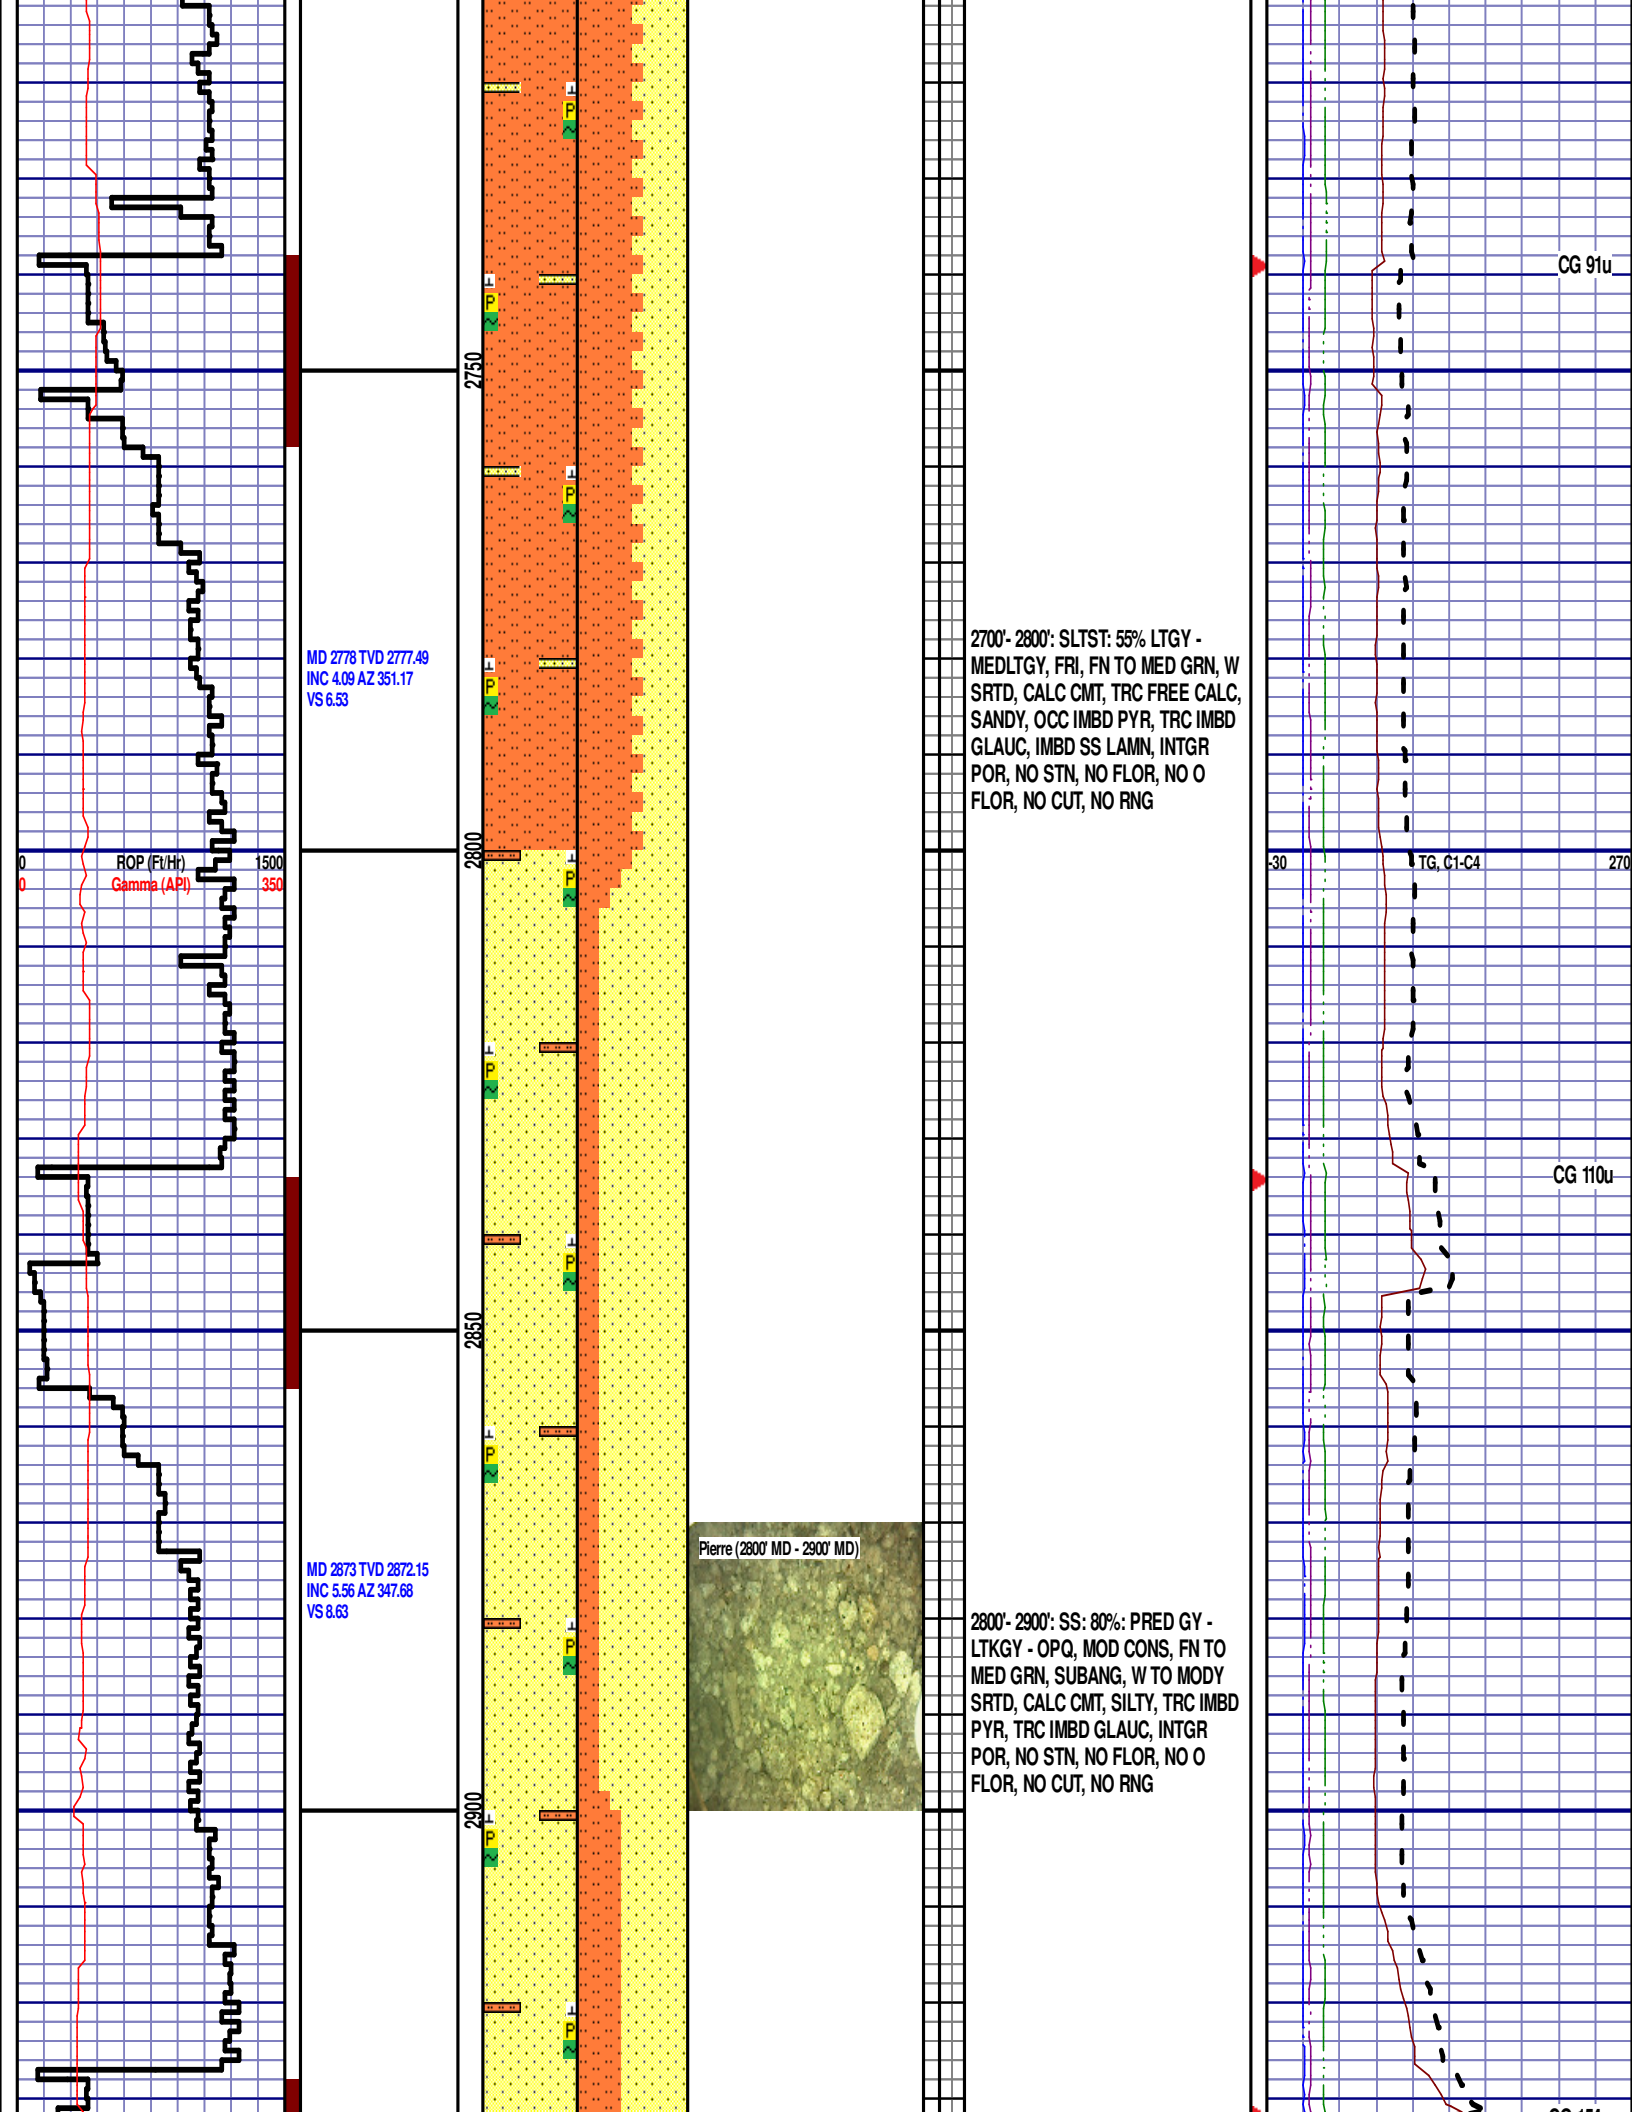


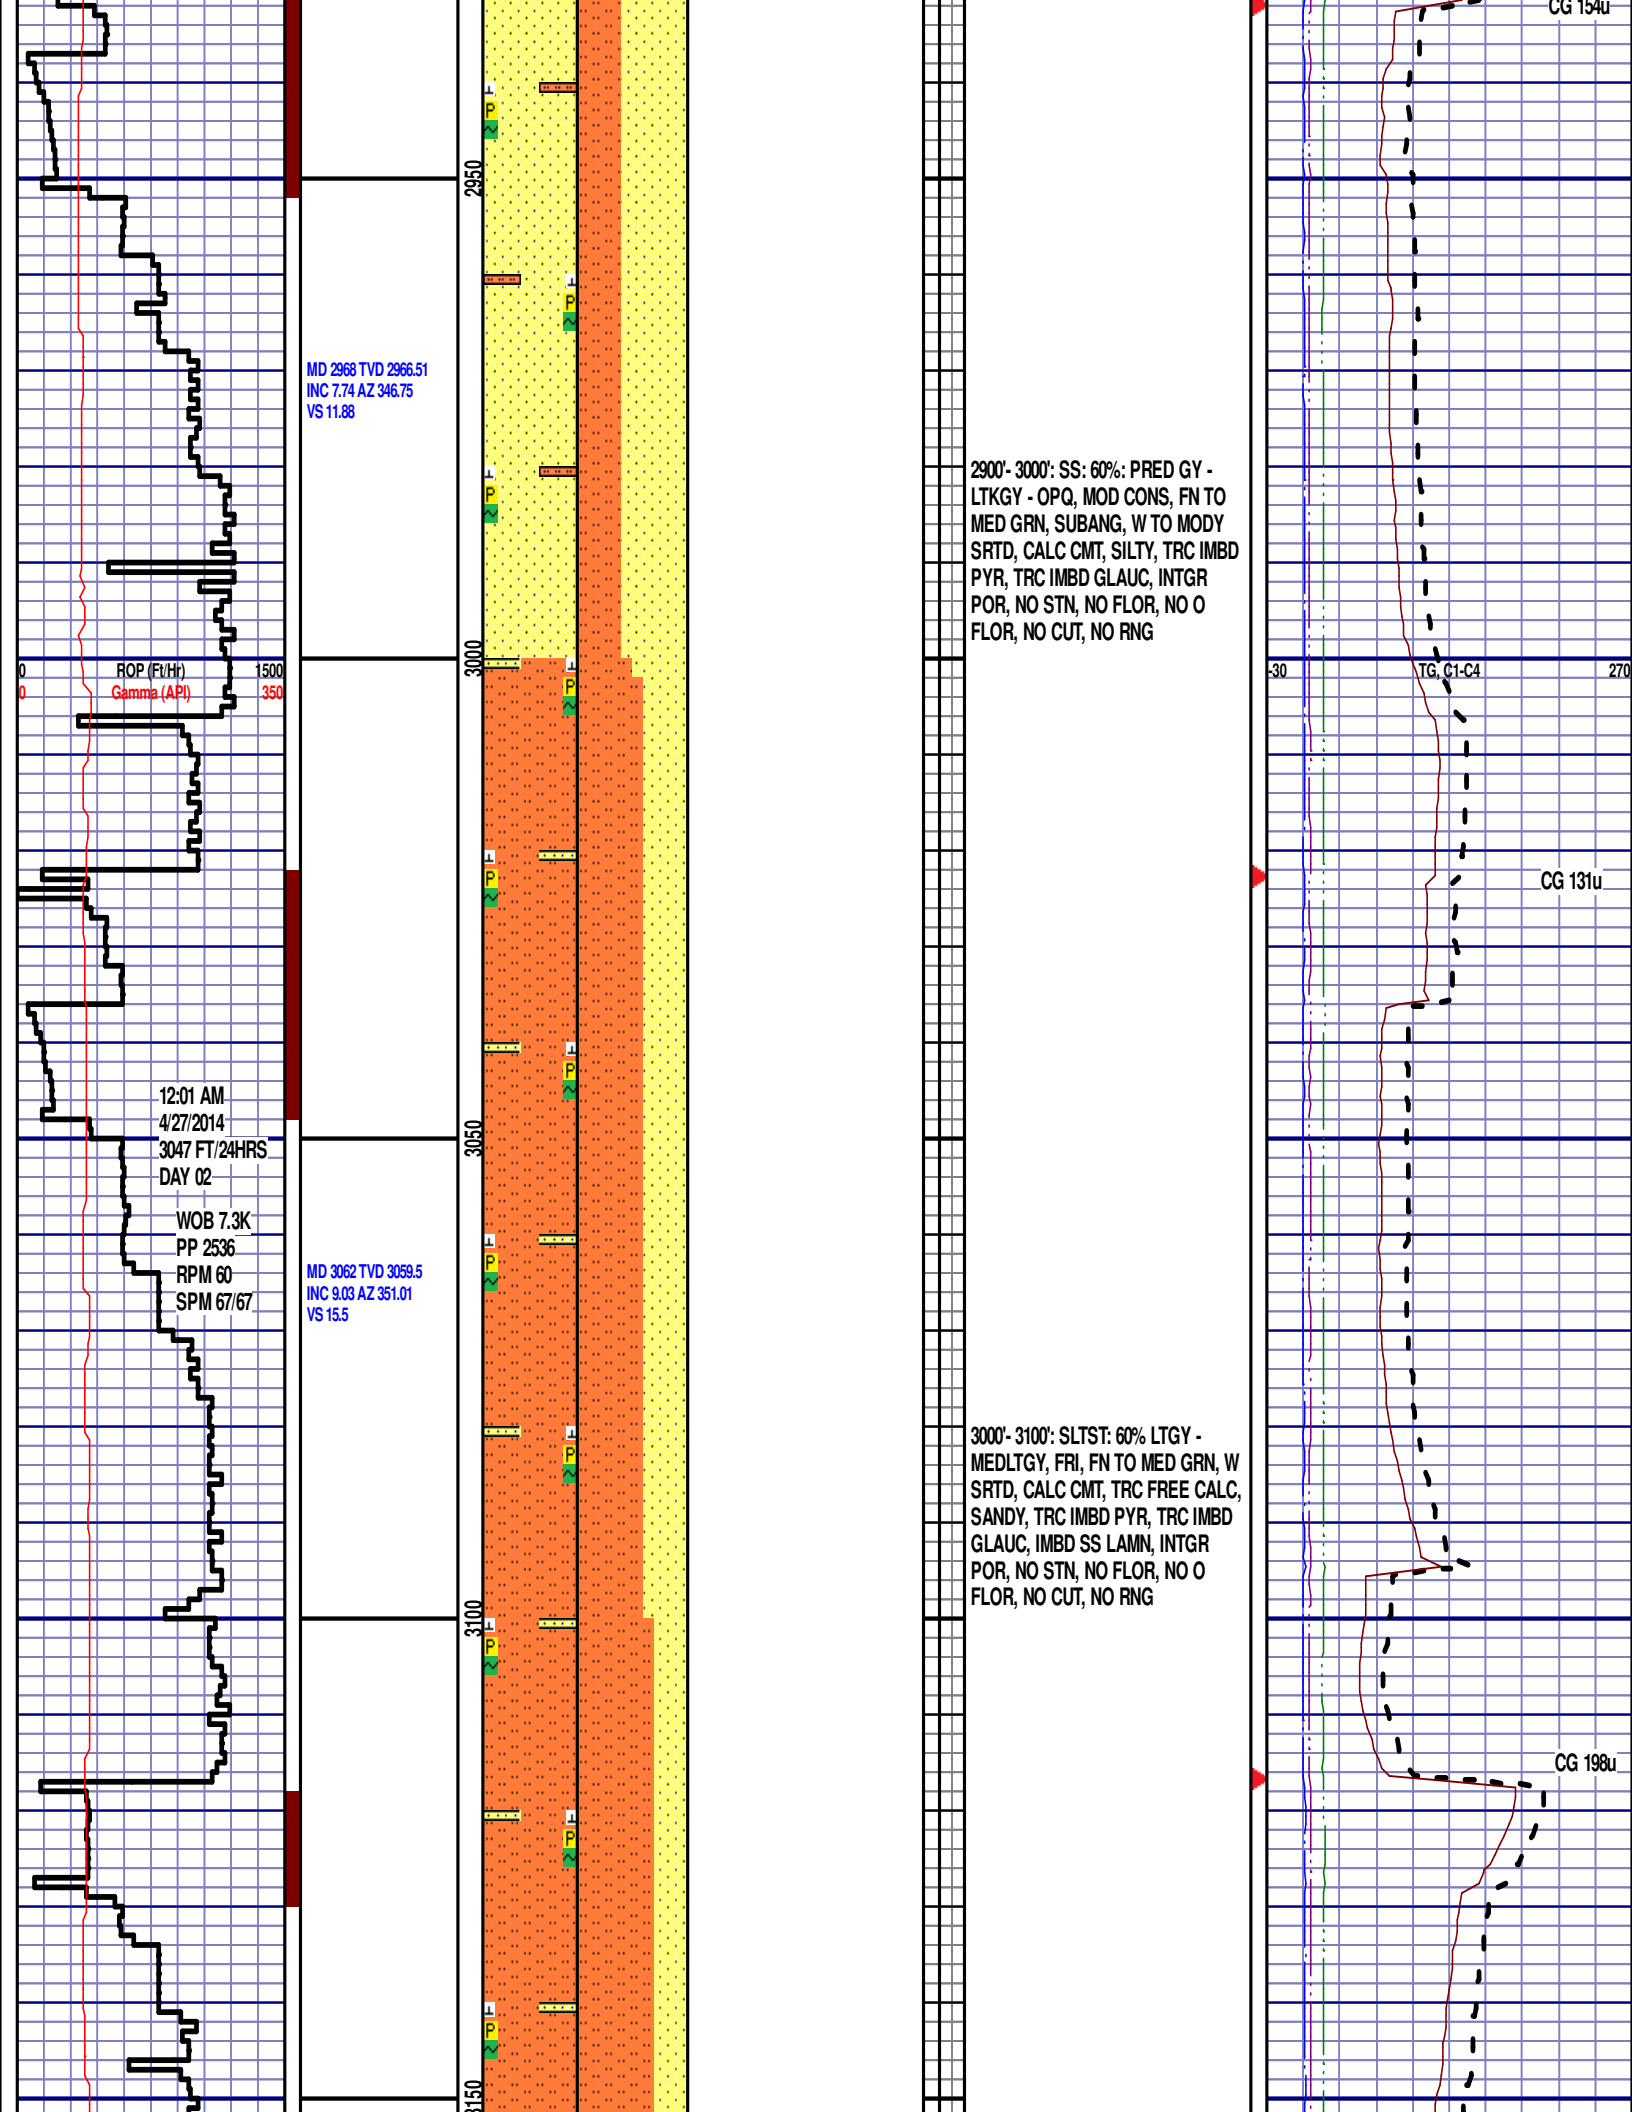

MD 3157 TVD 3153.44
INC 8.08 AZ 351.2
VS 18.74

MD 3252 TVD 3247.45
INC 8.51 AZ 349.02
VS 22.12

MD 3347 TVD 3341.37
INC 8.75 AZ 355.43
VS 25.11

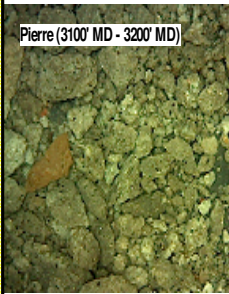

3100'- 3200': SLTST: 70% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, TRC FREE CALC,
SANDY, TRC IMBD PYR, TRC IMBD
GLAUC, IMBD SS LAMN, INTGR
POR, NO STN, NO FLOR, NO O
FLOR, NO CUT, NO RNG

3200'- 3300': SLTST: 80% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, TRC FREE CALC,
SANDY, OCC IMBD PYR, TRC IMBD
GLAUC, IMBD SS LAMN, INTGR
POR, NO STN, NO FLOR, NO O
FLOR, NO CUT, NO RNG


30 TG, C1-C4 270


CG 151u

CG 217u

PASON ERROR

PASON ERROR

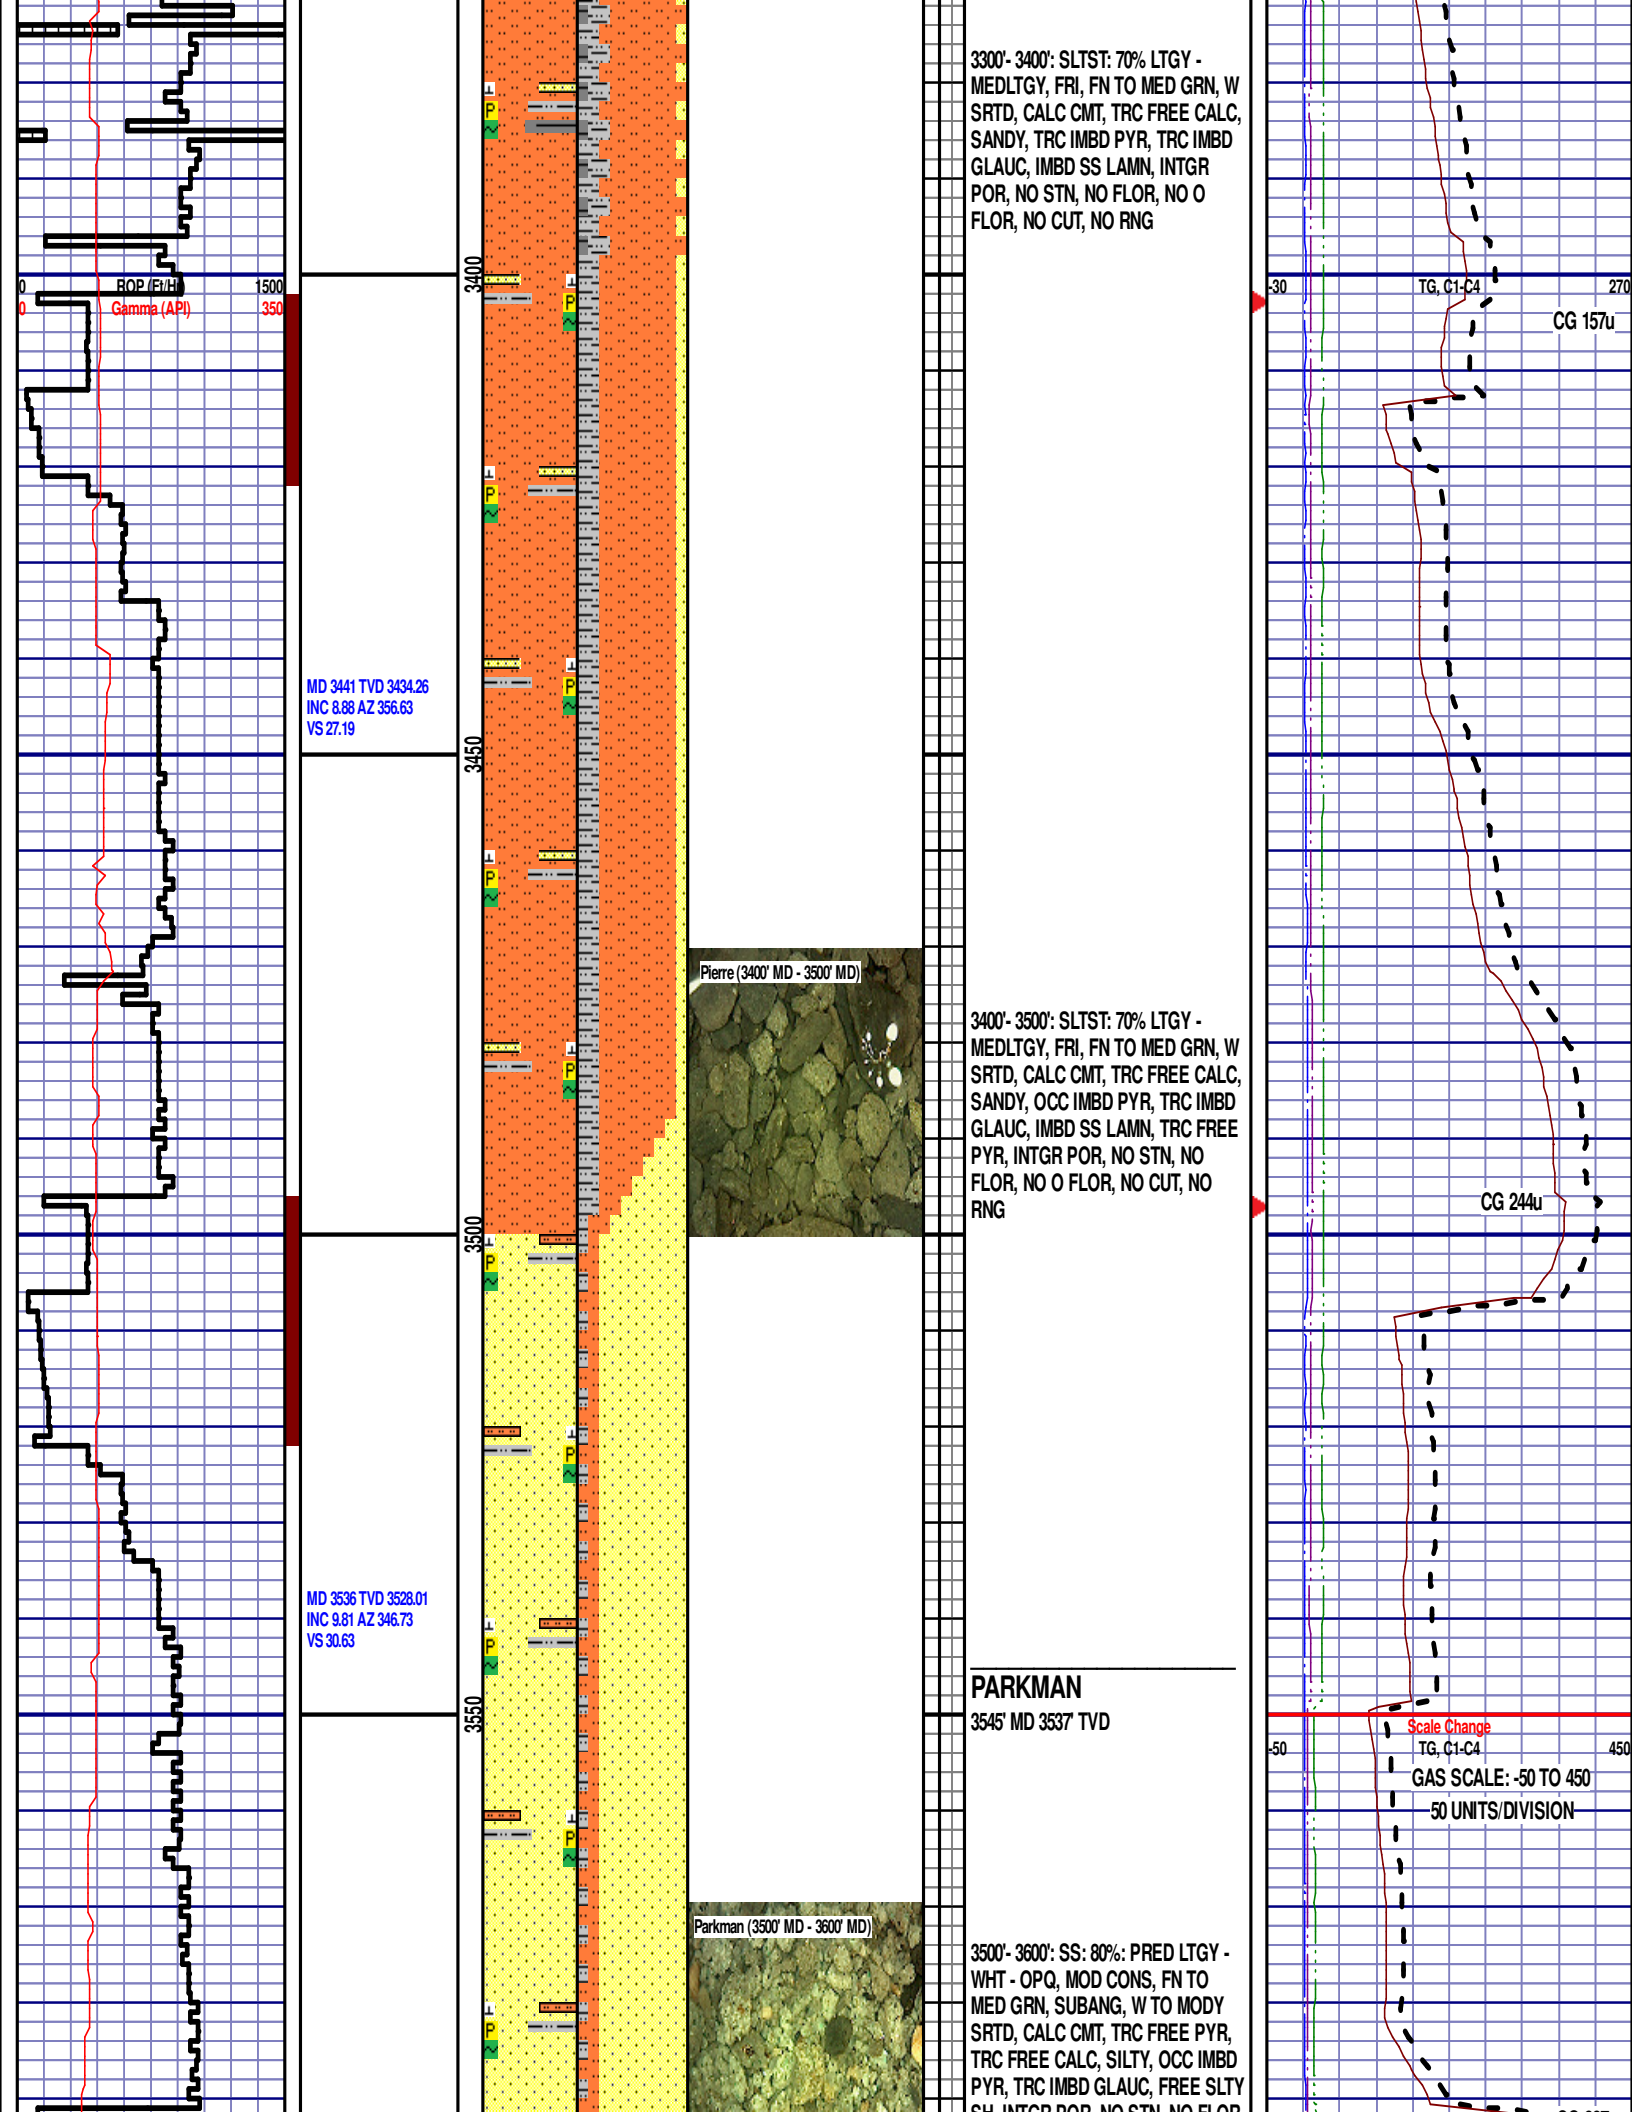

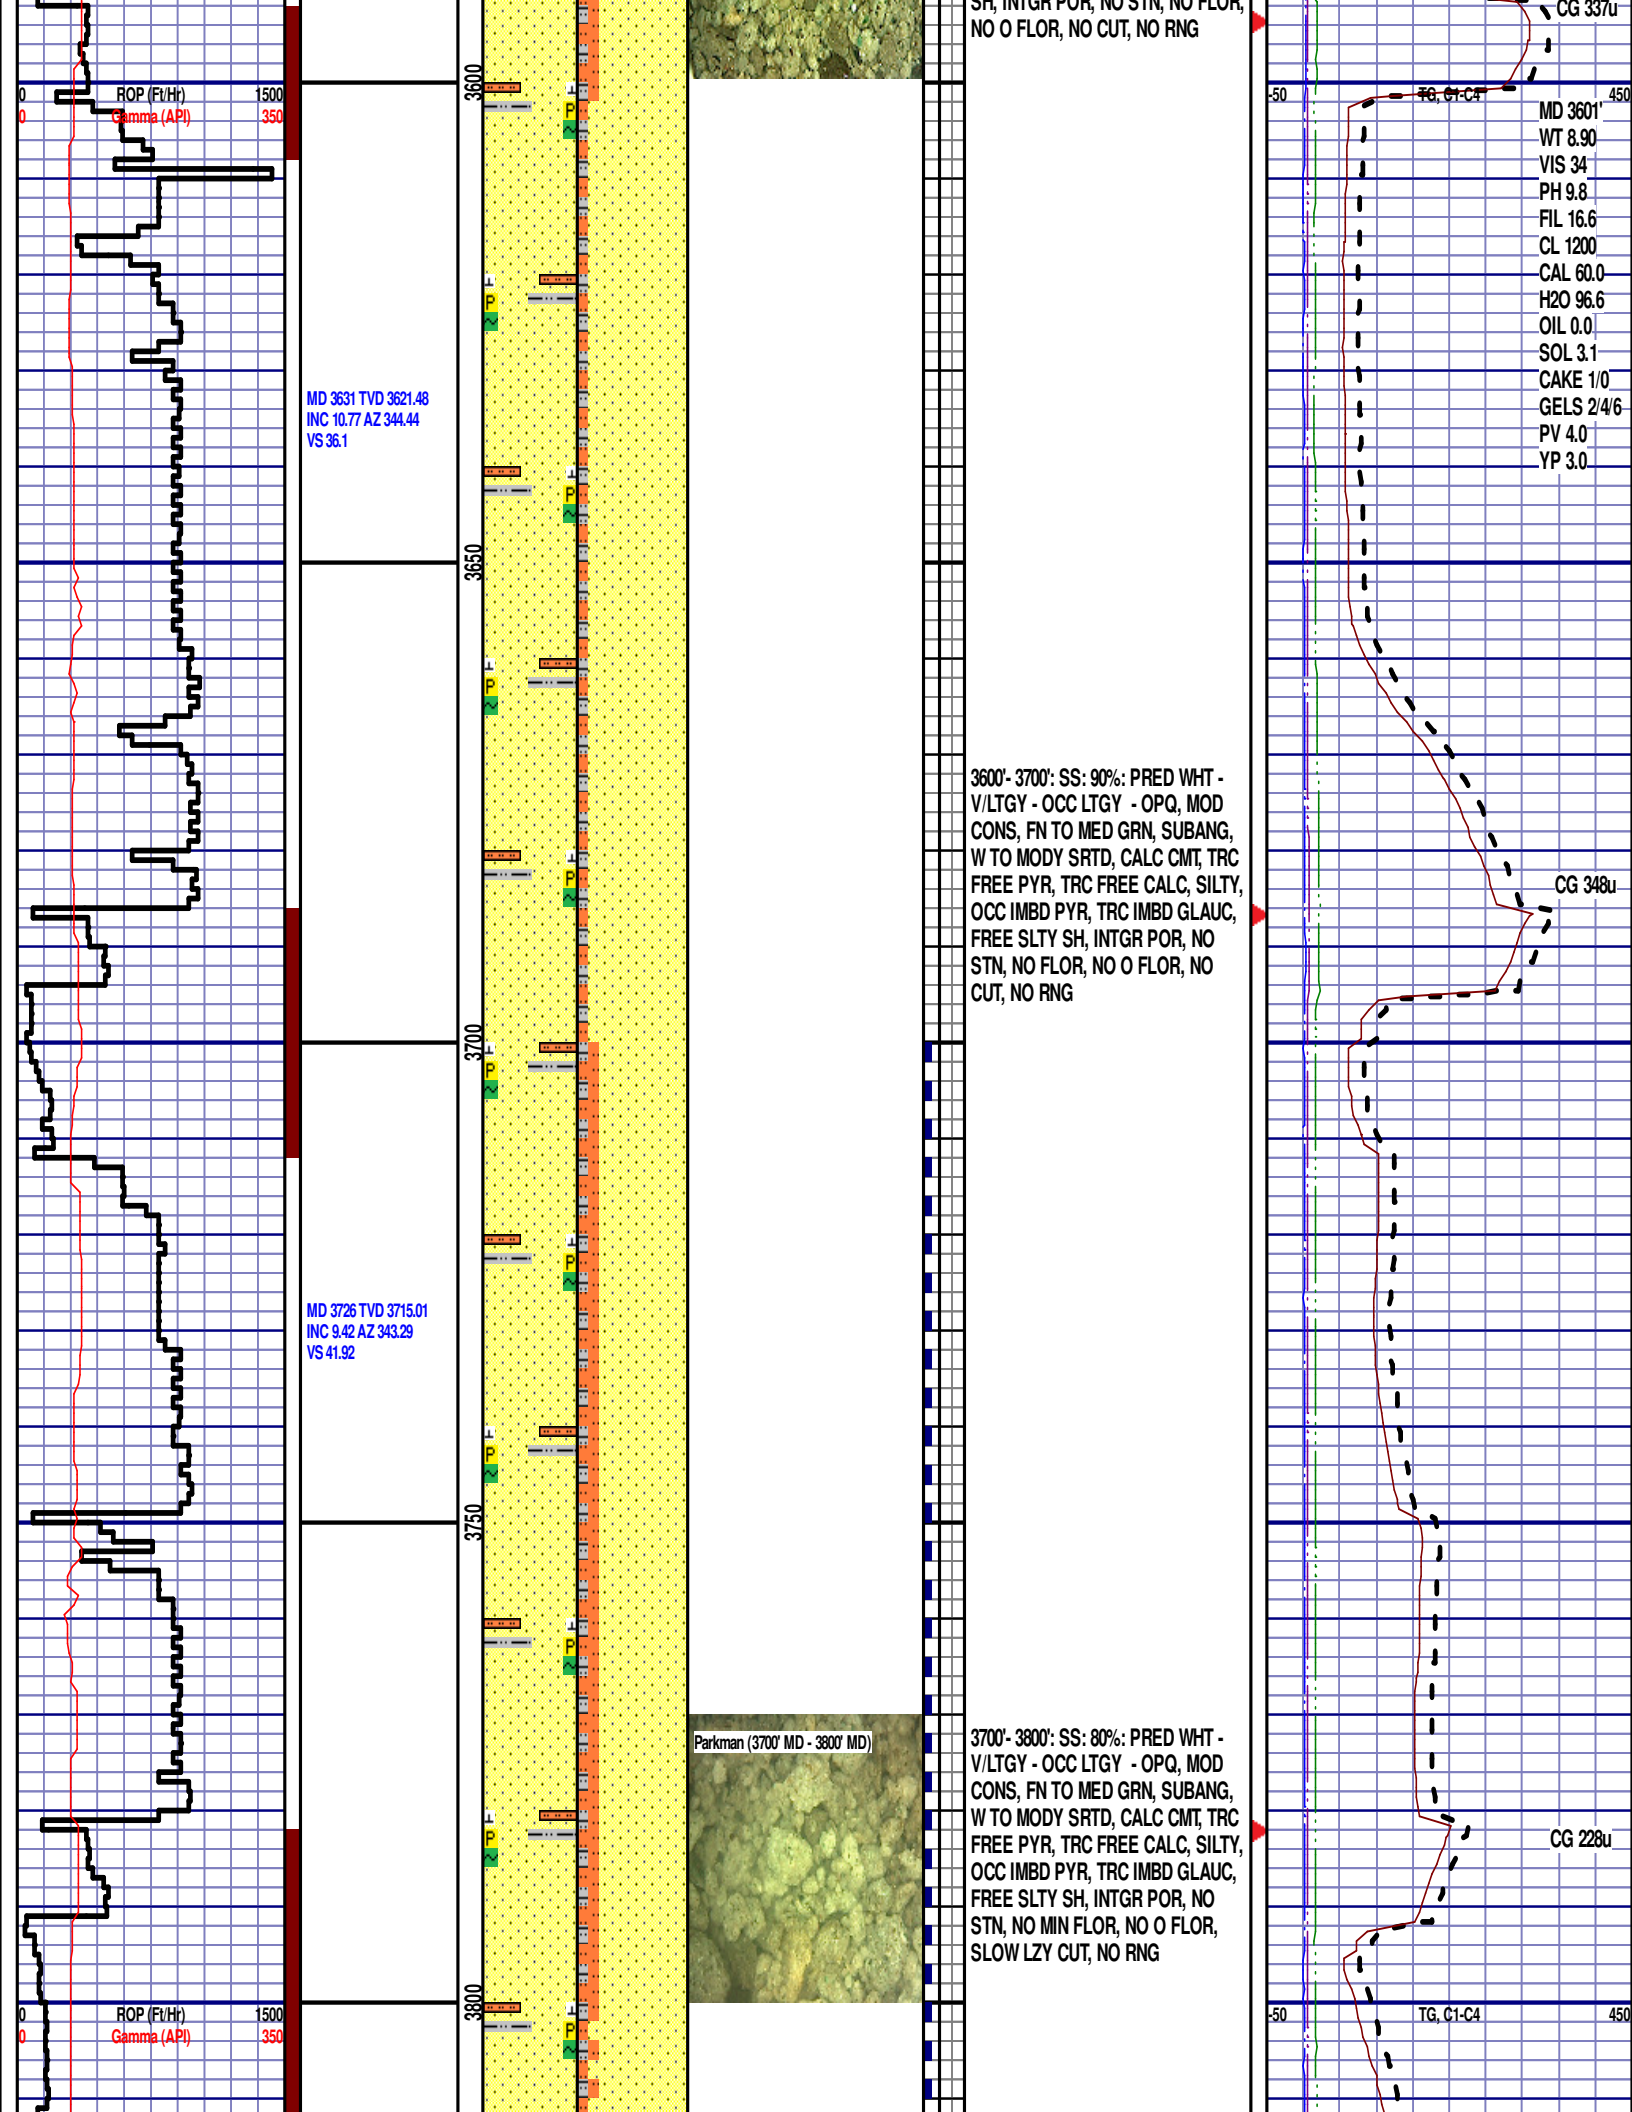

MD 3819 TVD 3807.02
INC 7.3 AZ 349.89
VS 46.14

PASON ERROR

MD 3914 TVD 3901.28
INC 7 AZ 349.23
VS 49.16

MD 4009 TVD 3995.42
INC 8.38 AZ 346.65
VS 52.77

3800'- 3900': SS: 85%: PRED V/LTGY -
WHT - OCC LTGY - OPQ, MOD
CONS, FN TO MED GRN, SUBANG,
W TO MODY SRTD, CALC CMT, TRC
FREE PYR, TRC FREE CALC, SILTY,
OCC IMBD PYR, TRC IMBD GLAUC,
FREE SLTY SH, INTGR POR, NO
STN, NO FLOR, NO O FLOR, SLOW
LZY CUT, NO RNG

3900'- 4000': SLTST: 80% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, TRC FREE CALC,
SANDY, TRC IMBD PYR, IMBD
GLAUC, FREE SLTY SH, IMBD SS
LAMN, INTGR POR, NO STN, NO
FLOR, NO O FLOR, SLOW LZY CUT,
NO RNG

PASON ERROR

CG 265u

CG 184u


POP (Ft/Hr)
Gamma (API)


1500
350

50

TG, C1-C4

450

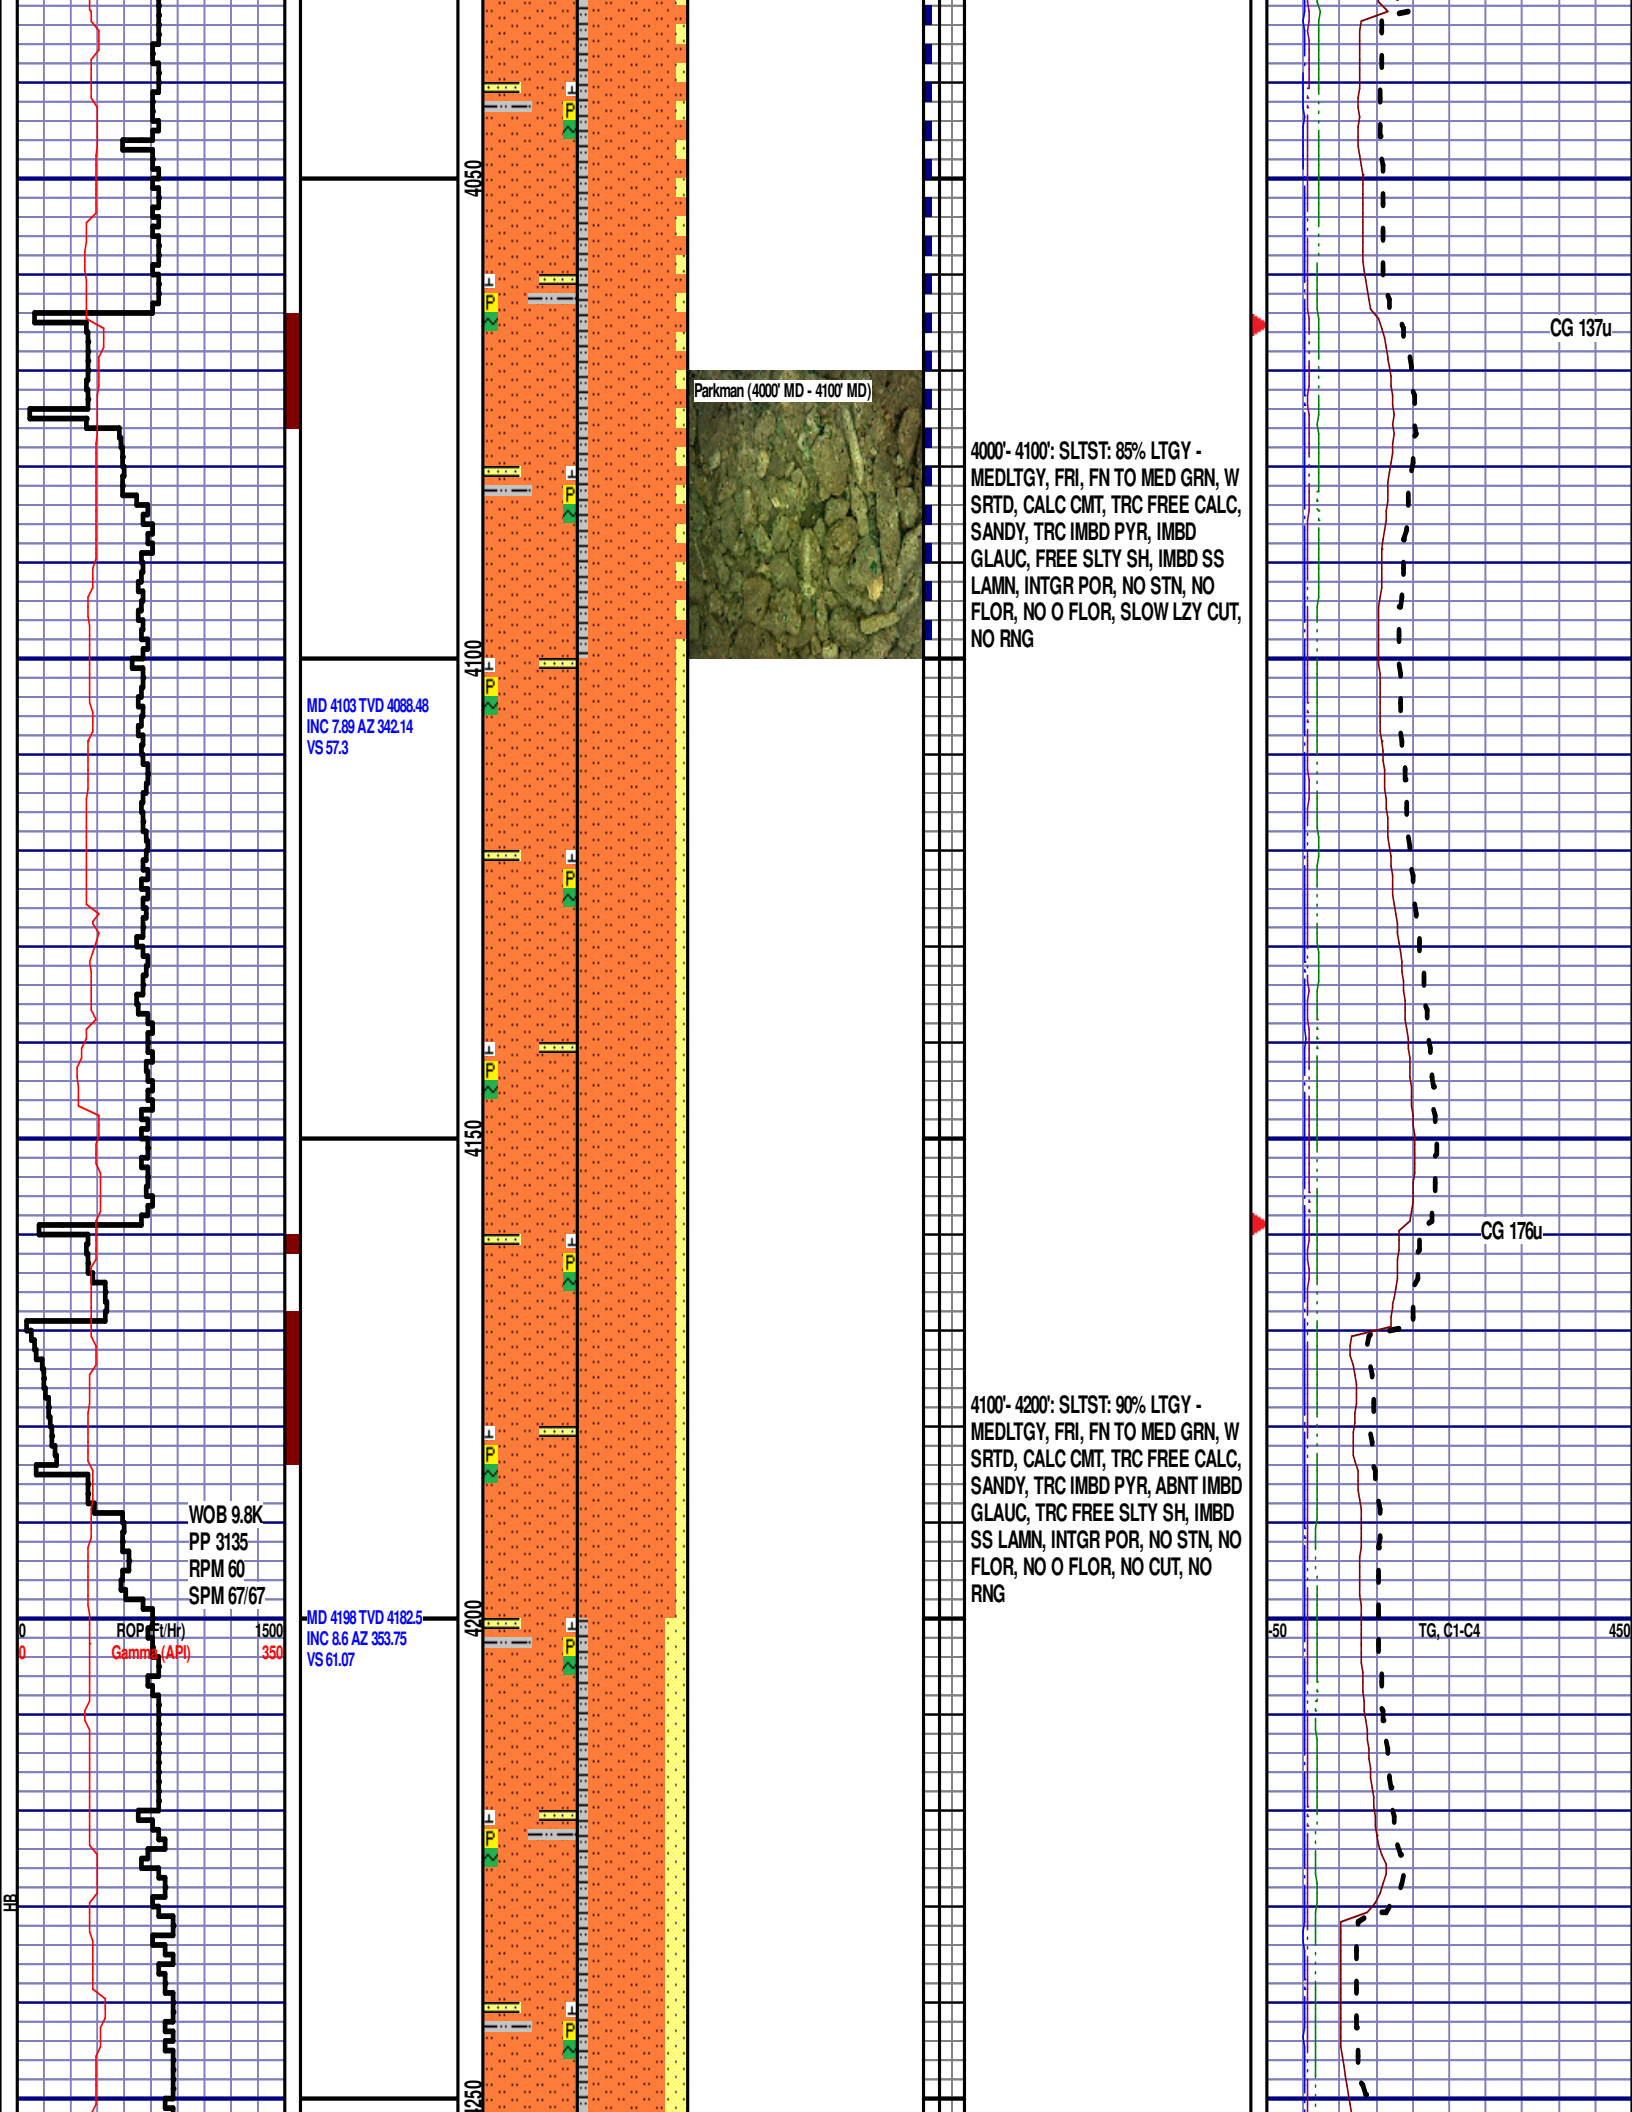

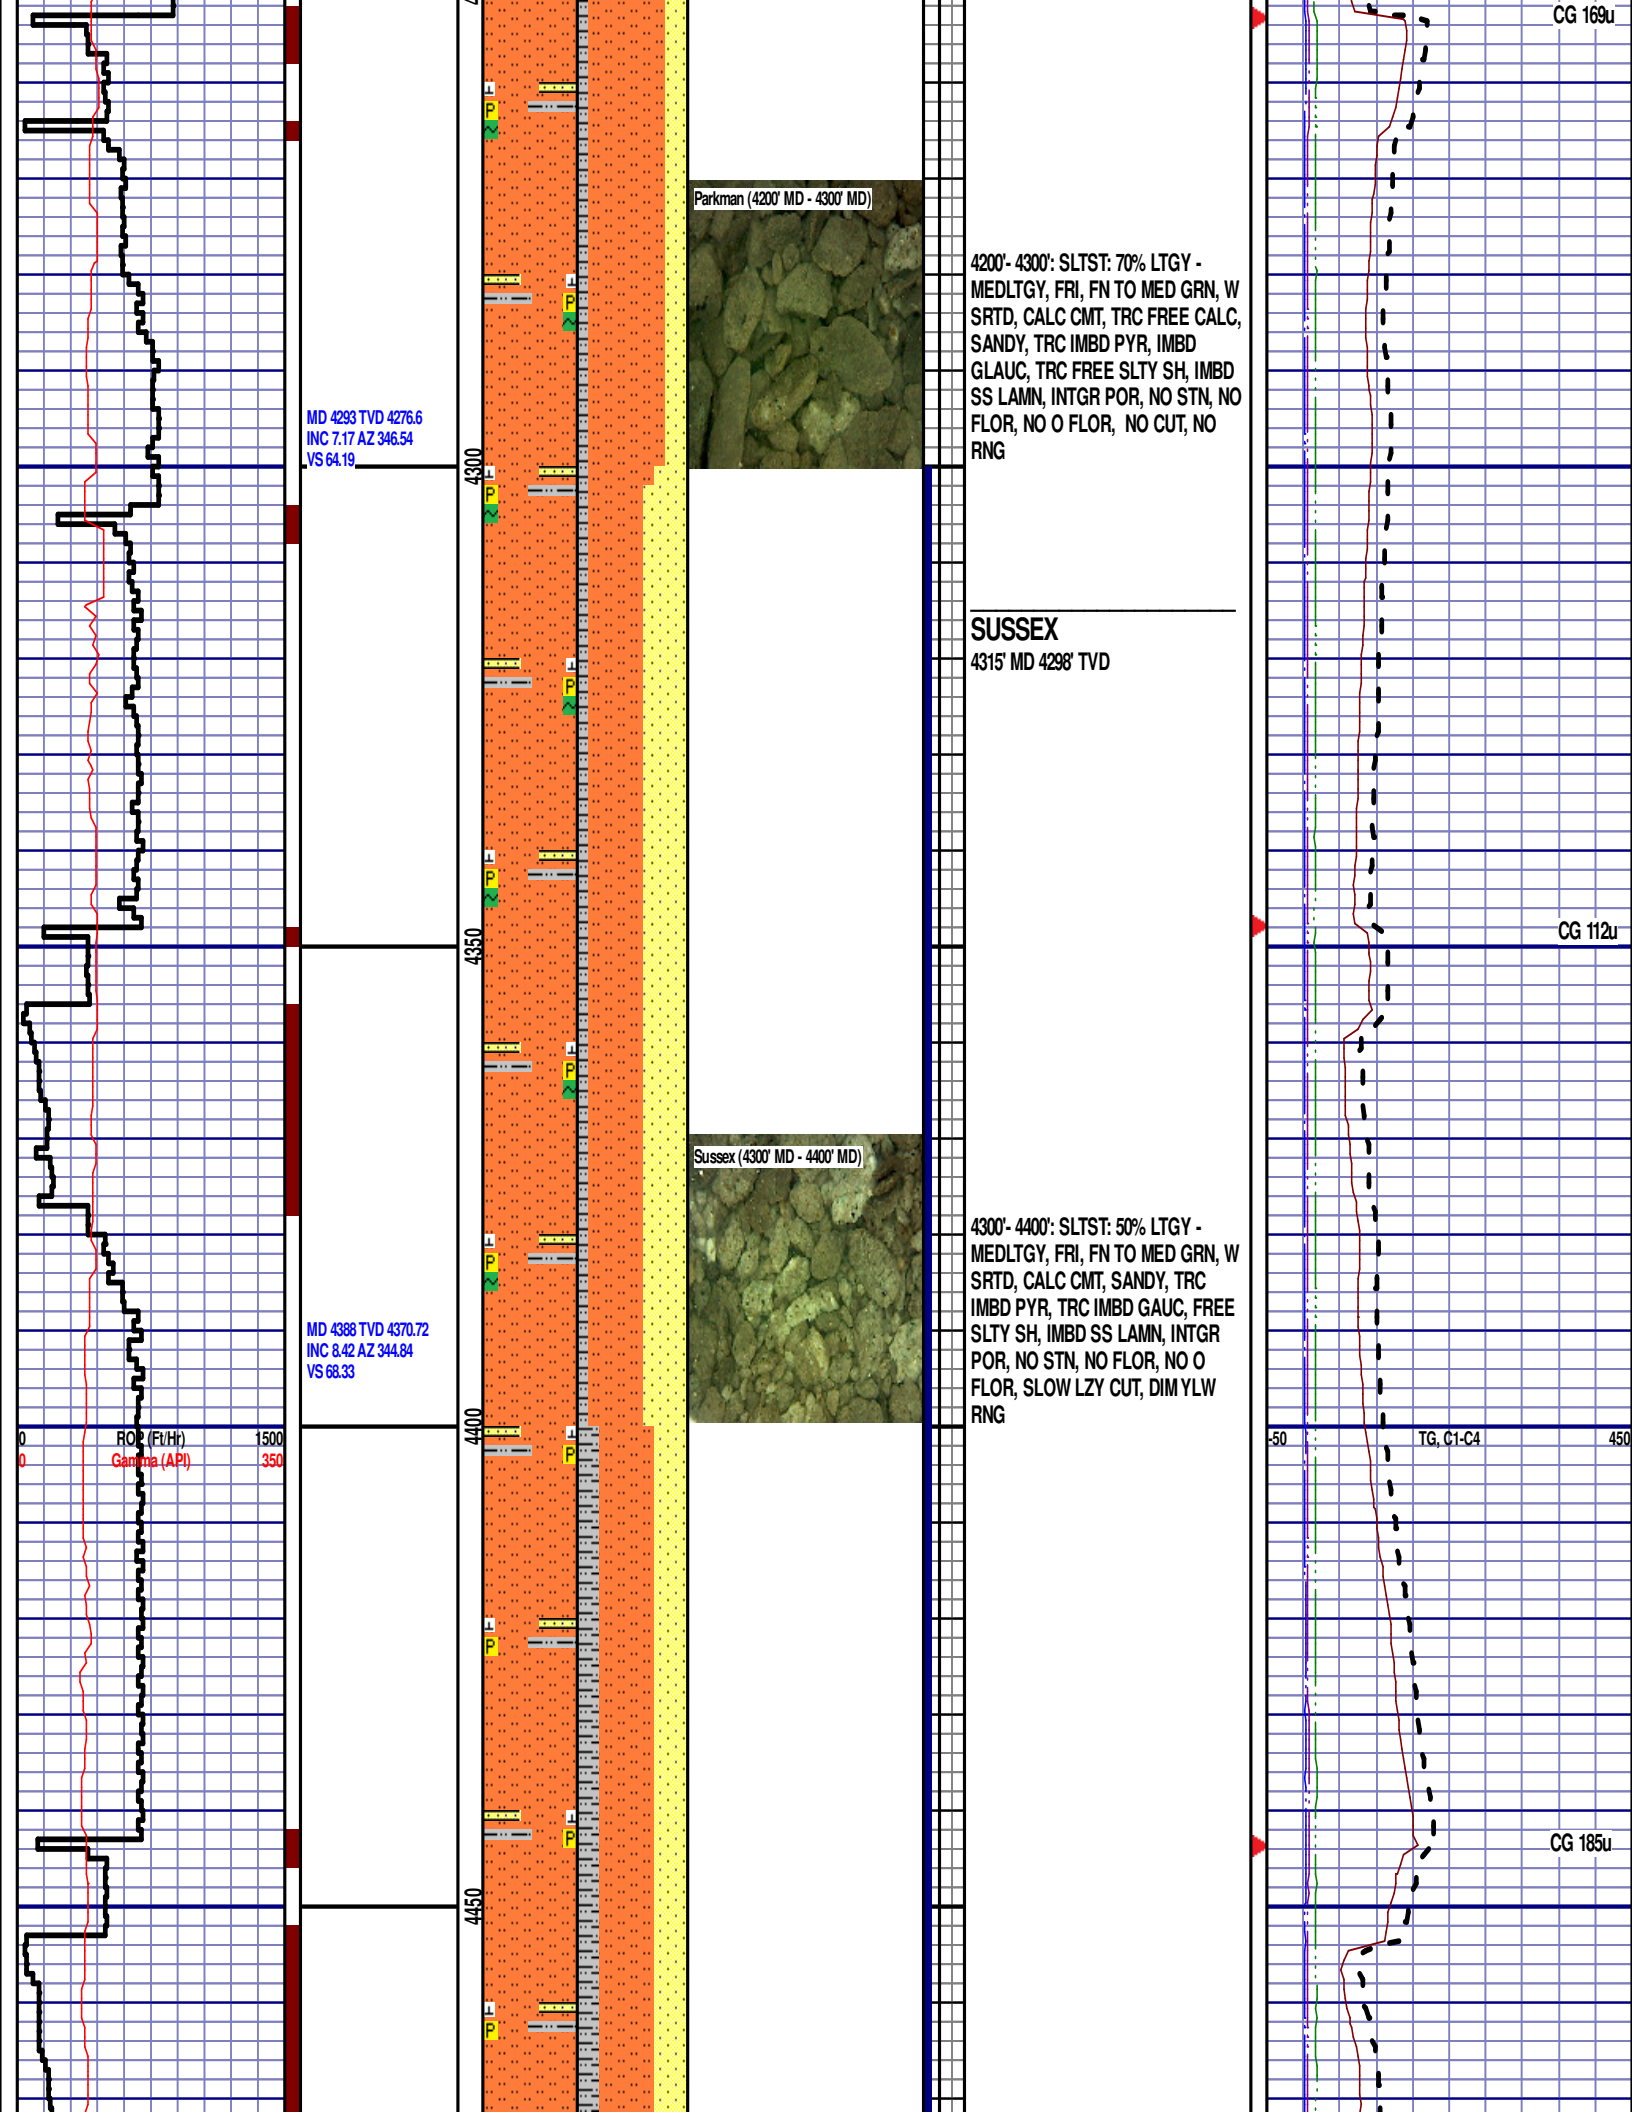

MD 4293 TVD 4276.6
INC 7.17 AZ 346.54
VS 64.19

MD 4388 TVD 4370.72
INC 8.42 AZ 344.84
VS 68.33



4200'- 4300': SLTST: 70% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, TRC FREE CALC,
SANDY, TRC IMBD PYR, IMBD
GLAUC, TRC FREE SLTY SH, IMBD
SS LAMN, INTGR POR, NO STN, NO
FLOR, NO O FLOR, NO CUT, NO
RNG

SUSSEX
4315' MD 4298' TVD



4300'- 4400': SLTST: 50% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, SANDY, TRC
IMBD PYR, TRC IMBD GAUC, FREE
SLTY SH, IMBD SS LAMN, INTGR
POR, NO STN, NO FLOR, NO O
FLOR, SLOW LZY CUT, DIM YLW
RNG

RO (Ft/Hr)
Gamma (API)

50 TG, C1-C4 450

MD 4483 TVD 4464.47
INC 10.14 AZ 346.27
VS 73.25

MD 4577 TVD 4557.19
INC 8.85 AZ 339.79
VS 78.83

MD 4672 TVD 4651.02
INC 9.22 AZ 353.61
VS 83.29

4400'- 4500': SLTST: 50% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, TRC FREE CALC,
SANDY, TRC IMBD PYR, FREE SLTY
SH, IMBD SS LAMN, INTGR POR,
NO STN, NO FLOR, NO O FLOR,
SLOW LZY CUT, DIM YLW RNG

4500'- 4600': SLTST: 65% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, SANDY, TRC
IMBD PYR, FREE SLTY SH, IMBD
SS LAMN, INTGR POR, NO STN, NO
FLOR, NO O FLOR, SLOW LZY CUT,
DIM YLW RNG

4600'- 4700': SLTST: 65% LTGY -
MEDLTGY, FRI, FN TO MED GRN, W
SRTD, CALC CMT, TRC FREE CALC,
SANDY, TRC IMBD PYR, TRC IMBD
GLAUC, FREE SLTY SH, IMBD SS


CG 227u


TG, C1-C4


CG 111u


Sussex (4600' MD - 4700' MD)



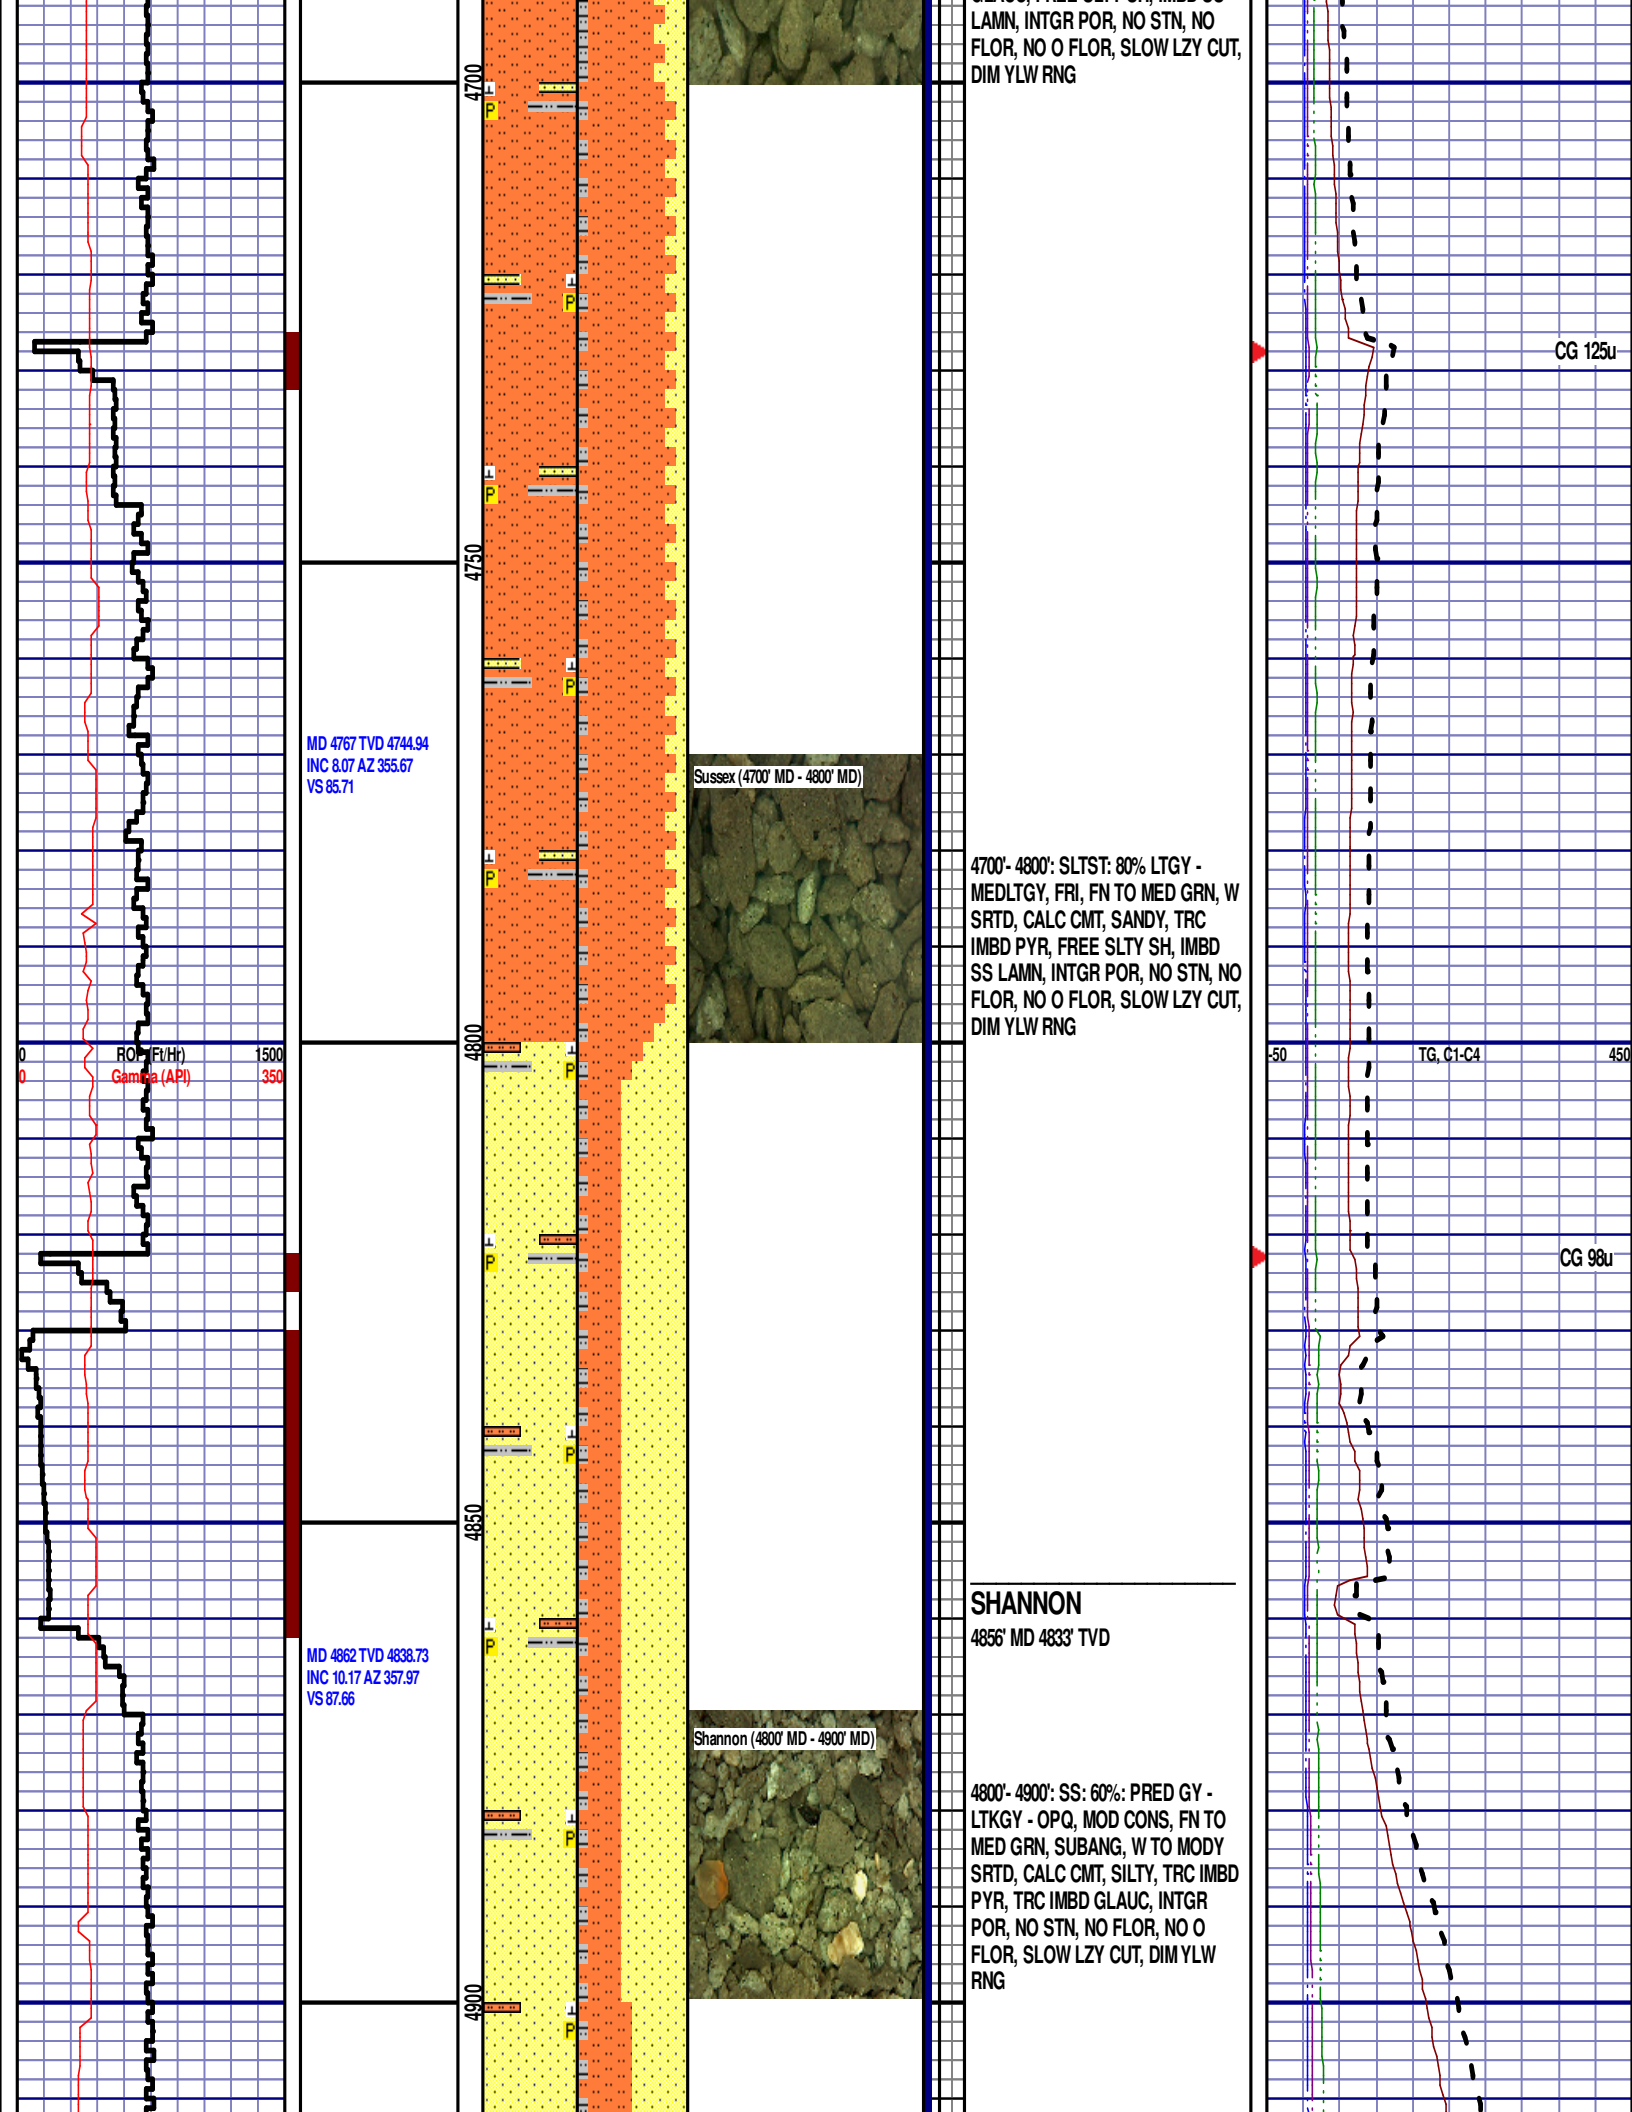

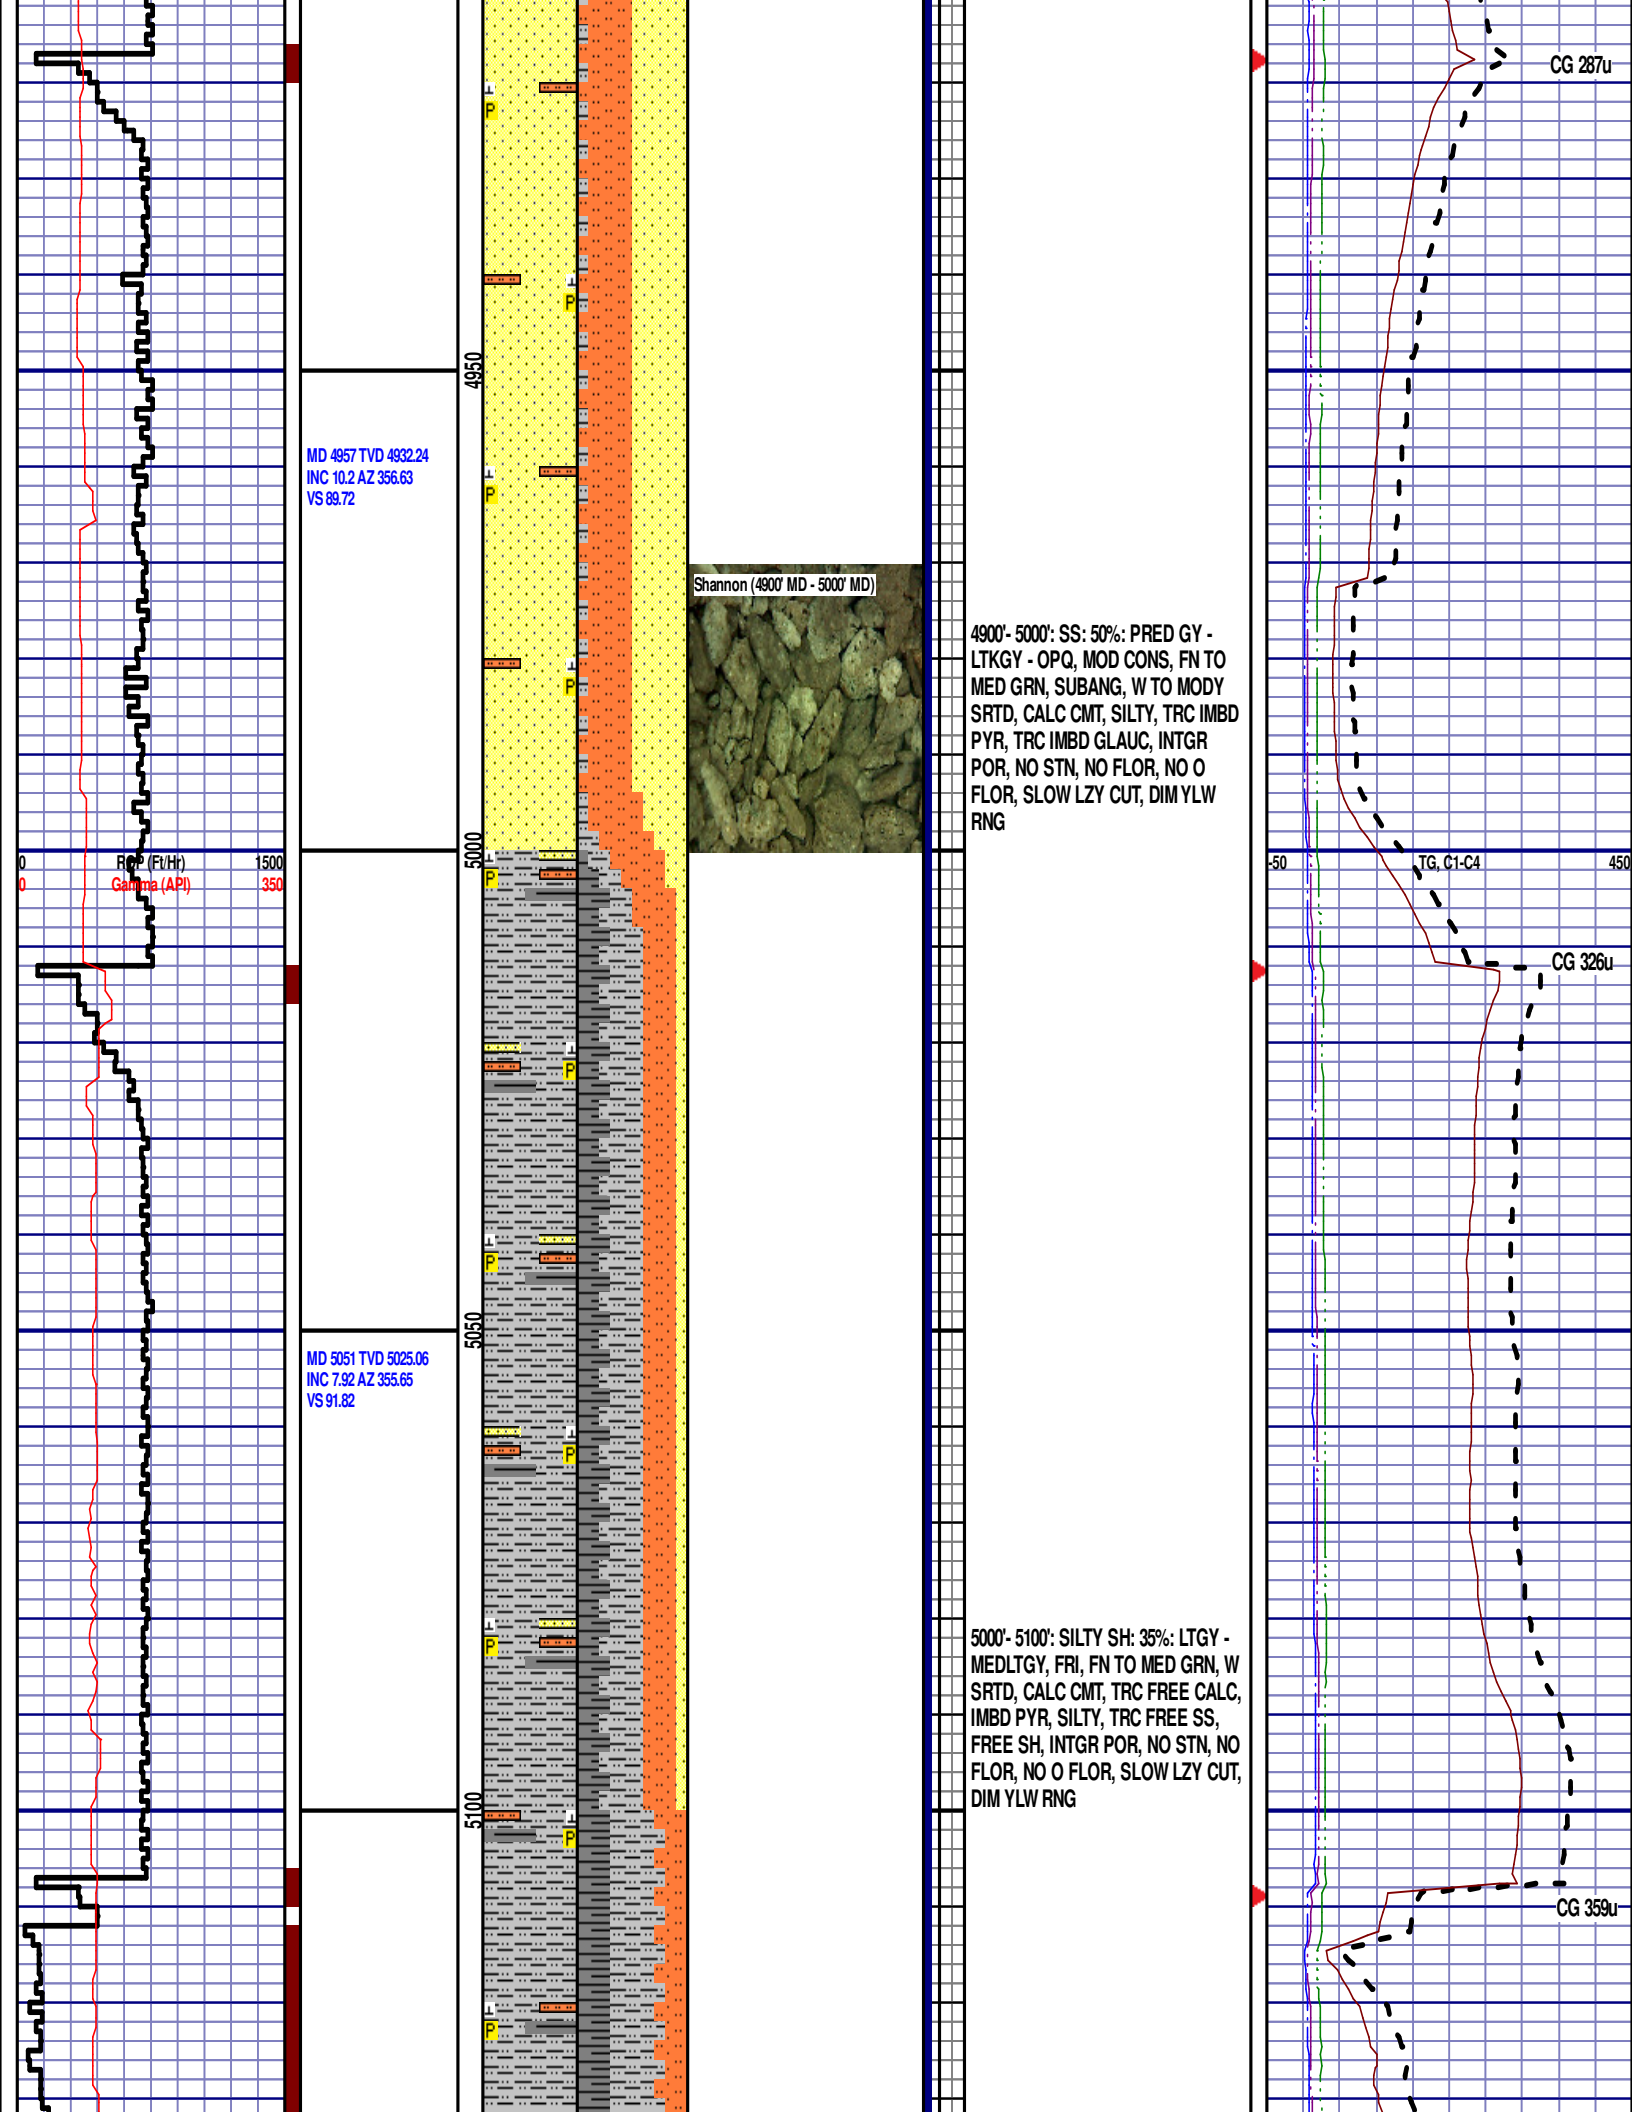

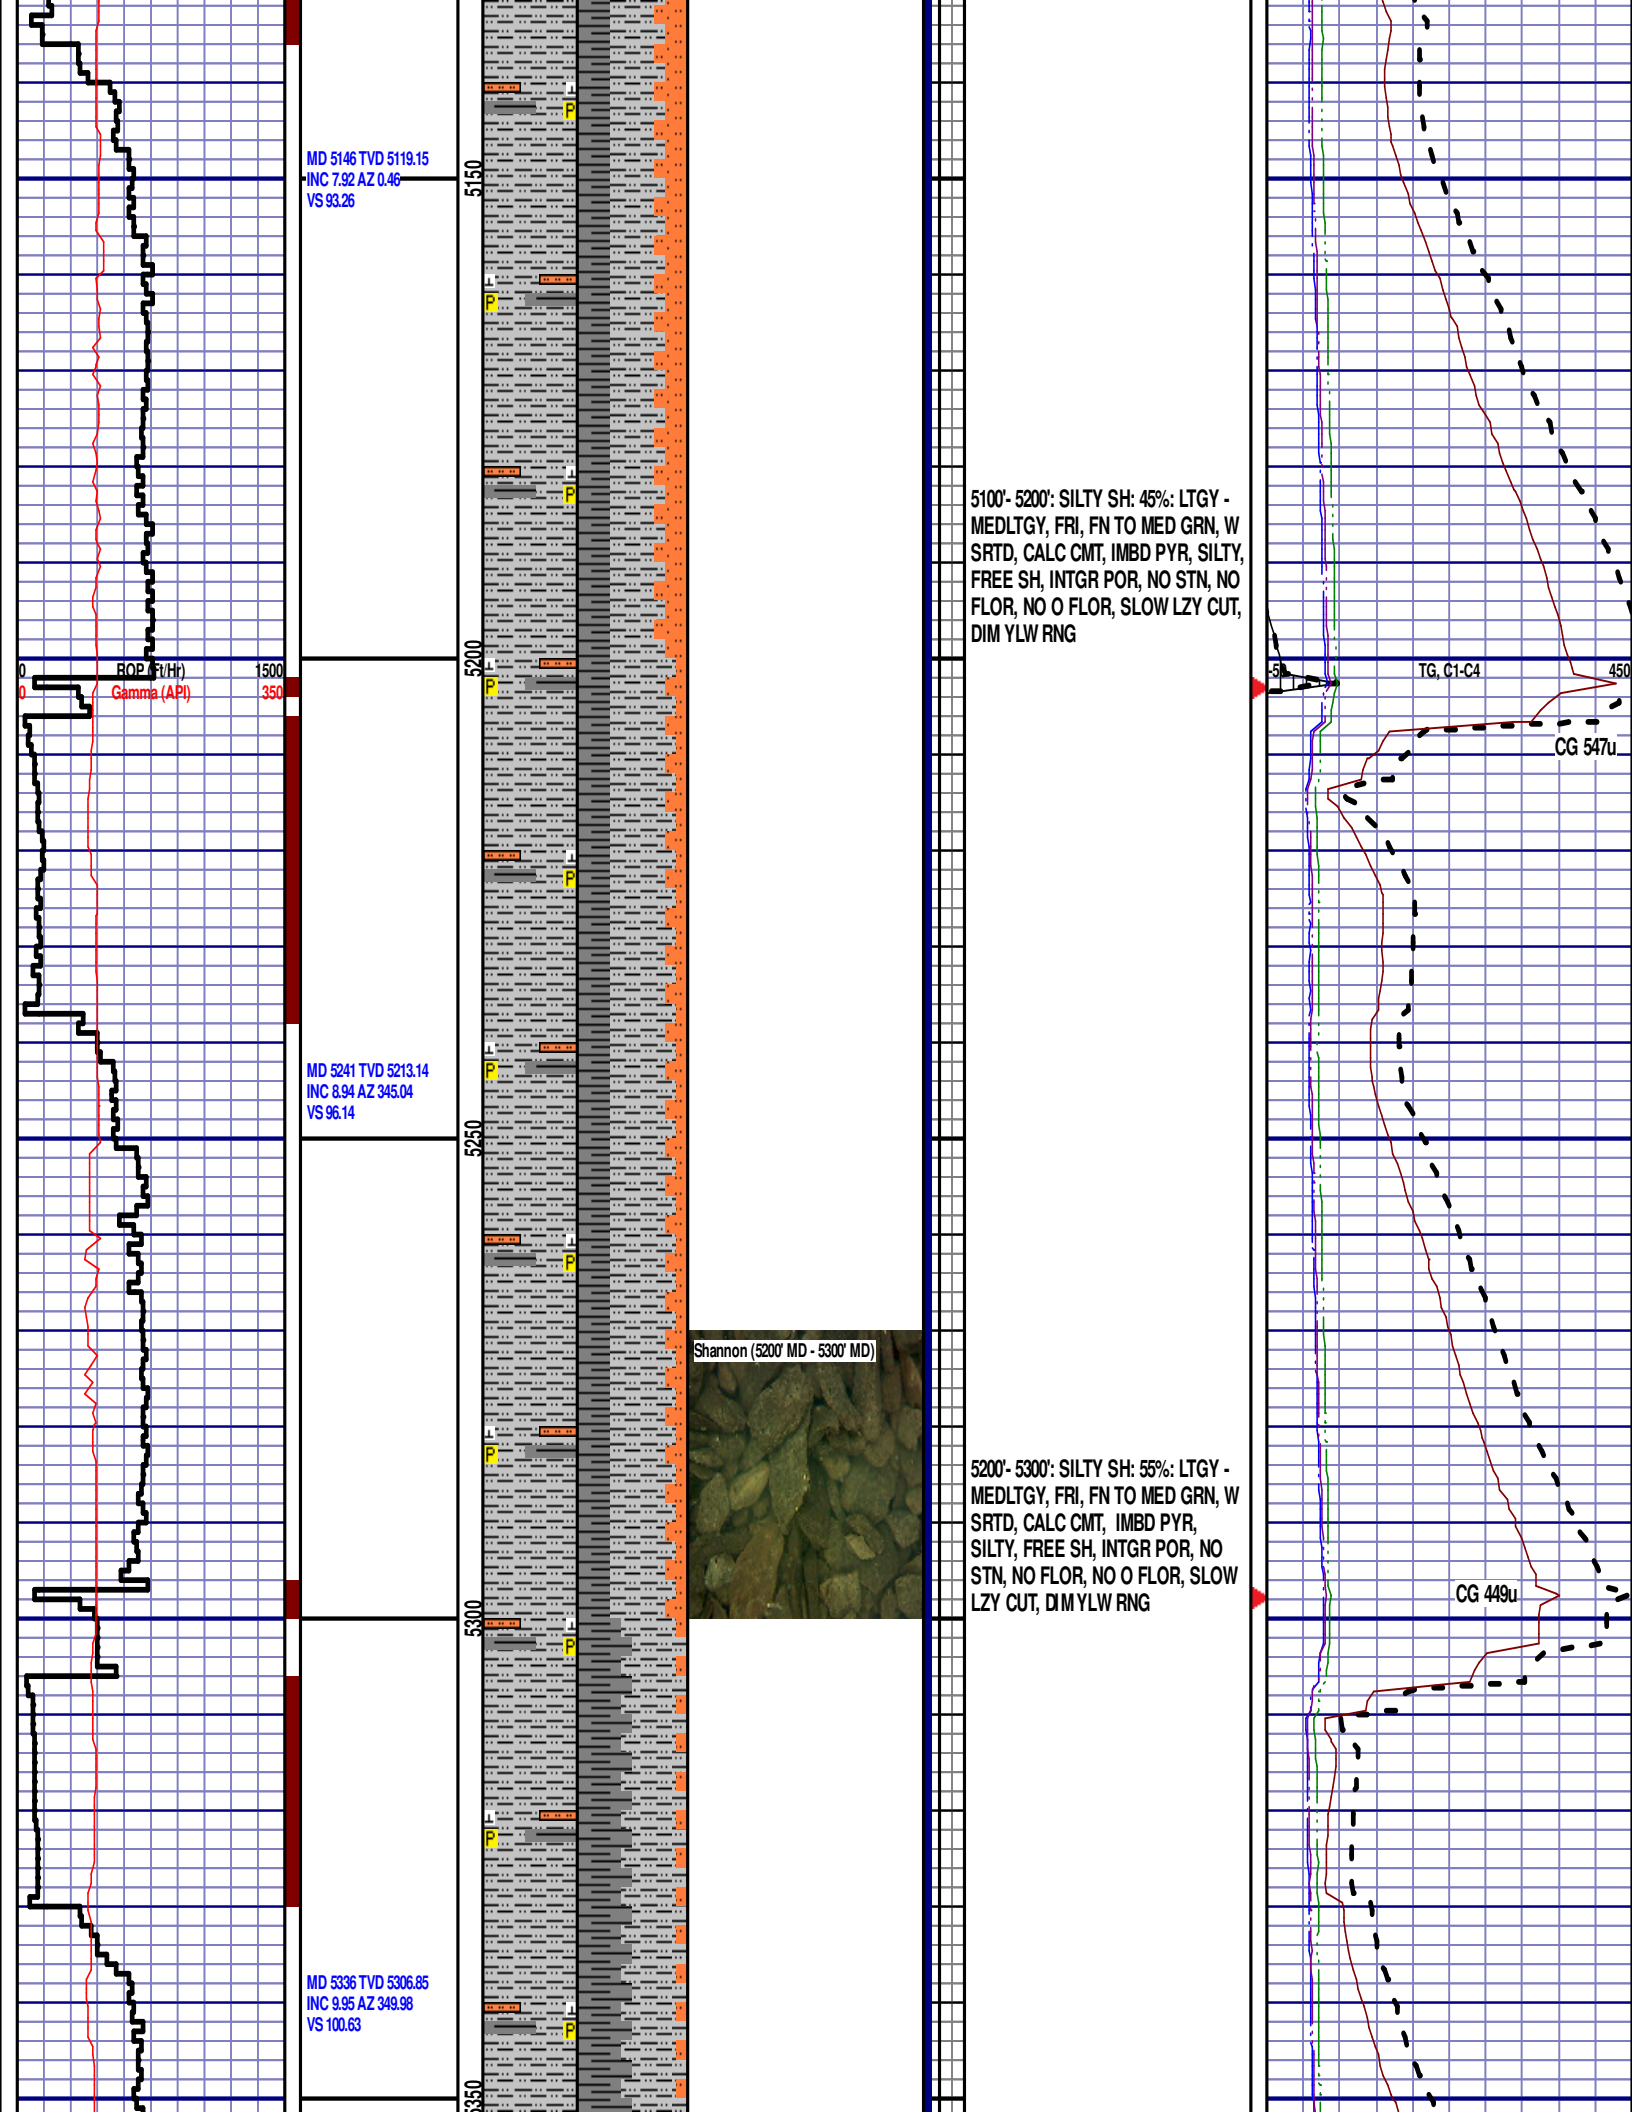

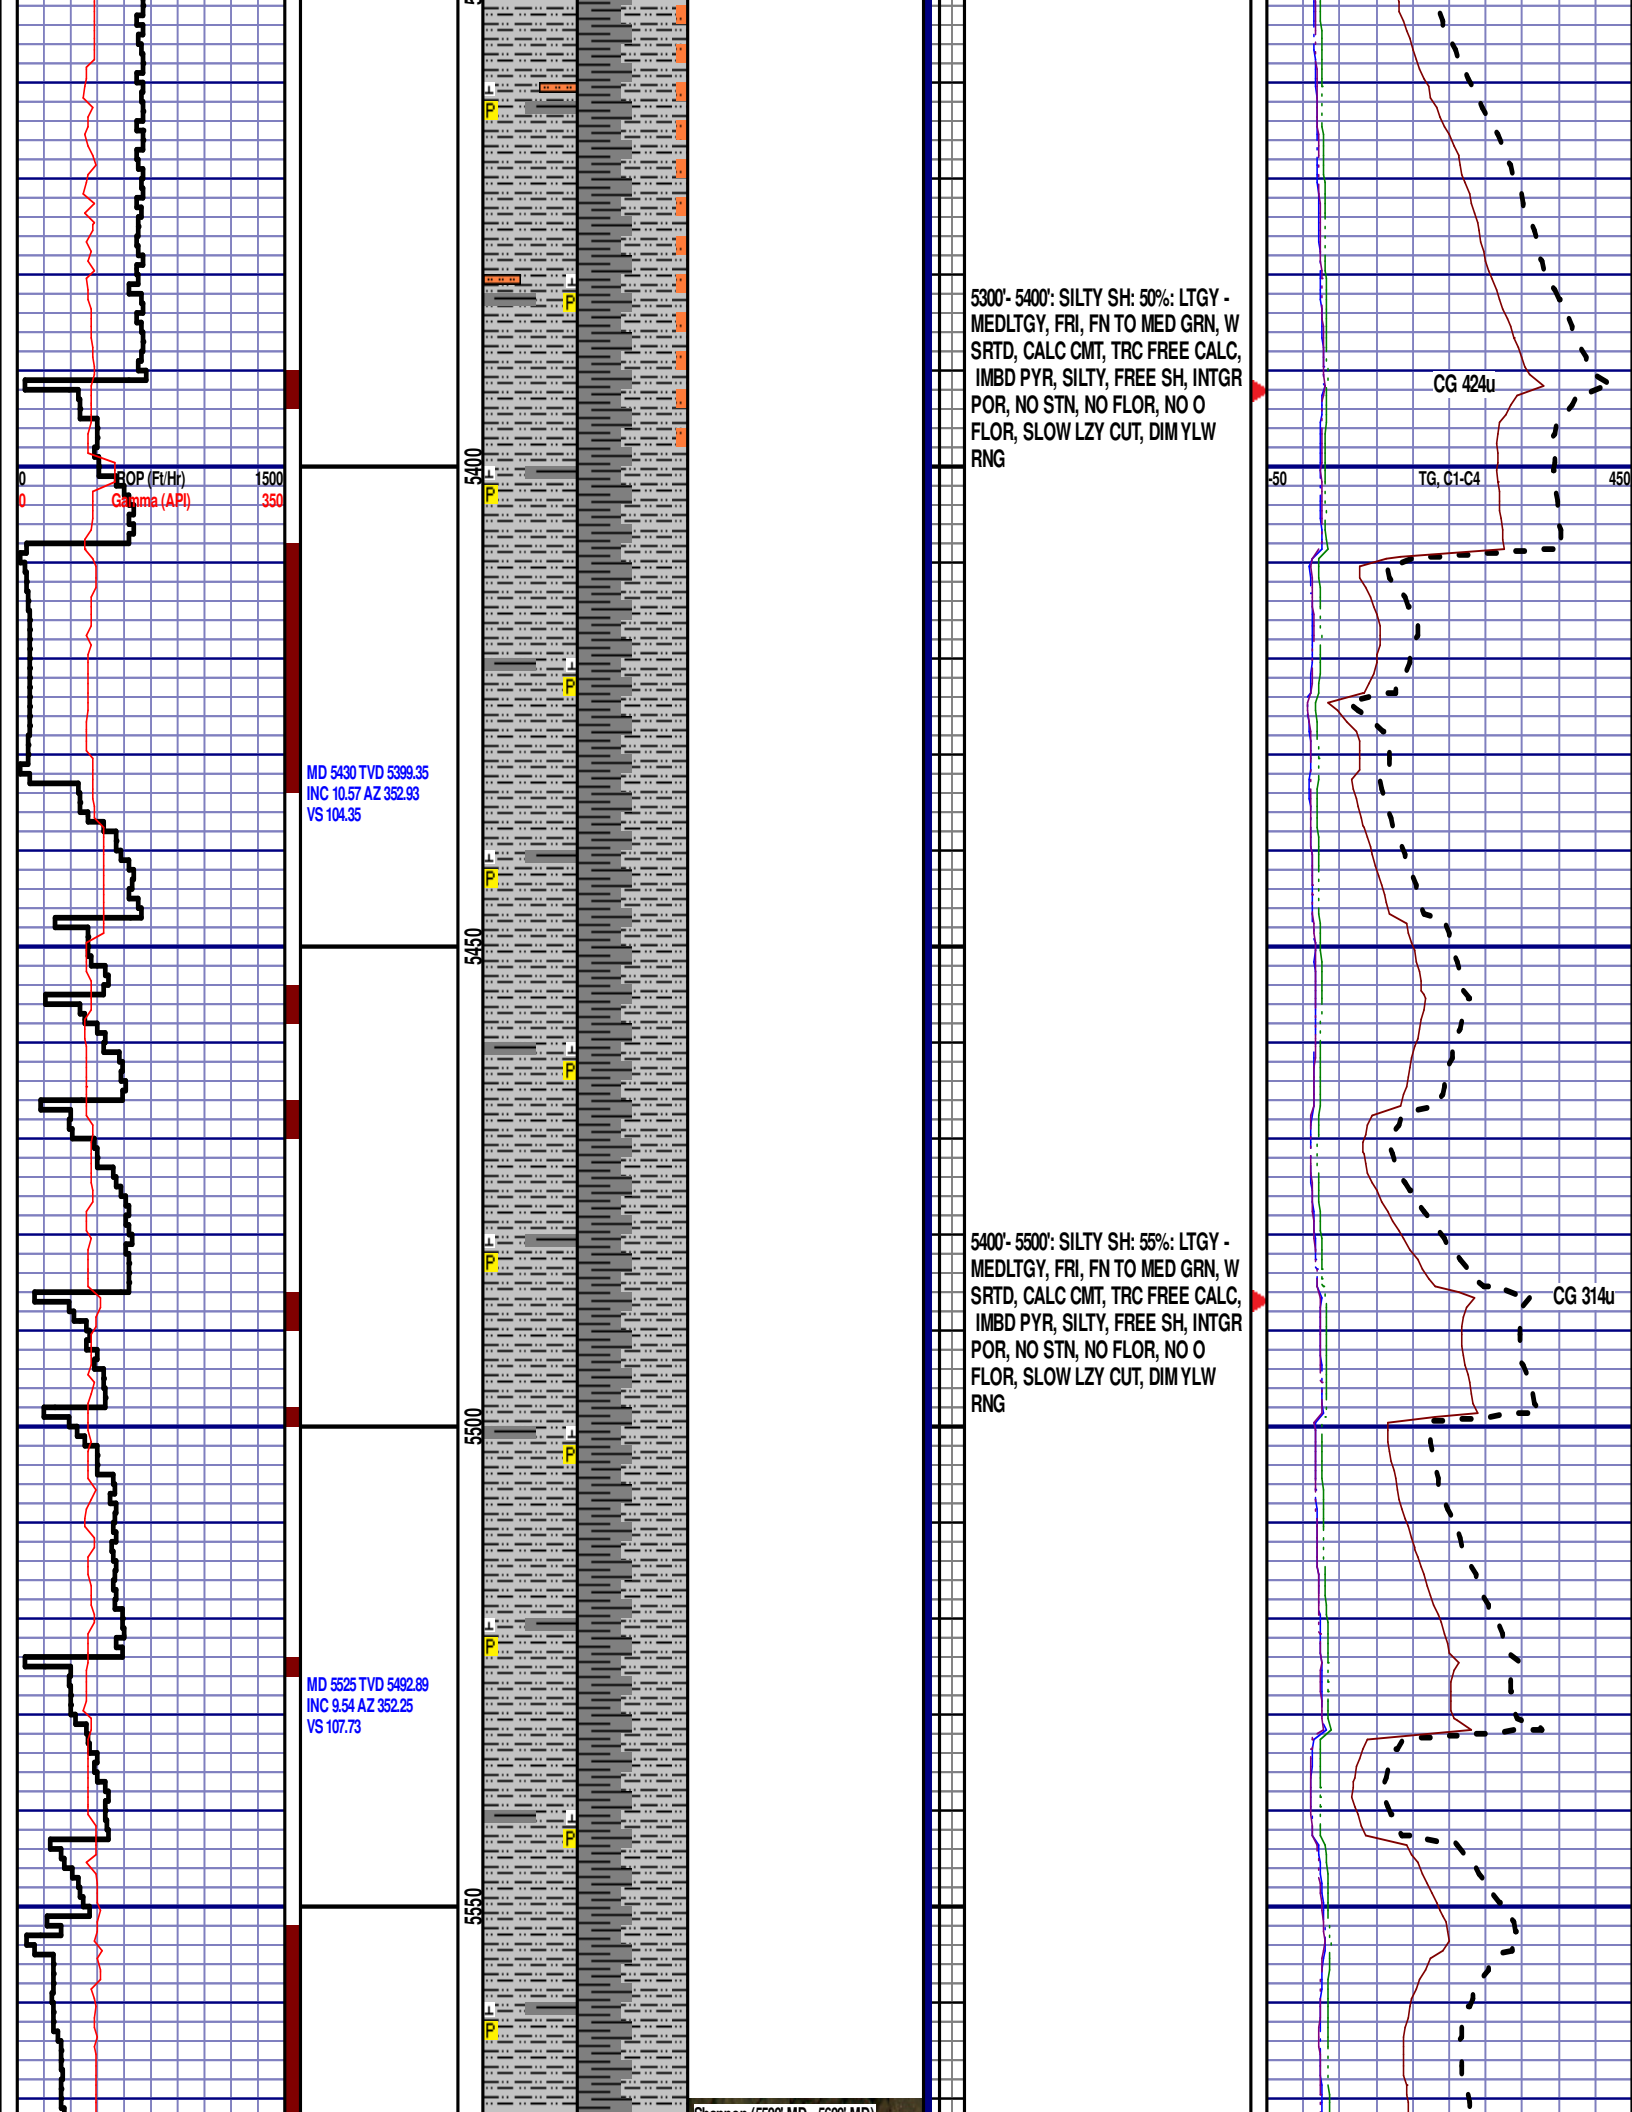

5300'- 5400': SILTY SH: 50%: LTGY - MEDLTGY, FRI, FN TO MED GRN, W SRTD, CALC CMT, TRC FREE CALC, IMBD PYR, SILTY, FREE SH, INTGR POR, NO STN, NO FLOR, NO O FLOR, SLOW LZ Y CUT, DIM YLW RNG

5400'- 5500': SILTY SH: 55%: LTGY - MEDLTGY, FRI, FN TO MED GRN, W SRTD, CALC CMT, TRC FREE CALC, IMBD PYR, SILTY, FREE SH, INTGR POR, NO STN, NO FLOR, NO O FLOR, SLOW LZ Y CUT, DIM YLW RNG

