



Well: Fee 115X
(3524)
Field: Rangley, Co.

Survey Data

Run No.33

Survey Type: T-S-T
Date: 05/06/2015
Metered Rate: 890 B/D
Measured Rate: 847 B/D
Desired Rate: N/A
Service Co: PLS
Surface Temp: 95.9 °F
BHT: 112.6 °F
TBG Pressure: 1120 PSI
CSG Pressure: 0 PSI
Pick Up: 5846' TDL
Inj. Fluid: H₂O


Remarks

R/A Tracer indicates top perf and packers O.K.
05-06-15, Ran 1.75" G/R to 5854'. Unable to get any deeper.


Recorded By: J.R. Hacking

Mechanical Information


7" 23# Casing 0'-6534'
P.B.T.D 6475'-6534'
2-7/8" F.L. Tubing 0'-5450'
Top Packer 5450'-5457'
2-7/8" F.G.W. TBG&TK-15 5457'-5489'
Ext On/Off Tool 5489'-5494'
6' Pup 5494'-5500'
Packer 5500'-5504'
2-7/8" F.G.W. Tubing 5504'-5568'
M-18 "B"

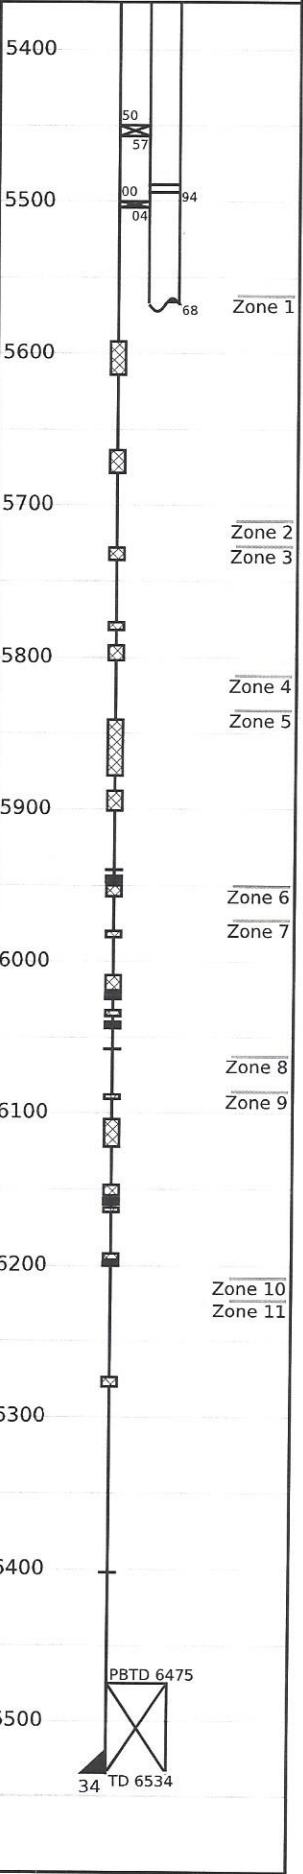

0% 50% 100%

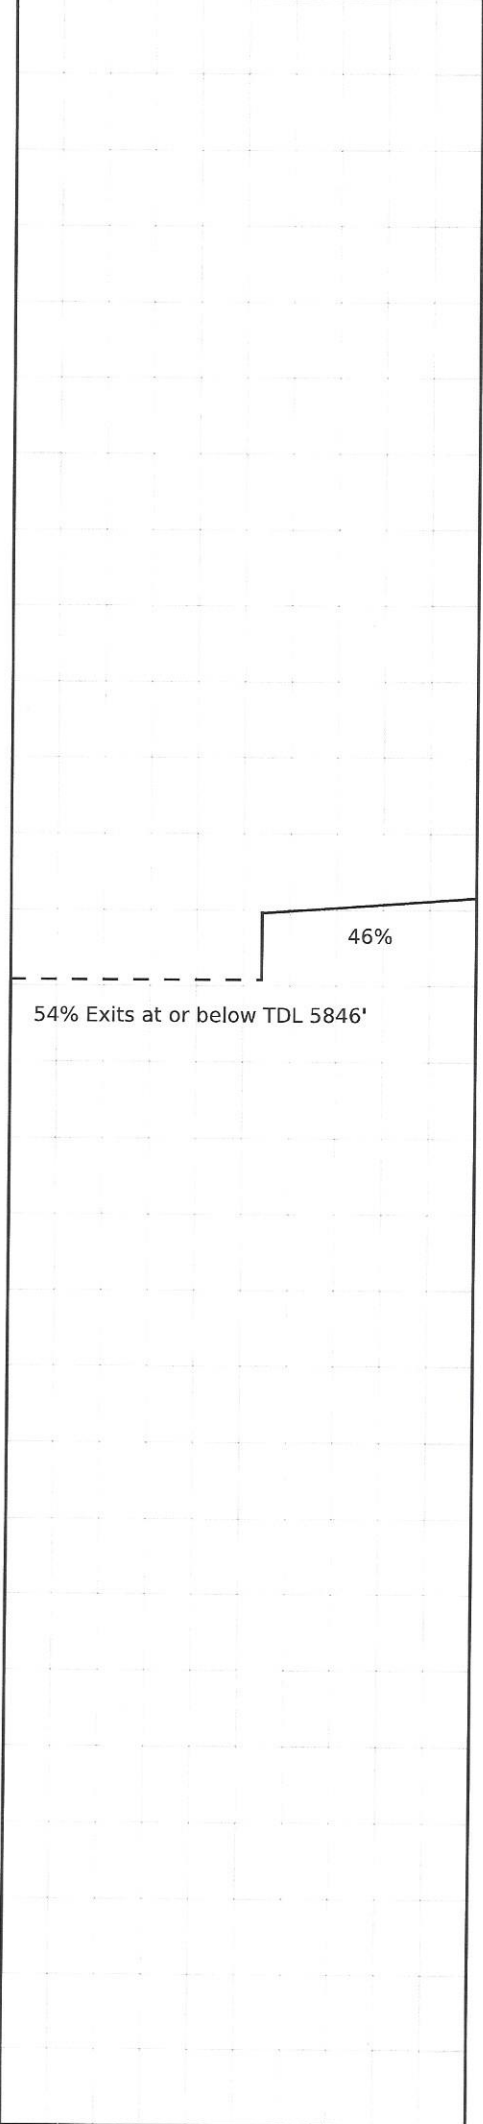

(%) Injected Into Zone

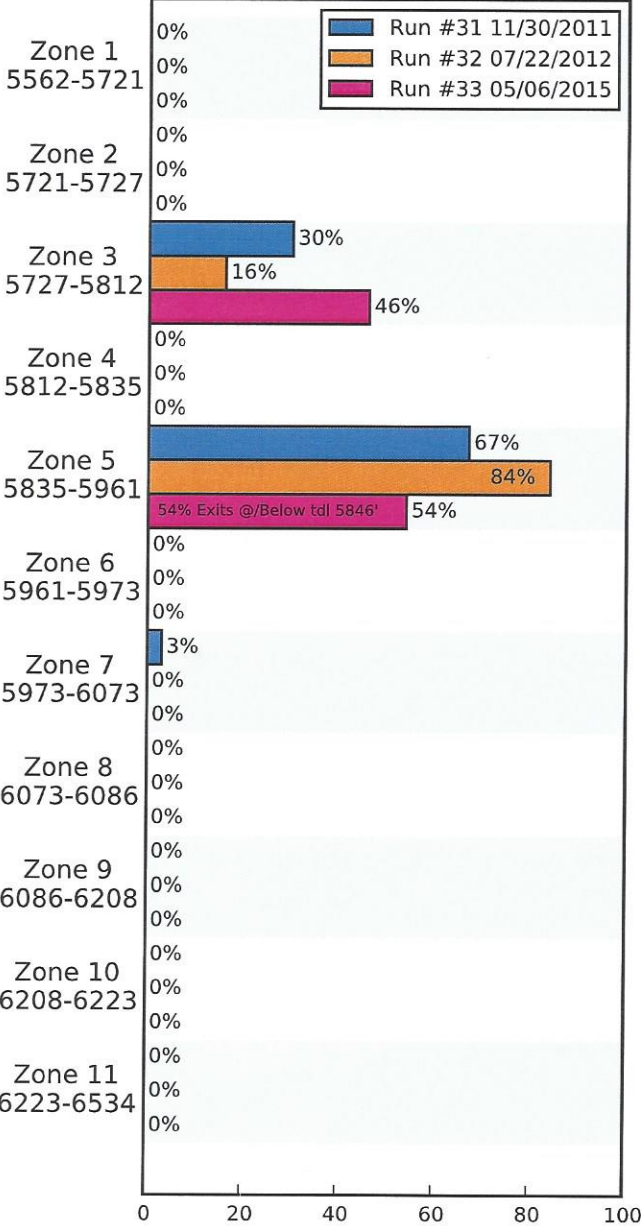

	Run #31 11/30/2011	Run #32 07/22/2012	Run #33 05/06/2015
Surface	97.9	98.5	95.9
5562-5721	--	--	--
5721-5727	--	--	--
5727-5812	--	--	--
5812-5835	--	--	--
5835-5961	--	--	--
TDL (5846)	137.7	139.4	112.6
5961-5973	--	--	--
5973-6073	--	--	--
6073-6086	--	--	--
6086-6208	--	--	--
6208-6223	--	--	--
6223-6534	--	--	--
Rate (B/D)	1322	None	847
Press (PSI)	1000	1100	1120