



Received - Denver  
 JUN 09 2014  
 EnerJex Resources, Inc.

PAGE 1 of 1	CUST NO 1007359	INVOICE DATE 05/22/2014
INVOICE NUMBER 1724 - 91497751		

FT Morgan - 970-867-2766  
 B BLACK RAVEN ENERGY INC  
 I 1331 17TH ST STE 350  
 L DENVER  
 L CO US 80202  
 T  
 O ATTN: ACCOUNTS PAYABLE

J LEASE NAME HOUGH #B-1  
 O LOCATION NW/NW SEC 7-T1N-R57W  
 B COUNTY MORGAN  
 S STATE CO  
 I JOB DESCRIPTION Acid-Form Stim-Producing  
 T JOB CONTACT  
 E

JOB #	EQUIPMENT #	PURCHASE ORDER NO.	TERMS	DUE DATE
40725205	70291-0		Net - 30 days	06/21/2014

For Service Dates: 05/21/2014 to 05/21/2014

0040725205

172417898F Acid-Form Stim-Producing 05/21/2014  
 NW/NW SEC 7-T1N-R57W

	QTY	U of M	UNIT PRICE	INVOICE AMOUNT
NE-9	10.00	EA	41.65	416.46
CL-57	4.00	EA	24.30	97.20
CL-58	4.00	EA	22.37	89.47
ACID INHIB-3	4.00	EA	31.67	126.66
ACID INHIB-7	4.00	EA	28.80	115.20
S-1	10.00	EA	23.05	230.50
BIO-1	1.00	EA	105.05	105.05
IC-100	40.00	EA	6.92	276.62
PC-1	6.00	EA	28.50	170.98
ACETIC ACID, 10%	1,000.00	GAL	1.97	1,965.48
HCL 7.5%	1,000.00	GAL	1.03	1,025.76
LIGHT EQUIPMENT MILEAGE	40.00	HR	2.81	112.50
HEAVY EQUIPMENT MILEAGE	40.00	MI	4.63	185.30
TRANSPORT DELIVERY CHARGES	4.00	EA	99.27	397.07
ACID PUMP SERVICE 1001-2000 PSI	1.00	EA	595.60	595.60
SERVICE SUPERVISOR	1.00	HR	152.21	152.21
EQUIPMENT OPERATOR	3.00	HR	76.10	228.31

Company/JV:  
 Date: 6-19-14  
 Details: ICC Code \$  
 9359  
 Approved: BAH

POSTED

PLEASE REMIT TO:	SEND OTHER CORRESPONDENCE TO:	SUB TOTAL	6,290.37
BASIC ENERGY SERVICES, LP	BASIC ENERGY SERVICES, LP	TAX	0.00
PO BOX 841903	801 CHERRY ST, STE 2100	INVOICE TOTAL	6,290.37
DALLAS, TX 75284-1903	FORT WORTH, TX 76102		

*[Handwritten Signature]*

11497751

40025305

1734



P.O. Box 219  
Fort Morgan, CO 80701  
PH (970) 867-2766 FAX (970) 867-5922

SERVICE ORDER - 17898 <sup>AE</sup>

Date: 5/21/2014

Well Name: HOUGH RMB-1	Location: NW/NW, SEC. 7-T1N-R57W
County - State: MORGAN, CO	RRC #:
Type Of Service: ACID	Customer's Order #:

Customer: BLACK RAVEN ENERGY  
 BILLY HATAWAY  
 Address: 1331 17TH ST. STE 350  
 DENVER, CO 80202

As a consideration, the above named Customer agrees to pay Basic Energy Services in accord with the rates and terms stated in Basic Energy Services current price lists. Invoices are payable NET 30 (SEE 10.2) after date of invoice. Upon Customer's default in payment of Customers account by such date, Customer agrees to pay interest thereon after default at 18% per annum. In the event it becomes necessary to employ an attorney to enforce collection of said account, Customer agrees to pay all the collection costs and attorney fees. These terms and conditions shall be governed by the laws of the state where services are performed or equipment or materials are furnished.

Basic Energy Services, warrants only title to the products, supplies and materials and that the same are free from defects in workmanship. THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE WHICH EXTEND BEYOND THOSE STATED IN THE IMMEDIATELY PRECEDING SENTENCE. Basic Energy Services, liability and Customer's exclusive remedy in any cause of action (whether in contract, tort, product liability, breach of warranty or otherwise) arising out of the sale or use of any products, supplies, or materials upon their return to Basic Energy Services, is expressly limited to the replacement of such products, supplies or materials or, at Basic Energy Services, option, to the allowance to the Customer of credit for the cost of such items. In no event shall Basic Energy Services be liable for special, indirect, punitive or consequential damages.

CODE	QTY	UOM	DESCRIPTION	PRICE	TOTAL
RM109	10	Gal	NE-9, Non-Emulsifier	62.93	629.30
RM257	4	Gal	CL-57, Liquid Kcl Replacement	36.72	146.88
RM258	4	Gal	CL-58, Liquid Kcl Replacement	33.80	135.20
RM303	4	Gal	Acid Inhib-3, Acid Inhibitor (Moderate Temp)	47.85	191.40
RM307	4	Gal	Acid Inhib-7, Acid Inhibitor (Organic)	43.52	174.08
RM321	10	Gal	S-1, Surfactant	34.83	348.30
RM581	1	Gal	BIO-I, Liquid Biocide	158.74	158.74
RM610	40	Lb	IC-100, Iron Control	10.45	418.00
RM621	6	Gal	PC-1, Paraffin Controller/Dispersant	43.06	258.36
RM6503	1000	Gal	ACETIC ACID, 10%	2.97	2970.00
RM5503	1000	Gal	HCL, 7.5%	1.55	1550.00
E100	40	Mi	Light Equipment Mileage	4.25	170.00
E101	40	Mi	Heavy Equipment Mileage	7.00	280.00
E110	4	Hr	Transport Delivery Charges, per hr (4 hr min.)	150.00	600.00
E221	1	Ea	Acid Pump Service, 1001-2000 PSI	900.00	900.00
S003	1	Ea	*Service Supervisor, first 8 hrs on loc.	230.00	230.00
S005	3	Ea	*Equipment Operator, first 8 hrs on loc.	115.00	345.00
<i>Thank you</i>					

Book Total:	9,505.26
Taxes:	
Disc. Price:	6,290.37

TRUCK NUMBER: 70291  
 DRIVER: Rich S., Eddie, Jose  
Ronald Peterson  
 BASIC ENERGY SERVICES

THIS JOB WAS SATISFACTORILY COMPLETED	<input type="checkbox"/>	YES	<input type="checkbox"/>	NO
OPERATION OF EQUIPMENT WAS SATISFACTORY	<input type="checkbox"/>		<input type="checkbox"/>	
PERFORMANCE OF PERSONNEL WAS SATISFACTORY	<input type="checkbox"/>		<input type="checkbox"/>	

Billy Hataway  
 CUSTOMER OR HIS AGENT SIGNATURE

Date: 21-May-14

Well Name:	Location:	Customer Rep:	Field Order #
HOUGH RMB-1	NW/NW,SEC.7-T1N-R57W	BILLY HATAWAY	17898
Stage:	Formation:	Treat Via:	Allowable Pressure Tbg Csg Well Type:
	J SAND	TUBING	3,000 OIL
County:	State:	Well Age:	PackerType: PackerDepth: Csg Size:
MORGAN	CO	REWORK	5,589 5.5
Type Of Service:	7.5% HCL & 10% ACETIC ACID JOB	Csg Depth:	Tbg Size: Tbg Depth: Liner Size:
			2.875
Customer Name:	BLACK RAVEN	Liner Depth:	Liner Top: Liner Bot: Total Depth:
Address:	BILLY HATAWAY 1331 17th STREET, SUITE 350 DENVER CO 80202		
Remarks:	SAFETY MEETING PRIME UP PRESSURE TEST TO 4000 PSI ST ACID, 48 BBL ST FLUSH,33 BBL & 5 BBL OVERFLUSH HOLE LOADED @ 57 BBL PMPED SHUT DOWN,WELL ON INSTANT VAC	Open Hole:	Csg Vol: BHT:
		5606	5634 0 0
		Perf Depths:	Perfs: TotalPerfs:
			0 0


TIME	INJECTION RATE		PRESSURE		REMARKS	PROP (lbs)	FOAM/FLD (gls)	FLUID (bbis)
	FLUID	N2/CO2	STP	ANNULUS				
12:36	0.0		0		SAFETY MEETING	0	0	0.0
12:42	0.1		492		PRIME UP & PRESS TEST TO 4000 PSI	0	0	0.0
12:45	2.0		-2		ST ACID, 48 BBL	0	2,000	48.0
12:55	3.9		5		ACID ON	0	0	0.0
12:59	6.2		60		ST FLUSH 33 BBL	0	1,386	33.0
13:00	5.0		496		HOLELOADED @ 57 BBL	0	0	0.0
13:04	9.5		2614		FLUSH ON, ST 5 BBL OVERFLUSH	0	210	5.0
13:05	1.1		167		SHUT DOWN, WELL ON INSTANT VAC	0	0	0.0
<b>Total:</b>						0	3,596	86.0

**Summary**

Max Fl. Rate	Avg Fl. Rate	Max Psi	Avg Psi
9.5	4.6	2,717	379

Customer Acknowledgement:	Service Rating:	Treater:	PRODUCTS USED
	<input type="checkbox"/> Satisfactory <input type="checkbox"/> Unsatisfactory	RON PETERSON	NE-9,CL-57,CL-58,ACID INHIB-3,ACID INHIB-7, S-1,BIO-1,IC-100,PC-1, 10% ACETIC & 7.5% HCL ACID BLEND

BLACK RAVEN  
HOUGH RMB-1 - J SAND - 7.5% HCL & 10% ACETIC ACID JOB

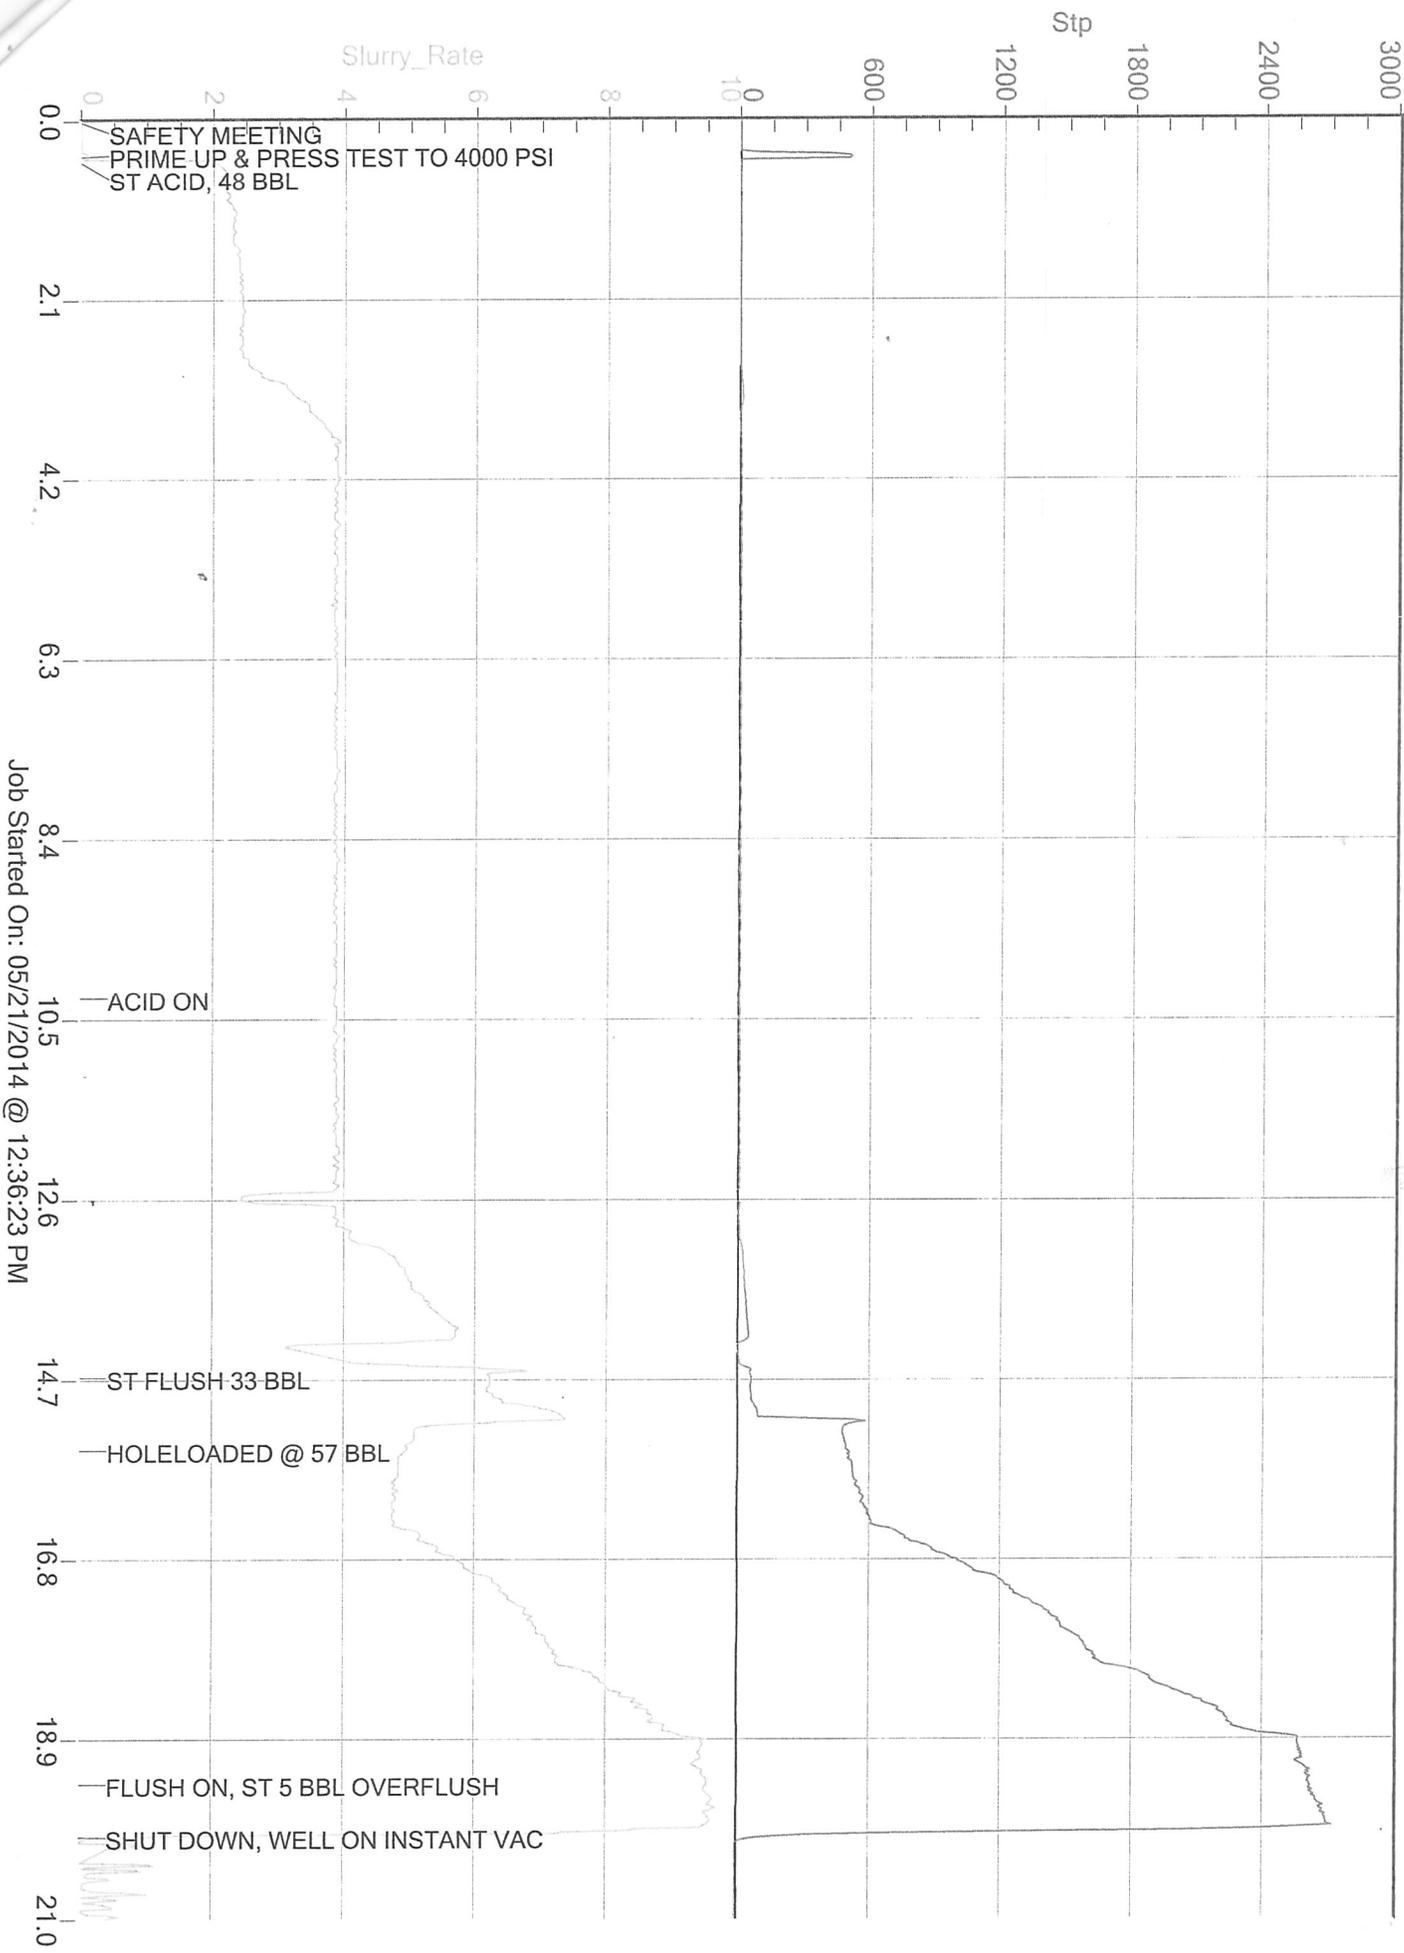

Job Started On: 05/21/2014 @ 12:36:23 PM