



Survey Data




Remarks

Well: Carney 29X-34
(5732)
Field: Rangley, Co.

Run No.9		R/A Tracer indicates top perf and packer O.K. Recorded By: J.R. Hacking
Survey Type: T-S-T	Surface Temp: 88.3 °F	
Date: 05/03/2016	BHT: 142.1 °F	
Metered Rate: N/A	TBG Pressure: 1775 PSI	
Measured Rate: 522 B/D	CSG Pressure: 0 PSI	
Desired Rate: N/A	Pick Up: 6150' TDL	
Service Co: PLS	Inj. Fluid: H ₂ O	

Mechanical Information

7" 23# Casing	0'-6415'
P.B.T.D	6390'
2-7/8" F.L. Tubing	0'-5342'
Top Packer	5342'-5349'
2-7/8" F.L. Tubing	5349'-5381'
On/Off Tool 1.875" "F"	5381'-5386'
Packer	5390'-5394'
2-7/8" F.G.W. Tubing	5394'-5978'
2-7/8" X 2-3/8" X Over	5978'-5978'
1.875" "XN" Nipple	5978'-5979'
Wireline Entry Guide	5979'
	Q-28
API No. 051030753700	

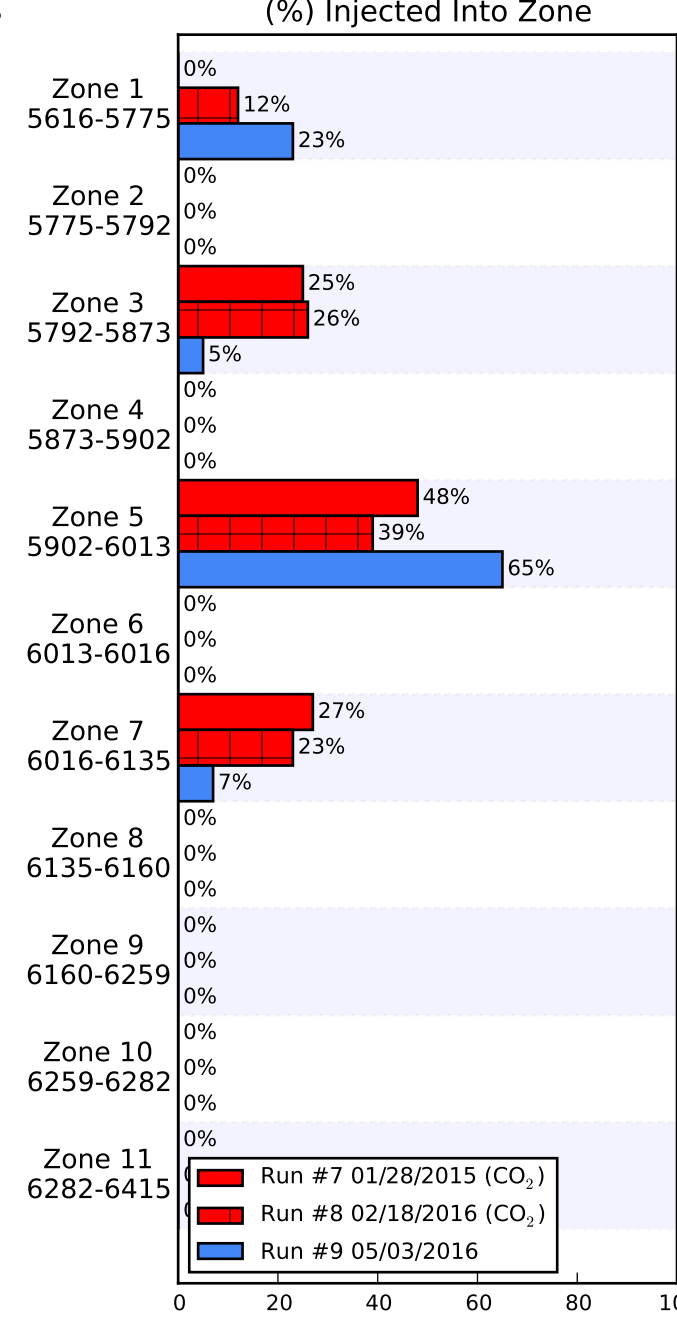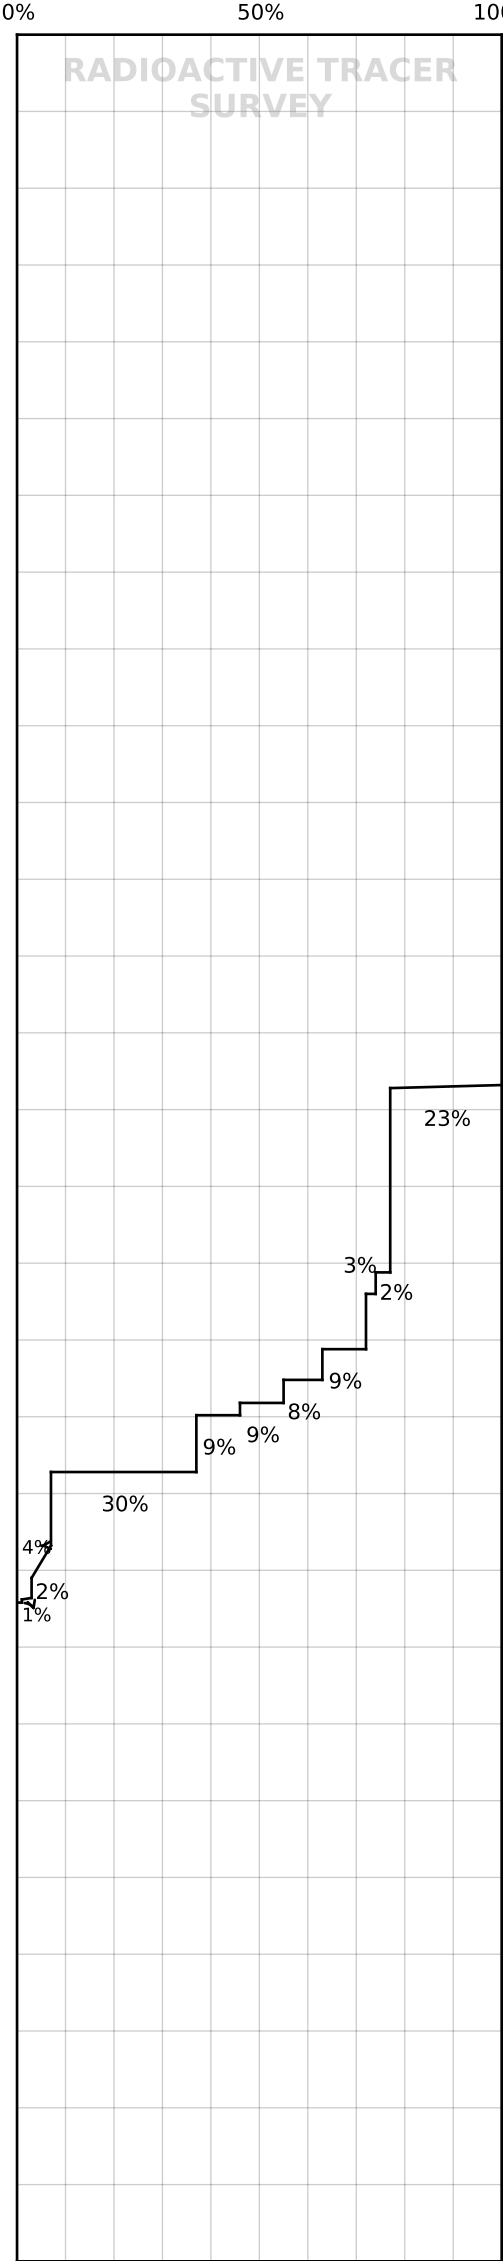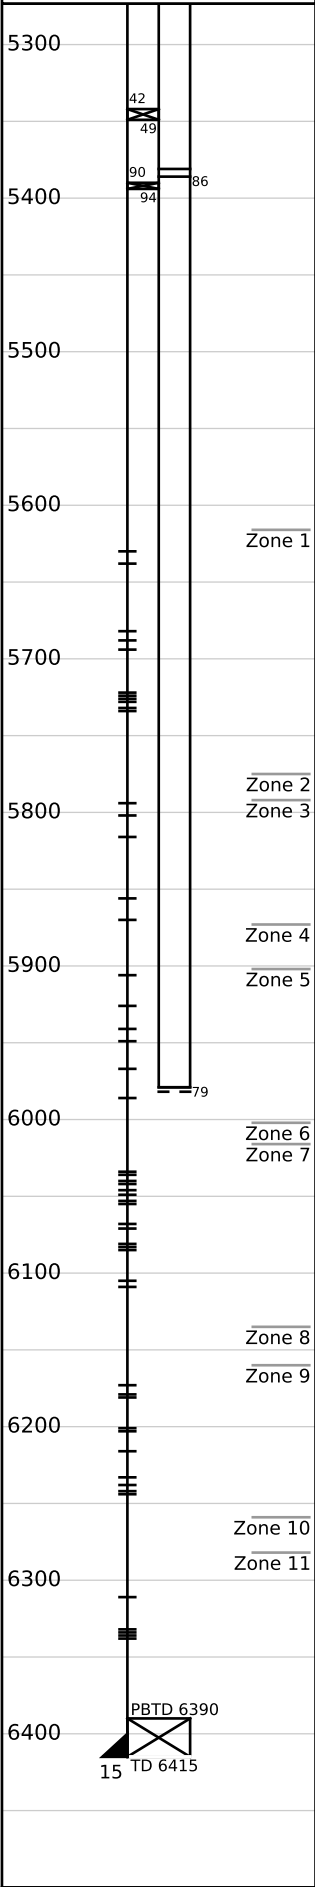

	Run #7 01/28/2015	Run #8 02/18/2016	Run #9 05/03/2016
Surface	65.8	57.8	88.3
5616-5775	--	--	--
5775-5792	--	--	--
5792-5873	--	--	--
5873-5902	--	--	--
5902-6013	--	--	--
6013-6016	--	--	--
6016-6135	--	--	--
6135-6160	--	--	--
TDL (6150)	133.8	139.5	142.1
6160-6259	--	--	--
6259-6282	--	--	--
6282-6415	--	--	--
Rate (B/D)	603	533	522
Press (PSI)	2150	2150	1775