

LEASE INFORMATION

Using standard QtrQtr, Sec, Twp, Rng format, describe one entire mineral lease that will be produced by this well (Describe lease beneath surface location if produced. Attach separate description page or map if necessary.)

Township 3 North, Range 67 West, 6th P.M.
Section 26: SW/4
Weld County, Colorado

Total Acres in Described Lease: 160 Described Mineral Lease is: Fee State Federal Indian

Federal or State Lease # _____

Distance from Completed Portion of Wellbore to Nearest Lease Line of described lease: 0 Feet

CULTURAL DISTANCE INFORMATION

Distance to nearest:

Building: 320 Feet
Building Unit: 558 Feet
High Occupancy Building Unit: 5280 Feet
Designated Outside Activity Area: 5280 Feet
Public Road: 292 Feet
Above Ground Utility: 275 Feet
Railroad: 5280 Feet
Property Line: 301 Feet

INSTRUCTIONS:

- All measurements shall be provided from center of the Proposed Well to nearest of each cultural feature as described in Rule 303.a.(5).
- Enter 5280 for distance greater than 1 mile.
- Building - nearest building of any type. If nearest Building is a Building Unit, enter same distance for both.
- Building Unit, High Occupancy Building Unit, and Designated Outside Activity Area - as defined in 100-Series Rules.

DESIGNATED SETBACK LOCATION INFORMATION

Check all that apply. This location is within a: Buffer Zone
 Exception Zone
 Urban Mitigation Area

- Buffer Zone – as described in Rule 604.a.(2), within 1,000' of a Building Unit
- Exception Zone - as described in Rule 604.a.(1), within 500' of a Building Unit.
- Urban Mitigation Area - as defined in 100-Series Rules.

Pre-application Notifications (required if location is within 1,000 feet of a building unit):

Date of Rule 305.a.(1) Urban Mitigation Area Notification to Local Government: _____

Date of Rule 305.a.(2) Buffer Zone Notification to Building Unit Owners: 11/03/2016

SPACING and UNIT INFORMATION

Distance from completed portion of proposed wellbore to nearest completed portion of offset wellbore permitted or completed in the same formation: 212 Feet

Distance from Completed Portion of Wellbore to Nearest Unit Boundary 912 Feet (Enter 5280 for distance greater than 1 mile.)

Federal or State Unit Name (if appl): _____ Unit Number: _____

SPACING & FORMATIONS COMMENTS

PROPOSED SPACING UNIT:
03N67W SEC 22: E2E2
03N67W SEC 23: W2W2
03N67W SEC 26: W2W2
03N67W SEC 27: E2E2
03N67W SEC 34: NENE
03N67W SEC 35: NWNW

OBJECTIVE FORMATIONS

Objective Formation(s)	Formation Code	Spacing Order Number(s)	Unit Acreage Assigned to Well	Unit Configuration (N/2, SE/4, etc.)
CODELL	CODL		720	GWA

DRILLING PROGRAM

Proposed Total Measured Depth: 17186 Feet

Distance from the proposed wellbore to nearest existing or proposed wellbore belonging to another operator, including plugged wells:

Enter distance if less than or equal to 1,500 feet: 530 Feet No well belonging to another operator within 1,500 feet

Will a closed-loop drilling system be used? Yes

Is H₂S gas reasonably expected to be encountered during drilling operations at concentrations greater than or equal to 100 ppm? No (If Yes, attach an H₂S Drilling Operations Plan)

Will salt sections be encountered during drilling? No

Will salt based (>15,000 ppm Cl) drilling fluids be used? No

Will oil based drilling fluids be used? Yes

BOP Equipment Type: Annular Preventor Double Ram Rotating Head None

GROUNDWATER BASELINE SAMPLING AND MONITORING AND WATER WELL SAMPLING

Water well sampling required per Rule 318A

DRILLING WASTE MANAGEMENT PROGRAM

Drilling Fluids Disposal: OFFSITE Drilling Fluids Disposal Methods: Commercial Disposal

Cuttings Disposal: OFFSITE Cuttings Disposal Method: Commercial Disposal

Other Disposal Description:

Please see Comments section. Disposal description will not fit in space provided.

Beneficial reuse or land application plan submitted? Yes

Reuse Facility ID: _____ or Document Number: _____

CASING PROGRAM

Casing Type	Size of Hole	Size of Casing	Wt/Ft	Csg/Liner Top	Setting Depth	Sacks Cmt	Cmt Btm	Cmt Top
CONDUCTOR	26	16	42.1	0	40	30	40	0
SURF	13+1/2	9+5/8	36	0	1500	590	1500	0
1ST	7+7/8	5+1/2	17	0	17176	2034	17176	

Conductor Casing is NOT planned

DESIGNATED SETBACK LOCATION EXCEPTIONS

Check all that apply:

- Rule 604.a.(1)A. Exception Zone (within 500' of Building Unit)
- Rule 604.b.(1)A. Exception Location (existing or approved Oil & Gas Location now within a Designated Setback as a result of Rule 604.a.)
- Rule 604.b.(1)B. Exception Location (existing or approved Oil & Gas Location is within a Designated Setback due to Building Unit construction after Location approval)
- Rule 604.b.(2) Exception Location (SUA or site-specific development plan executed on or before August 1, 2013)
- Rule 604.b.(3) Exception Location (Building Units constructed after August 1, 2013 within setback per an SUA or site-specific development plan)

GREATER WATTENBERG AREA LOCATION EXCEPTIONS

Check all that apply:

- Rule 318A.a. Exception Location (GWA Windows).
- Rule 318A.c. Exception Location (GWA Twinning).

RULE 502.b VARIANCE REQUEST

Rule 502.b. Variance Request from COGCC Rule or Spacing Order Number _____

OTHER LOCATION EXCEPTIONS

Check all that apply:

Rule 318.c. Exception Location from Rule or Spacing Order Number _____

Rule 603.a.(2) Exception Location (Property Line Setback).

ALL exceptions and variances require attached Request Letter(s). Refer to applicable rule for additional required attachments (e.g. waivers, certifications, SUAs).

OPERATOR COMMENTS AND SUBMITTAL

Comments

Drilling fluids disposal: KMG will reuse water-based drilling fluids to the maximum extent possible, at which point they will either be land applied or taken to a licensed, commercial disposal site; the decision will be based upon laboratory analysis of fluids. KMG will reuse oil-based drilling fluids to the maximum extent possible, at which point they will be returned to the fluids manufacturer for reconditioning or disposal at a licensed, commercial disposal site.

Cuttings disposal: Water-based cuttings will be disposed of using a Centralized E&P Waste Management facility or a private spread field, depending on what is feasible at the time of drilling. Oil-based cuttings will be disposed of offsite and at a licensed, commercial disposal site.

The following well(s) belong to Kerr-McGee and are not within 150' of KMG's proposed well, however may appear to be less than 150' in 2D view:
BBKB 36N-35HZ - ~5,700' vertical
BBKB 36E-35HZ - ~2,600' vertical

This application is in a Comprehensive Drilling Plan No CDP #: _____

Location ID: _____

Is this application being submitted with an Oil and Gas Location Assessment application? Yes No

I hereby certify all statements made in this form are, to the best of my knowledge, true, correct, and complete.

Signed: _____ Print Name: SHAYELYN MARSHALL

Title: REGULATORY ANALYST Date: _____ Email: DJREGULATORY@ANADARK

Based on the information provided herein, this Application for Permit-to-Drill complies with COGCC Rules and applicable orders and is hereby approved.

COGCC Approved: _____ Director of COGCC Date: _____

Expiration Date: _____

API NUMBER

05

Conditions Of Approval

All representations, stipulations and conditions of approval stated in the Form 2A for this location shall constitute representations, stipulations and conditions of approval for this Form 2 Permit-to-Drill and are enforceable to the same extent as all other representations, stipulations and conditions of approval stated in this Permit-to-Drill.

COA Type

Description

<u>COA Type</u>	<u>Description</u>

Best Management Practices

No	BMP/COA Type	Description
1	Planning	604c.(2).Q. Guy Line Anchors: Guy line anchors will not be used. Base Beams will be used to stabilize the rig and removed after drilling.
2	Drilling/Completion Operations	604c.(2).B. Closed Loop Drilling System: KMG will use a closed loop or "pitless" system for drilling and fluid management and will not construct a reserve pit.
3	Drilling/Completion Operations	604c.(2).C. Green Completions: Temporary above ground polyethylene water pipelines will deliver water to location operations from larger trunk lines to reduce truck traffic and minimize air pollution. Pipeline infrastructure is in place prior to completions operations to ensure saleable gas, once hydrocarbons are cut, is sent directly to sales without flaring during flowback.
4	Drilling/Completion Operations	604c.(2).H. BOPE: Our rigs at a minimum will have a double ram with blind and pipe ram and annular preventer.
5	Drilling/Completion Operations	604c.(2).I. BOPE Testing for Drilling Operations: BOPEs will be tested upon rig-up and, at a minimum, every 30 days.
6	Drilling/Completion Operations	604c.(2).J. BOPE for Well Servicing Operations: Blowout prevention equipment will be used on any servicing operations associated with this well. Backup stabbing valves will be used during any future servicing operations during reverse circulation. Valves shall be pressure tested before each well servicing operation using low-pressure air and high-pressure fluid.
7	Drilling/Completion Operations	604c.(2).K. Pit Level Indicators: All storage tanks used for active drilling operations (used in lieu of pits) contain pit level monitors with Electronic Drilling Recorders (EDR). KMG uses EDRs with pit level monitor(s) and alarm(s) for production rigs. Basic level gauges are used on tanks utilized for the surface rig.
8	Drilling/Completion Operations	604c.(2).L. Drill Stem Tests: No drill stem tests are planned and none will be performed without prior approval from the Director.
9	Drilling/Completion Operations	803. Lighting: To the extent practicable, site lighting shall be shielded and directed downward and inward toward operations to avoid glare on public roads and nearby Building Units.
10	Drilling/Completion Operations	Kerr-McGee acknowledges and will comply with the COGCC Policy for Bradenhead Monitoring during Hydraulic Fracturing Treatments in the Greater Wattenberg Area dated May 29, 2012.
11	Drilling/Completion Operations	Anti-Collision: Kerr-McGee will perform an anti-collision evaluation of all active (producing, shut in, or temporarily abandoned) offset wellbores that have the potential of being within one hundred fifty (150) feet of a proposed well prior to drilling operations for the proposed well. Notice shall be given to all offset operators within one hundred fifty (150) feet prior to drilling.
12	Drilling/Completion Operations	317.p Logging Program: One of the first wells drilled on the pad will be logged with Cased-hole Pulsed Neutron Log with Gamma Ray Log the kick-off point into the surface casing. All wells on the pad will have a cement bond log with gamma-ray run on production casing (or on intermediate casing if production liner is run) into the surface casing. The horizontal portion of every well will be logged with a measured-while-drilling gamma-ray log. The Form 5, Completion Report, for each well on the pad will list all logs run in that well and have those logs attached. The Form 5 for each well shall clearly state "No open-hole logs were run" and shall reference the Rule 317.p Exception granted for the well.

Total: 12 comment(s)

Attachment Check List


Att Doc Num	Name
401157268	WELL LOCATION PLAT
401157270	PROPOSED SPACING UNIT
401157271	DEVIATED DRILLING PLAN
401157272	DIRECTIONAL DATA
401157278	EXCEPTION LOC REQUEST
401157282	OPEN HOLE LOGGING EXCEPTION
401158509	EXCEPTION LOC WAIVERS
401160680	OFFSET WELL EVALUATION

Total Attach: 8 Files

General Comments

User Group	Comment	Comment Date
		Stamp Upon Approval

Total: 0 comment(s)

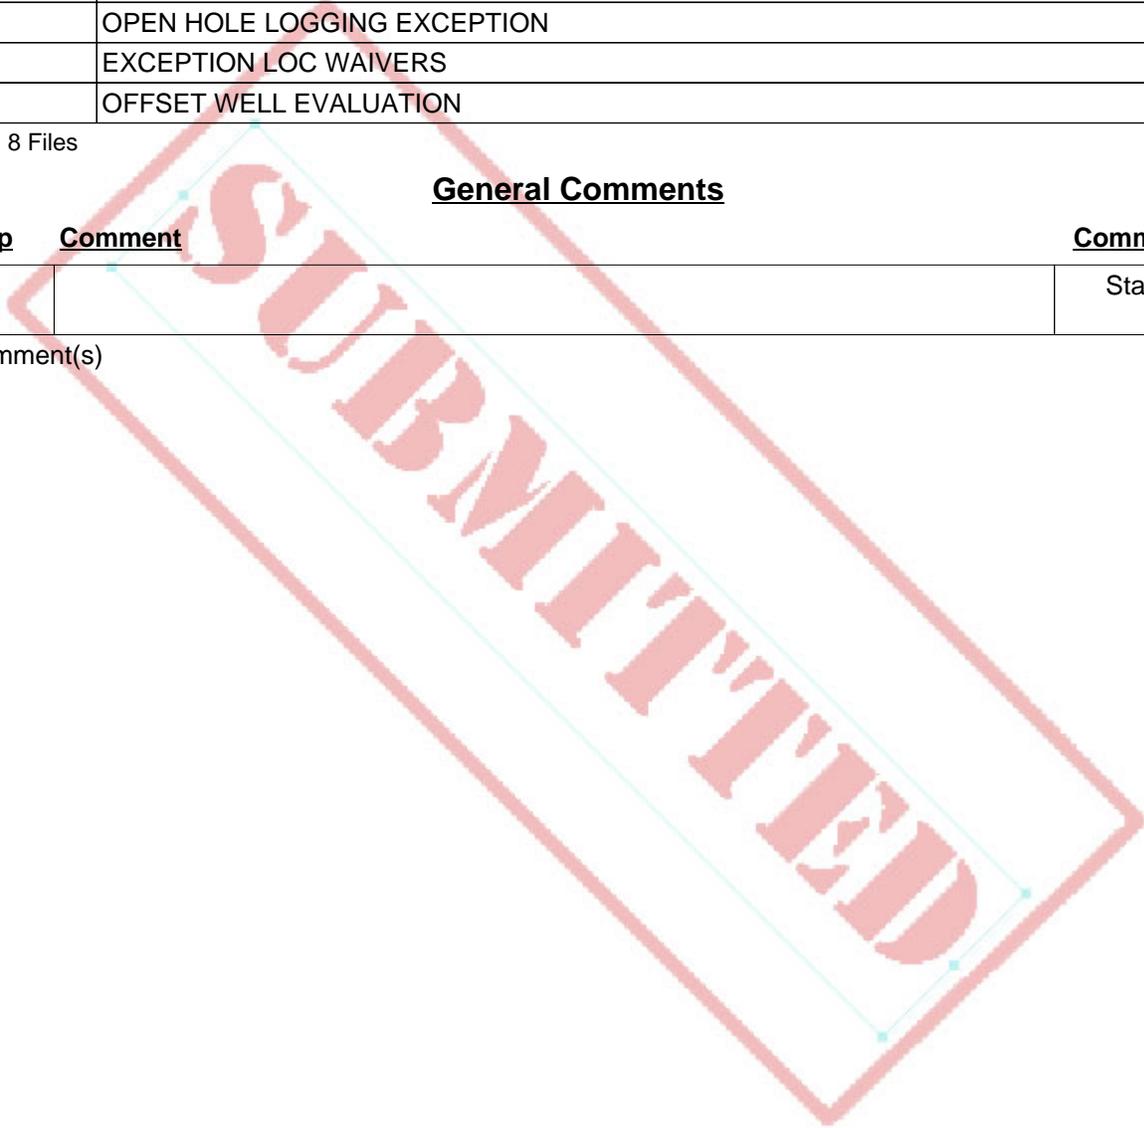

Public Comments

No public comments were received on this application during the comment period.

