

ESTIMATED EARTHWORK QUANTITIES (cy)				
ITEM	CUT	FILL	TOPSOIL	EXCESS
PAD	3910	7000	3420	-6510
PIT	10200			10200
TOTALS	14110	7000	3420	3690

- *NOTE:
- 1.) Topsoil Volume Based on 12" Soil Depth.
 - 2.) 10% Swell Factor Applied to Earthwork Cut Volume.
 - 3.) Mulch Gambel Oak.
 - 3.) Total Disturbed Area = ±4.13 ac.

Revised: 4/20/17

136 East Third Street
Rifle, Colorado 81650
Ph. (970) 625-2720
Fax (970) 625-2773



SCALE: 1" = 80'
DATE: 4/6/17
PLAT: 2 of 8
PROJECT: Valley
DFT: cs


Construction Plan Prepared for:



TEP Rocky Mountain LLC

TR 32-28-597 Drill Pad - Plat 2
CONSTRUCTION LAYOUT

WELLS

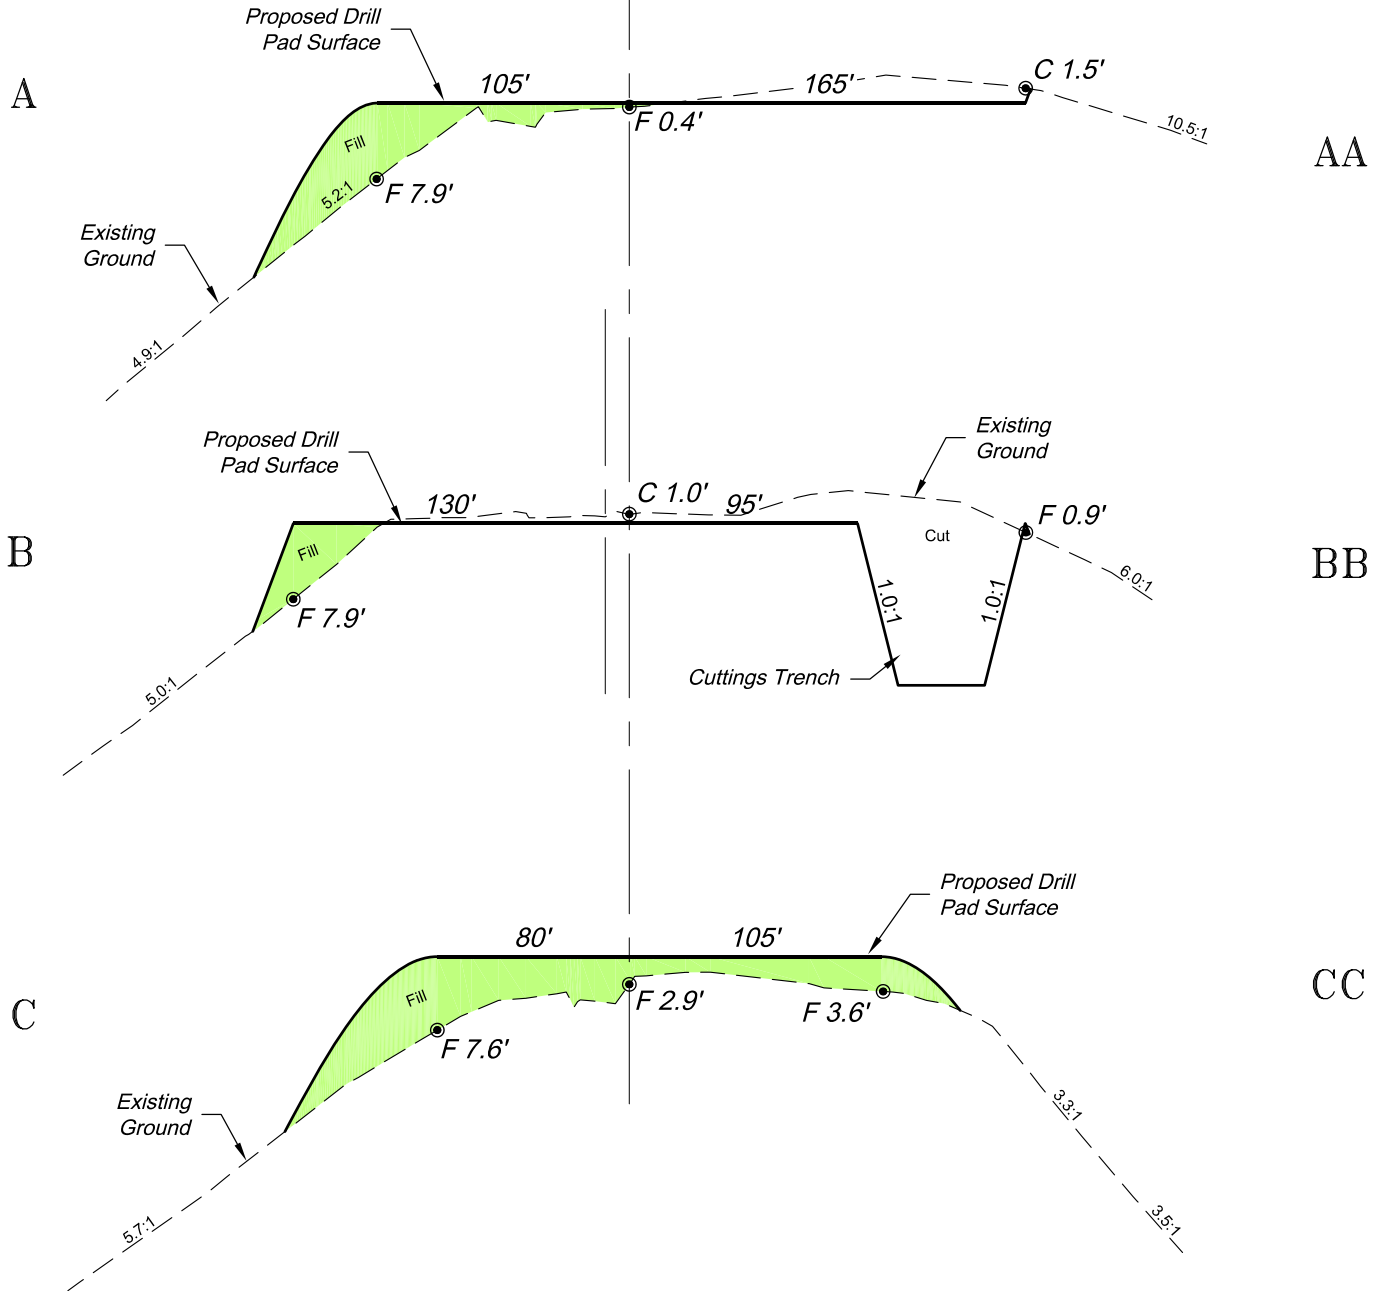

SCALE: Horiz.: 1" = 80'
Vert.: 1" = 20'

*NOTE:
CUT SLOPES: 1.5:1
FILL SLOPES: 1.5:1,
UNLESS OTHERWISE NOTED.

Revised: 4/18/17

136 East Third Street
Rifle, Colorado 81650
Ph. (970) 625-2720
Fax (970) 625-2773



SCALE: As Noted
DATE: 4/6/17
PLAT: 3 of 8
PROJECT: Valley
DFT: cs

Construction Plan Prepared for:



TEP Rocky Mountain LLC

TR 32-28-597 Drill Pad - Plat 3
CONSTRUCTION LAYOUT
CROSS SECTIONS