

OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

NOTICE OF INTENTION TO DRILL

SEP - 9 1958

INSTRUCTIONS:

A notice of intention to drill a well shall be filed in duplicate on all Federal and Patented lands, and in triplicate on all State lands. Do not begin operations until approved copy has been received. It is mandatory that the proposed location comply with all rules and regulations of the Commission. Locate well on section grid in proper location, and indicate extent of lease. Unless operations are commenced within 180 days after the date of approval hereof, this approval to drill will become null and void.

Name of Operator C. T. McLaughlin Phone No. Hillcrest 3-6311
Address Diamond M Building City Snyder State Texas

How is liability secured: Well Bond (Attached) ☐; Blanket Bond ☒ Waiver ☒


(Check one) ////PATENTED/011/061

Lease Name Jones
Smith-Government

Well No. 1

Field Name Wilcat ☒

County Weld ☒

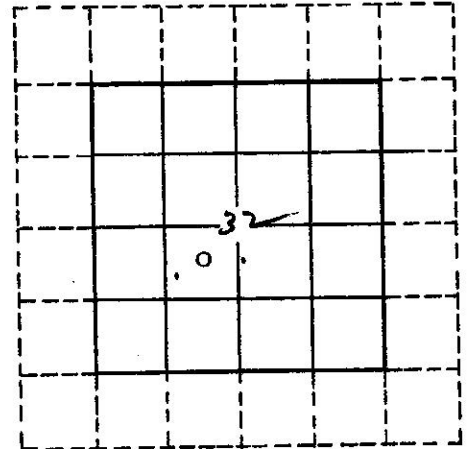

Location C NE 1/4 SW 1/4 Section 32 Township 9 N Range 62 W Meridian 6th
(quarter quarter)
1980 feet from S Section line and 1980 feet from W Section line
N or S E or W

The well is located on: Patented land ☐ State land ☐ Federal land ☒

The well is located within a spaced area: Yes ☐ No ☒

Distance from proposed location to nearest property or lease line 660 feet.
Distance from proposed location to nearest drilling unit line 660 feet.

Objectives: "J" Sand Formation Depth 7500' Estimate; Skull Creek Formation Depth 7600' Estimate

Proposed length of surface casing 200' feet.

REMARKS:

Drill 12 1/4" hole to 200' - set approximately 200' 8 5/8" 24# J-55 Surface casing. Cement to surface with 150 sacks of cement. Drill 7 7/8" hole to approximately 7600' or top of Skull Creek Formation. Test "J" Sand at approximately 7500'. If productive, set 7600' - 5 1/2" - 14#, 15.5# & 17# J-55 Casing. Cement with 200 sacks of cement.

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:

Date SEP - 9 1958

A. J. Persin
Director

Company C. T. McLaughlin Date Sept. 4, 1958

Address 441 Continental Oil Bldg. Phone No. KE 4-3035

By Lee A. Adams Signature Title Agent