


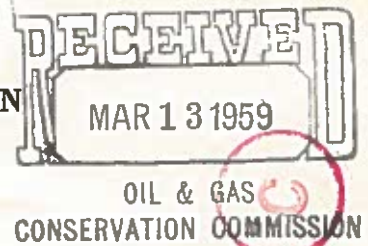

00217927

OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator The British-American Oil Producing Co Field NW Graylin ☒ Wildcat
Lease Name MORISON Well No. 5 County Logan
Location Lot #1 Section 1 Township 8N Range 54W Meridian 6PM
(Quarter Quarter)
330 feet from South Section line and 330 feet from West Section line of Lot #1
N or S E or W

TOTAL DEPTH 5200DATE OF PLUGGING 3-10-59

DETAILS OF WORK

Set rock and cement bridge at 5095-5012, shot casing off at 4301 and pulled leaving 898' of 5½", 15.5# casing in hole from 4301 to 5199, filled hole with heavy mud with a 10 sax cement plug in bottom of surface casing at 219-195, 10 sax cement plug in top of surface casing from 20' to GL, erected dry hole marker, levelled and abandoned location.

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	<input checked="" type="checkbox"/>
JJD	<input checked="" type="checkbox"/>
FILE	

P7A oil well
4- approved
3/11/59

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date MAR 13 1959

Director

Company British-American Oil Date 3-11-59Address Box 180, Denver, Colo Phone No. AC 2 9401By Harold H. Rogers Title Dist Supt
(Signature)