



SRC ENERGY

Operator: SRC Energy
Well Name: SEGL 21-24X
Legal: SENW, Section 24, Township 5N, Range 66W
Location: Weld County, CO
API: 05-123-23843

Deepest Water Well
Within 1 Mile = 250'





Wellbore History

Spud Date: 1/05/2007
Surf Csg: 8.625", 24# @ 907' – 370 sx
Prod Csg: 4.5", 11.6# @ 7644' – 625 sx
TOC: 2900' (CBL)
Perfs: NB-CD: 7212' – 7497'


P&A Procedure

Set CIBP @ 7137'
Set 15 sx on top of CIBP (152' plug)
Perf @ 2500'
Set CICR @ 2400'
Circ 85 sx through CICR
Set 10 sx on top of CICR (100' plug)
Cut Casing @ 1007'
Pmp 405 sx @ 1057' to surface

Key

-  Existing Cement Coverage
-  CICR
-  Cement Pumped
-  CIBP

Current

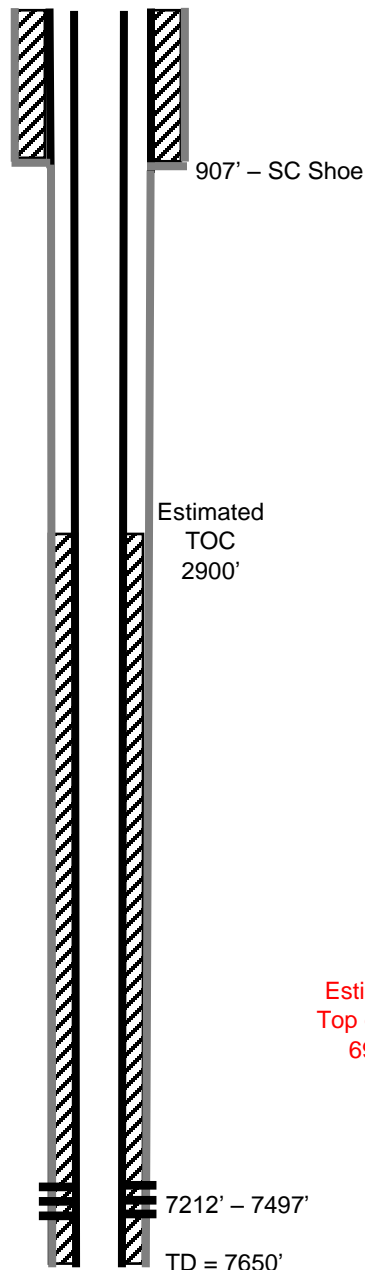

Proposed

