


23-20-58W

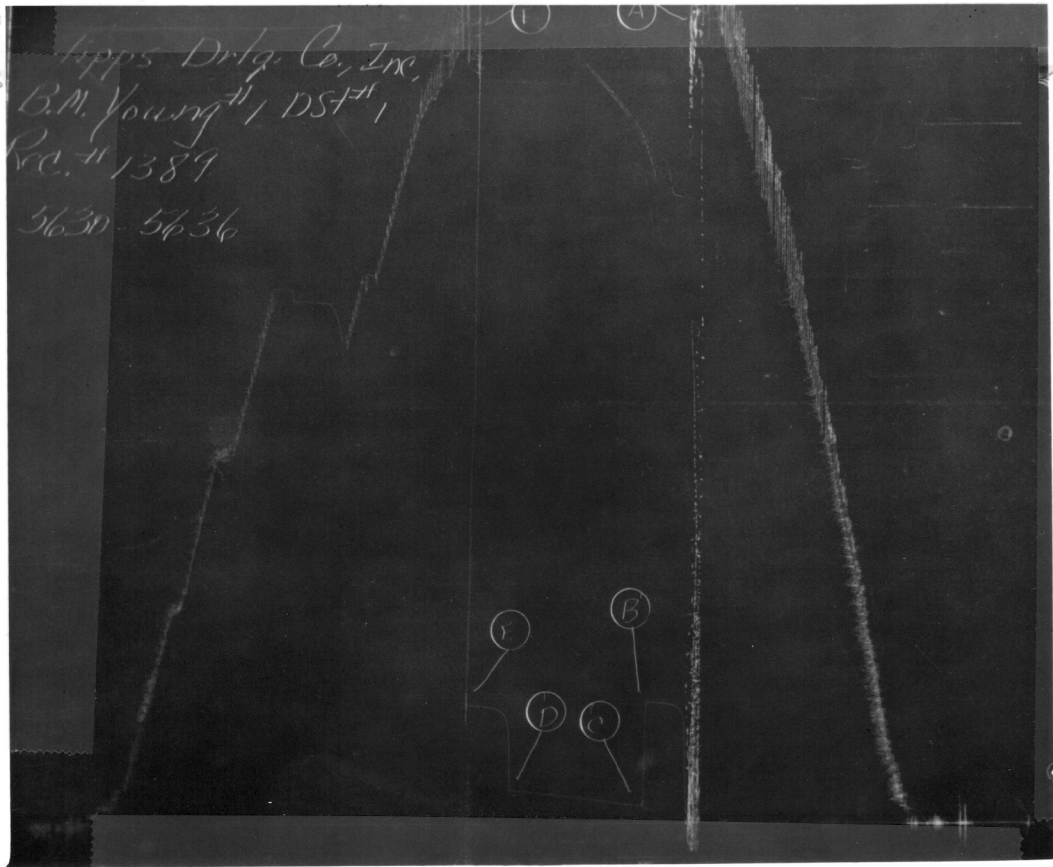

Company Operating Well		
Tipps Drlg. Co., Inc.		
Address 914 Patterson Bldg. Denver 2, Colorado		
Contractor and Rig No.		
Tipps Drlg. Co. Rig # 2		
Well Name and No.		
B. M. Young # 1		
County	State	
Morgan	Colorado	
Sec.	Twn.	Rng.
23	2 N	58 W
Ticket	DST No.	Tester
6564	1	Byrd
Date of Test and Formation Tested		
4-2-63 "D" Sand		

			RESULTS
Initial Hydrostatic:	A	2995	2998
Final Hydrostatic:	F	2955	2981
Initial Flow:	C	61	62
Final Flow:	D	114	121
Initial Shut-in:	B	420	427
Final Shut-in:	E	405	417
Press. below bottom packer bled to:		1200	1200
			Total Depth ...5646..... Interval tested 5630-5636
			Tool open for ...60 mins..... Initial Shut-in 20 mins Final Shut-in 20 min
			Tool open @ ...12:15... p.m. M Mud Wt. 9.9 Vis. 105
			Did well flow Gas? No
			Did well flow Oil? No
			Did well flow Water? No Witnessed by:
			Was Blow measured? No
			EXTRA EQUIPMENT: Jars? Yes Safety Jt.? Yes R. Sub?
			Extra packers? No No. final copies? 5
			Cost of Test? \$485 Top Choke 1" Bottom Choke 9/16" D. P. Size 4 1/2" X. H
			Recorder No. 1389 Run At 5615 Was this a straddle test? Yes
			Recovery in D. P. 290' of sl/ oil cut water.
			1260' of gas in drill pipe.

REMARKS: Tool open with a fair blow increased to good blow in 15 minutes. Decreased to fair blow at the end of 45 minutes & remained fair throughout test.

Test Conclusive.



RECEIVED
APR 17 1963
OIL & GAS
CONSERVATION COMMISSION