


OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

PLUGGING RECORD



INSTRUCTIONS

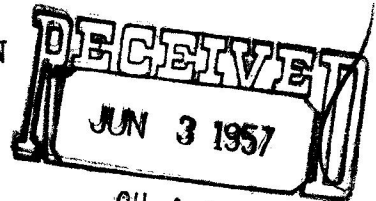

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator The Carter Oil Company Field Allen Wildcat
 Lease Name Government Well No. 1 County Morgan
 Location SW 1/4 SE 1/4 Section 4 Township 2 N. Range 56 W. Meridian 6th PM
 (Quarter Quarter)
587' feet from S Section line and 1948 feet from E Section Line
 N or S E or W

TOTAL DEPTH 5306'DATE OF PLUGGING May 24, 1957

DETAILS OF WORK

Casing Record

8-7/8" 28# H-40 casing set at 166' and cemented with 150 sacks of regular cement with 2% CaCl₂, circulated to surface. No junk was left in hole. No casing was pulled.

Plugging Record

Hole was plugged as follows:

Heavy mud - 5306' to 5228'
 25 sacks cement - 5228'-5142' opposite the "D" sand in and between "D" and "J" sands.
 Heavy mud - 5142'-166'
 20 sacks cement - 166'-106'
 Heavy Mud - 106'-30'
 10 sacks cement 30' to surface.
 Marker pipe erected 4" above ground at the plugged hole location.

AJJ	
DVR	
FJK	
WRS	
HHM	
AH	
JJD	✓
FILE	

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Company The Carter Oil Company Date May 28, 1957

Date

JUN - 3 1957Address P. O. Box 120, Denver, Colo. Phone No. KE 4-4261

Director

By

Roger S. Frazier
(Signature)Western Division
Title Production Mgr.