




VERBAL REQUESTS

NOTICE OF INTENTION TO DRILL \_\_\_\_\_

Bonding Status \_\_\_\_\_

NOTICE OF INTENTION TO ABANDON X

OTHER \_\_\_\_\_

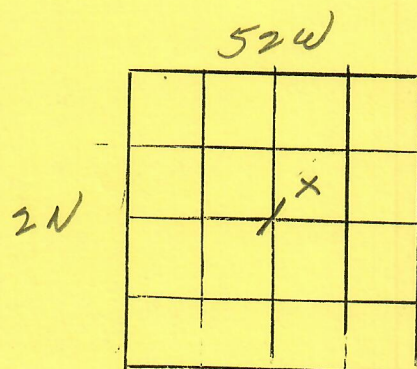

COMPANY P. A. Doherty ADDRESS \_\_\_\_\_

WELL NO. 1 BY Earl Olson PHONE NO. \_\_\_\_\_

LEASE Spotts TITLE Cons. Extension \_\_\_\_\_

COUNTY Wash. FIELD Purdy

Location SWNE Section 1 Township 2N Range 52W Meridian 6<sup>th</sup> Pm  
(Quarter-Quarter)

\_\_\_\_\_ feet from \_\_\_\_\_ Section line and \_\_\_\_\_ feet from \_\_\_\_\_ Section line  
N or S E or W

ESTIMATED DATE OF WORK 10/1/65 ESTIMATED TIME AM

DETAILS OF PLAN OF WORK T. D. 4629 FORMATION J

SURFACE CASING 8 5/8" @ 174'  
4 1/2" csg. @ 4522' K.B. pull  $\pm$  3600'  
rock & cmt. across perfs. at 4472-80  
15 sk. cmt. bott. surf. csg.  
10 " " top " " , weld cap below plow depth.

APPROVED BY H. H. Monell

DATE 10/1/65

W.H.

✓