

US ROCKIES WATTENBERG PLANNING

WELD-NAD83-UTMFT13N

1N-66W-26 BEIERLE 2-26HZ PAD

BEIERLE 26-3HZ

Plan A

Plan: Permit Rev-2

SHL Lat/Long: 40.028609/-104.741241

Survey Program: MWD+IFR

Standard Planning Report

12 August, 2018

Project: WELD-NAD83-UTMFT13N
Site: 1N-66W-26 BEIERLE 2-26HZ PAD
Well: BEIERLE 26-3HZ
Wellbore: Plan A
Design: Permit Rev-2

US ROCKIES WATTENBERG PLANNING

CASING DETAILS

TVD	MD	Size
1500.00	1521.46	9-5/8
7472.00	8012.68	5-1/2

WELL DETAILS: BEIERLE 26-3HZ

GL = 5118'

RKB = 17' @ 5135.00usft (Drilling Rig)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	
3	1298.00	15.72	3.80	1284.90	142.55	9.47	1.50	3.80	-142.54	
4	4098.00	15.72	3.80	3980.17	899.51	59.75	0.00	0.00	-899.42	
5	4884.00	0.00	0.00	4756.35	1006.42	66.85	2.00	180.00	-1006.33	
6	6883.47	0.00	0.00	6755.82	1006.42	66.85	0.00	0.00	-1006.33	
7	8012.68	90.34	179.92	7472.00	286.02	67.89	8.00	179.92	-285.92	
8	12777.42	90.34	179.92	7444.00	-4478.63	74.83	0.00	0.00	4478.73	BEIERLE 26-3HZ_BHL

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude
BEIERLE 26-3HZ_SHL	0.00	0.00	0.00	40.028609	-104.741241
BEIERLE 26-3HZ_BHL	7444.00	-4478.63	74.83	40.016310	-104.740974



FORMATION TOP DETAILS

TVDPPath	MDPath	Formation
1775.00	1807.14	Fox Hills
4327.00	4453.03	Parkman
4811.00	4938.65	Sussex
7225.00	7395.06	Sharon Springs
7240.00	7415.16	Niobrara
7435.00	7777.20	Nio B

SHL
340' FNL
1759' FEL

HEEL
52' FNL
1691' FEL

TOE
470' FSL
1684' FEL

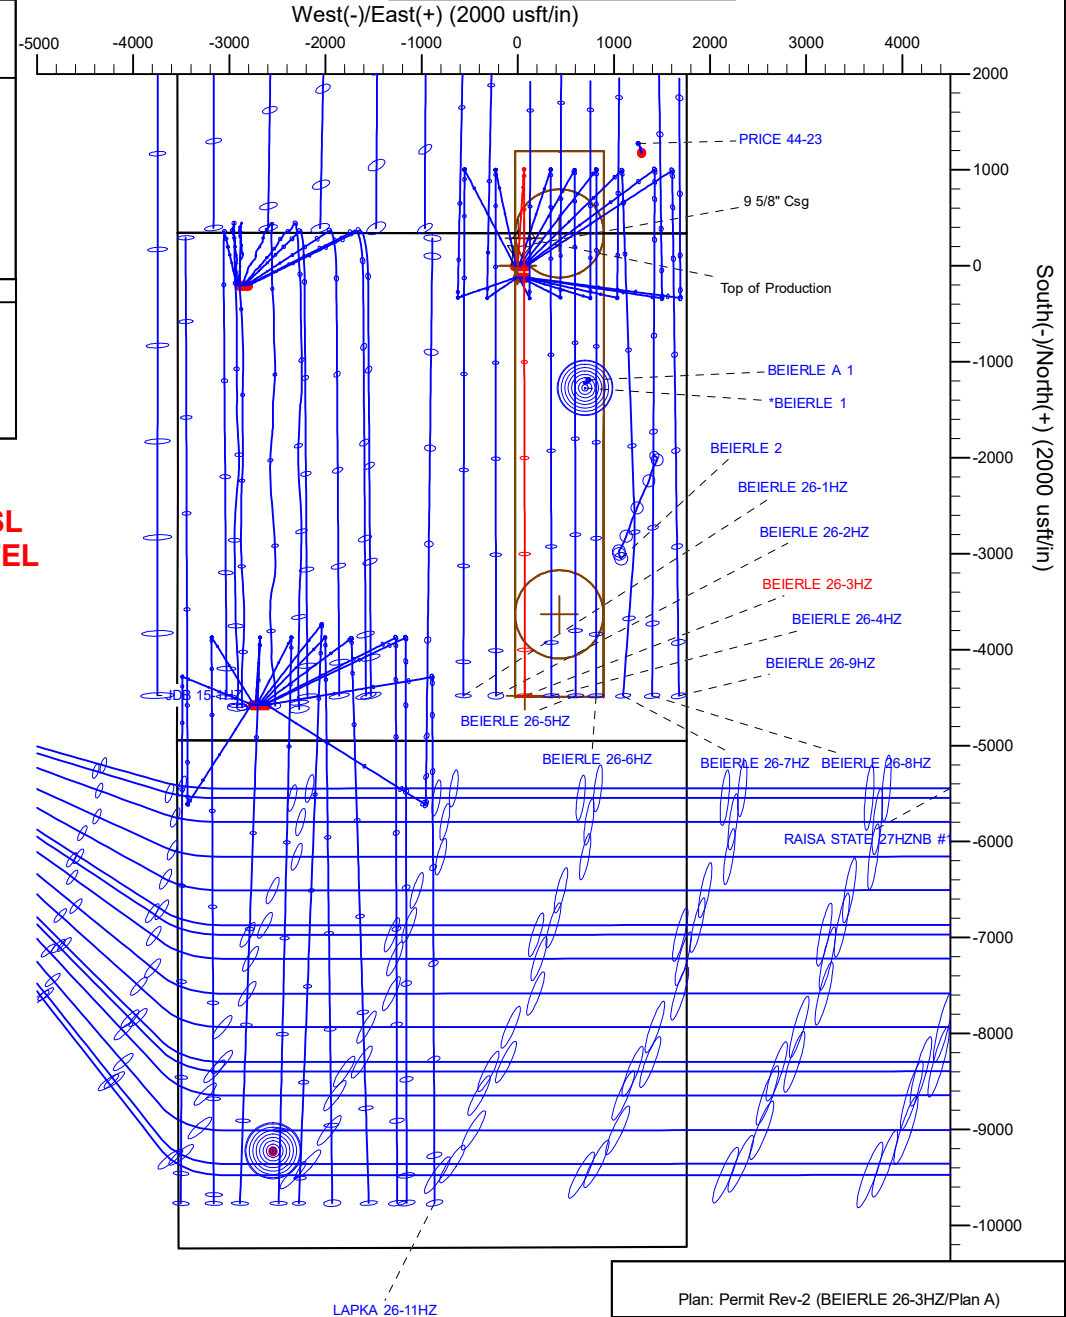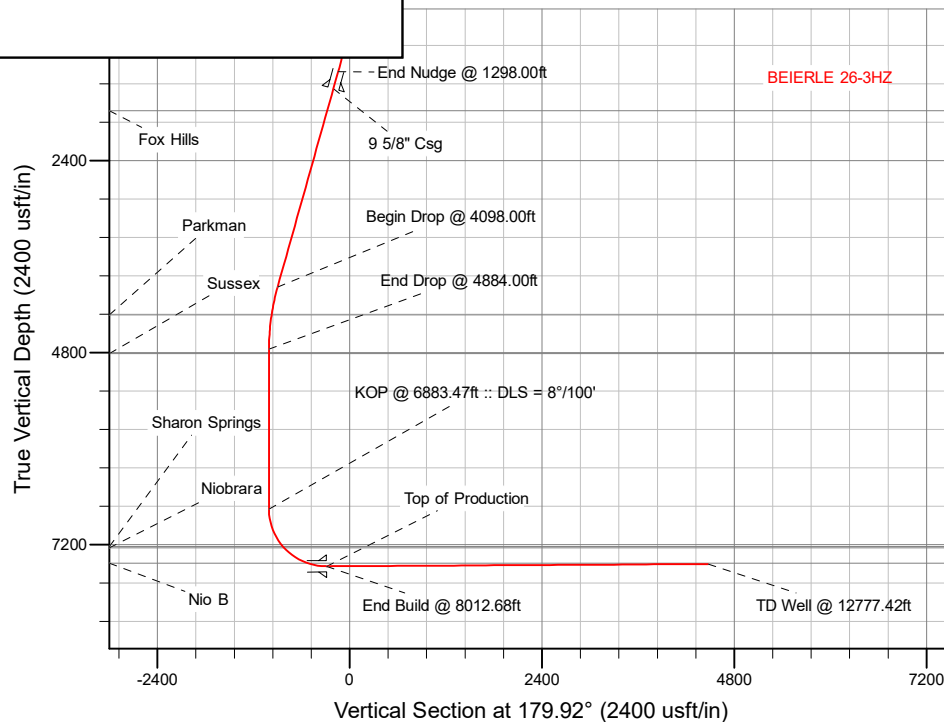

Plan: Permit Rev-2 (BEIERLE 26-3HZ/Plan A)

Date: 8/12/2018

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well BEIERLE 26-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Site:	1N-66W-26 BEIERLE 2-26HZ PAD	North Reference:	True
Well:	BEIERLE 26-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Project	WELD-NAD83-UTMFT13N		
Map System:	Universal Transverse Mercator (US Survey Feet)	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Zone 13N (108 W to 102 W)		

Site	1N-66W-26 BEIERLE 2-26HZ PAD			
Site Position:		Northing:	14,537,256.31 usft	Latitude: 40.028609
From:	Lat/Long	Easting:	1,712,821.93 usft	Longitude: -104.741349
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence: 0.17 °

Well		BEIERLE 26-3HZ				
Well Position	+N/-S	0.00 usft	Northing:	14,537,256.40 usft	Latitude:	40.028609
	+E/-W	30.23 usft	Easting:	1,712,852.16 usft	Longitude:	-104.741241
Position Uncertainty		3.28 usft	Wellhead Elevation:		Ground Level:	5,118.00 usft

Wellbore	Plan A				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	3/24/2018	8.09	66.54	52,111.54656184

Design	Permit Rev-2			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	179.92

Plan Survey Tool Program	Date	8/12/2018		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	1,500.00	Permit Rev-2 (Plan A)	APC_ISCWSA REV 2 MWD+I Fixed:v2:crustal field declinatio
2	1,500.00	12,777.42	Permit Rev-2 (Plan A)	APC_ISCWSA REV 2 MWD+I Fixed:v2:crustal field declinatio

Corporate
Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well BEIERLE 26-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Site:	1N-66W-26 BEIERLE 2-26HZ PAD	North Reference:	True
Well:	BEIERLE 26-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,298.00	15.72	3.80	1,284.90	142.55	9.47	1.50	1.50	0.00	3.80	
4,098.00	15.72	3.80	3,980.17	899.51	59.75	0.00	0.00	0.00	0.00	
4,884.00	0.00	0.00	4,756.35	1,006.42	66.85	2.00	-2.00	0.00	180.00	
6,883.47	0.00	0.00	6,755.82	1,006.42	66.85	0.00	0.00	0.00	0.00	
8,012.68	90.34	179.92	7,472.00	286.02	67.89	8.00	8.00	15.93	179.92	
12,777.42	90.34	179.92	7,444.00	-4,478.63	74.83	0.00	0.00	0.00	0.00	BEIERLE 26-3HZ_BH

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well BEIERLE 26-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Site:	1N-66W-26 BEIERLE 2-26HZ PAD	North Reference:	True
Well:	BEIERLE 26-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00
Begin Nudge @ 250.00ft									
300.00	0.75	3.80	300.00	0.33	0.02	-0.33	1.50	1.50	0.00
400.00	2.25	3.80	399.96	2.94	0.20	-2.94	1.50	1.50	0.00
500.00	3.75	3.80	499.82	8.16	0.54	-8.16	1.50	1.50	0.00
600.00	5.25	3.80	599.51	15.99	1.06	-15.99	1.50	1.50	0.00
700.00	6.75	3.80	698.96	26.42	1.75	-26.42	1.50	1.50	0.00
800.00	8.25	3.80	798.10	39.44	2.62	-39.44	1.50	1.50	0.00
900.00	9.75	3.80	896.87	55.05	3.66	-55.05	1.50	1.50	0.00
1,000.00	11.25	3.80	995.19	73.23	4.86	-73.23	1.50	1.50	0.00
1,100.00	12.75	3.80	1,093.00	93.98	6.24	-93.97	1.50	1.50	0.00
1,200.00	14.25	3.80	1,190.24	117.27	7.79	-117.26	1.50	1.50	0.00
1,298.00	15.72	3.80	1,284.90	142.55	9.47	-142.54	1.50	1.50	0.00
End Nudge @ 1298.00ft									
1,300.00	15.72	3.80	1,286.83	143.09	9.50	-143.08	0.00	0.00	0.00
1,400.00	15.72	3.80	1,383.09	170.13	11.30	-170.11	0.00	0.00	0.00
1,500.00	15.72	3.80	1,479.35	197.16	13.10	-197.14	0.00	0.00	0.00
1,521.46	15.72	3.80	1,500.00	202.96	13.48	-202.94	0.00	0.00	0.00
9 5/8" Csg									
1,600.00	15.72	3.80	1,575.61	224.20	14.89	-224.18	0.00	0.00	0.00
1,700.00	15.72	3.80	1,671.87	251.23	16.69	-251.21	0.00	0.00	0.00
1,800.00	15.72	3.80	1,768.12	278.27	18.48	-278.24	0.00	0.00	0.00
1,807.14	15.72	3.80	1,775.00	280.20	18.61	-280.17	0.00	0.00	0.00
Fox Hills									
1,900.00	15.72	3.80	1,864.38	305.30	20.28	-305.27	0.00	0.00	0.00
2,000.00	15.72	3.80	1,960.64	332.33	22.07	-332.30	0.00	0.00	0.00
2,100.00	15.72	3.80	2,056.90	359.37	23.87	-359.33	0.00	0.00	0.00
2,200.00	15.72	3.80	2,153.16	386.40	25.66	-386.37	0.00	0.00	0.00
2,300.00	15.72	3.80	2,249.42	413.44	27.46	-413.40	0.00	0.00	0.00
2,400.00	15.72	3.80	2,345.68	440.47	29.26	-440.43	0.00	0.00	0.00
2,500.00	15.72	3.80	2,441.94	467.50	31.05	-467.46	0.00	0.00	0.00
2,600.00	15.72	3.80	2,538.20	494.54	32.85	-494.49	0.00	0.00	0.00
2,700.00	15.72	3.80	2,634.46	521.57	34.64	-521.52	0.00	0.00	0.00
2,800.00	15.72	3.80	2,730.72	548.61	36.44	-548.55	0.00	0.00	0.00
2,900.00	15.72	3.80	2,826.98	575.64	38.23	-575.59	0.00	0.00	0.00
3,000.00	15.72	3.80	2,923.24	602.67	40.03	-602.62	0.00	0.00	0.00
3,100.00	15.72	3.80	3,019.50	629.71	41.83	-629.65	0.00	0.00	0.00
3,200.00	15.72	3.80	3,115.76	656.74	43.62	-656.68	0.00	0.00	0.00
3,300.00	15.72	3.80	3,212.02	683.78	45.42	-683.71	0.00	0.00	0.00
3,400.00	15.72	3.80	3,308.28	710.81	47.21	-710.74	0.00	0.00	0.00
3,500.00	15.72	3.80	3,404.54	737.84	49.01	-737.78	0.00	0.00	0.00
3,600.00	15.72	3.80	3,500.80	764.88	50.80	-764.81	0.00	0.00	0.00
3,700.00	15.72	3.80	3,597.06	791.91	52.60	-791.84	0.00	0.00	0.00
3,800.00	15.72	3.80	3,693.32	818.95	54.39	-818.87	0.00	0.00	0.00
3,900.00	15.72	3.80	3,789.58	845.98	56.19	-845.90	0.00	0.00	0.00
4,000.00	15.72	3.80	3,885.84	873.01	57.99	-872.93	0.00	0.00	0.00
4,098.00	15.72	3.80	3,980.17	899.51	59.75	-899.42	0.00	0.00	0.00
Begin Drop @ 4098.00ft									
4,100.00	15.68	3.80	3,982.10	900.05	59.78	-899.96	2.00	-2.00	0.00
4,200.00	13.68	3.80	4,078.83	925.33	61.46	-925.25	2.00	-2.00	0.00
4,300.00	11.68	3.80	4,176.39	947.23	62.92	-947.15	2.00	-2.00	0.00

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well BEIERLE 26-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Site:	1N-66W-26 BEIERLE 2-26HZ PAD	North Reference:	True
Well:	BEIERLE 26-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Planned Survey

Measured			Vertical			Vertical	Dogleg	Build	Turn
Depth	Inclination	Azimuth	Depth	+N/-S	+E/-W	Section	Rate	Rate	Rate
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)
4,400.00	9.68	3.80	4,274.65	965.73	64.14	-965.63	2.00	-2.00	0.00
4,453.03	8.62	3.80	4,327.00	974.14	64.70	-974.05	2.00	-2.00	0.00
Parkman									
4,500.00	7.68	3.80	4,373.50	980.78	65.14	-980.69	2.00	-2.00	0.00
4,600.00	5.68	3.80	4,472.81	992.39	65.91	-992.30	2.00	-2.00	0.00
4,700.00	3.68	3.80	4,572.48	1,000.53	66.46	-1,000.44	2.00	-2.00	0.00
4,800.00	1.68	3.80	4,672.36	1,005.20	66.76	-1,005.10	2.00	-2.00	0.00
4,884.00	0.00	0.00	4,756.35	1,006.42	66.85	-1,006.33	2.00	-2.00	0.00
End Drop @ 4884.00ft									
4,900.00	0.00	0.00	4,772.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
4,938.65	0.00	0.00	4,811.00	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
Sussex									
5,000.00	0.00	0.00	4,872.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
5,100.00	0.00	0.00	4,972.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
5,200.00	0.00	0.00	5,072.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
5,300.00	0.00	0.00	5,172.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
5,400.00	0.00	0.00	5,272.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
5,500.00	0.00	0.00	5,372.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
5,600.00	0.00	0.00	5,472.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
5,700.00	0.00	0.00	5,572.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
5,800.00	0.00	0.00	5,672.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
5,900.00	0.00	0.00	5,772.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
6,000.00	0.00	0.00	5,872.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
6,100.00	0.00	0.00	5,972.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
6,200.00	0.00	0.00	6,072.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
6,300.00	0.00	0.00	6,172.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
6,400.00	0.00	0.00	6,272.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
6,500.00	0.00	0.00	6,372.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
6,600.00	0.00	0.00	6,472.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
6,700.00	0.00	0.00	6,572.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
6,800.00	0.00	0.00	6,672.35	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
6,883.47	0.00	0.00	6,755.82	1,006.42	66.85	-1,006.33	0.00	0.00	0.00
KOP @ 6883.47ft :: DLS = 8"/100'									
6,900.00	1.32	179.92	6,772.35	1,006.23	66.85	-1,006.14	8.00	8.00	0.00
7,000.00	9.32	179.92	6,871.84	996.96	66.86	-996.87	8.00	8.00	0.00
7,100.00	17.32	179.92	6,969.07	973.94	66.89	-973.85	8.00	8.00	0.00
7,200.00	25.32	179.92	7,062.14	937.61	66.95	-937.51	8.00	8.00	0.00
7,300.00	33.32	179.92	7,149.26	888.68	67.02	-888.58	8.00	8.00	0.00
7,395.06	40.93	179.92	7,225.00	831.34	67.10	-831.25	8.00	8.00	0.00
Sharon Springs									
7,400.00	41.32	179.92	7,228.72	828.10	67.11	-828.00	8.00	8.00	0.00
7,415.16	42.54	179.92	7,240.00	817.96	67.12	-817.87	8.00	8.00	0.00
Niobrara									
7,500.00	49.32	179.92	7,298.98	757.05	67.21	-756.95	8.00	8.00	0.00
7,600.00	57.32	179.92	7,358.66	676.91	67.33	-676.82	8.00	8.00	0.00
7,700.00	65.32	179.92	7,406.61	589.25	67.45	-589.15	8.00	8.00	0.00
7,777.20	71.50	179.92	7,435.00	517.50	67.56	-517.40	8.00	8.00	0.00
Nio B									
7,800.00	73.32	179.92	7,441.89	495.77	67.59	-495.67	8.00	8.00	0.00
7,900.00	81.32	179.92	7,463.82	398.28	67.73	-398.19	8.00	8.00	0.00
8,000.00	89.32	179.92	7,471.97	298.70	67.88	-298.60	8.00	8.00	0.00
8,012.68	90.34	179.92	7,472.00	286.02	67.89	-285.92	8.00	8.00	0.00
End Build @ 8012.68ft - Top of Production									

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well BEIERLE 26-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Site:	1N-66W-26 BEIERLE 2-26HZ PAD	North Reference:	True
Well:	BEIERLE 26-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,100.00	90.34	179.92	7,471.49	198.70	68.02	-198.60	0.00	0.00	0.00
8,200.00	90.34	179.92	7,470.90	98.70	68.17	-98.61	0.00	0.00	0.00
8,300.00	90.34	179.92	7,470.32	-1.30	68.31	1.39	0.00	0.00	0.00
8,400.00	90.34	179.92	7,469.73	-101.30	68.46	101.39	0.00	0.00	0.00
8,500.00	90.34	179.92	7,469.14	-201.29	68.60	201.39	0.00	0.00	0.00
8,600.00	90.34	179.92	7,468.55	-301.29	68.75	301.39	0.00	0.00	0.00
8,700.00	90.34	179.92	7,467.96	-401.29	68.90	401.39	0.00	0.00	0.00
8,800.00	90.34	179.92	7,467.38	-501.29	69.04	501.38	0.00	0.00	0.00
8,900.00	90.34	179.92	7,466.79	-601.29	69.19	601.38	0.00	0.00	0.00
9,000.00	90.34	179.92	7,466.20	-701.28	69.33	701.38	0.00	0.00	0.00
9,100.00	90.34	179.92	7,465.61	-801.28	69.48	801.38	0.00	0.00	0.00
9,200.00	90.34	179.92	7,465.03	-901.28	69.62	901.38	0.00	0.00	0.00
9,300.00	90.34	179.92	7,464.44	-1,001.28	69.77	1,001.38	0.00	0.00	0.00
9,400.00	90.34	179.92	7,463.85	-1,101.28	69.91	1,101.37	0.00	0.00	0.00
9,500.00	90.34	179.92	7,463.26	-1,201.28	70.06	1,201.37	0.00	0.00	0.00
9,600.00	90.34	179.92	7,462.67	-1,301.27	70.20	1,301.37	0.00	0.00	0.00
9,700.00	90.34	179.92	7,462.09	-1,401.27	70.35	1,401.37	0.00	0.00	0.00
9,800.00	90.34	179.92	7,461.50	-1,501.27	70.50	1,501.37	0.00	0.00	0.00
9,900.00	90.34	179.92	7,460.91	-1,601.27	70.64	1,601.37	0.00	0.00	0.00
10,000.00	90.34	179.92	7,460.32	-1,701.27	70.79	1,701.36	0.00	0.00	0.00
10,100.00	90.34	179.92	7,459.74	-1,801.26	70.93	1,801.36	0.00	0.00	0.00
10,200.00	90.34	179.92	7,459.15	-1,901.26	71.08	1,901.36	0.00	0.00	0.00
10,300.00	90.34	179.92	7,458.56	-2,001.26	71.22	2,001.36	0.00	0.00	0.00
10,400.00	90.34	179.92	7,457.97	-2,101.26	71.37	2,101.36	0.00	0.00	0.00
10,500.00	90.34	179.92	7,457.39	-2,201.26	71.51	2,201.35	0.00	0.00	0.00
10,600.00	90.34	179.92	7,456.80	-2,301.26	71.66	2,301.35	0.00	0.00	0.00
10,700.00	90.34	179.92	7,456.21	-2,401.25	71.81	2,401.35	0.00	0.00	0.00
10,800.00	90.34	179.92	7,455.62	-2,501.25	71.95	2,501.35	0.00	0.00	0.00
10,900.00	90.34	179.92	7,455.03	-2,601.25	72.10	2,601.35	0.00	0.00	0.00
11,000.00	90.34	179.92	7,454.45	-2,701.25	72.24	2,701.35	0.00	0.00	0.00
11,100.00	90.34	179.92	7,453.86	-2,801.25	72.39	2,801.34	0.00	0.00	0.00
11,200.00	90.34	179.92	7,453.27	-2,901.24	72.53	2,901.34	0.00	0.00	0.00
11,300.00	90.34	179.92	7,452.68	-3,001.24	72.68	3,001.34	0.00	0.00	0.00
11,400.00	90.34	179.92	7,452.10	-3,101.24	72.82	3,101.34	0.00	0.00	0.00
11,500.00	90.34	179.92	7,451.51	-3,201.24	72.97	3,201.34	0.00	0.00	0.00
11,600.00	90.34	179.92	7,450.92	-3,301.24	73.12	3,301.34	0.00	0.00	0.00
11,700.00	90.34	179.92	7,450.33	-3,401.24	73.26	3,401.33	0.00	0.00	0.00
11,800.00	90.34	179.92	7,449.74	-3,501.23	73.41	3,501.33	0.00	0.00	0.00
11,900.00	90.34	179.92	7,449.16	-3,601.23	73.55	3,601.33	0.00	0.00	0.00
12,000.00	90.34	179.92	7,448.57	-3,701.23	73.70	3,701.33	0.00	0.00	0.00
12,100.00	90.34	179.92	7,447.98	-3,801.23	73.84	3,801.33	0.00	0.00	0.00
12,200.00	90.34	179.92	7,447.39	-3,901.23	73.99	3,901.33	0.00	0.00	0.00
12,300.00	90.34	179.92	7,446.81	-4,001.22	74.13	4,001.32	0.00	0.00	0.00
12,400.00	90.34	179.92	7,446.22	-4,101.22	74.28	4,101.32	0.00	0.00	0.00
12,500.00	90.34	179.92	7,445.63	-4,201.22	74.43	4,201.32	0.00	0.00	0.00
12,600.00	90.34	179.92	7,445.04	-4,301.22	74.57	4,301.32	0.00	0.00	0.00
12,700.00	90.34	179.92	7,444.46	-4,401.22	74.72	4,401.32	0.00	0.00	0.00
12,777.42	90.34	179.92	7,444.00	-4,478.63	74.83	4,478.73	0.00	0.00	0.00

TD Well @ 12777.42ft

Corporate Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well BEIERLE 26-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5135.00usft (Drilling Rig)
Site:	1N-66W-26 BEIERLE 2-26HZ PAD	North Reference:	True
Well:	BEIERLE 26-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-2		

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")	
1,521.46	1,500.00	9 5/8" Csg	9-5/8	13-1/2	
8,012.68	7,472.00	Top of Production	5-1/2	7-7/8	

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,807.14	1,775.00	Fox Hills				
4,453.03	4,327.00	Parkman				
4,938.65	4,811.00	Sussex				
7,395.06	7,225.00	Sharon Springs				
7,415.16	7,240.00	Niobrara				
7,777.20	7,435.00	Nio B				

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
250.00	250.00	0.00	0.00	Begin Nudge @ 250.00ft	
1,298.00	1,284.90	142.55	9.47	End Nudge @ 1298.00ft	
4,098.00	3,980.17	899.51	59.75	Begin Drop @ 4098.00ft	
4,884.00	4,756.35	1,006.42	66.85	End Drop @ 4884.00ft	
6,883.47	6,755.82	1,006.42	66.85	KOP @ 6883.47ft :: DLS = 8°/100'	
8,012.68	7,472.00	286.02	67.89	End Build @ 8012.68ft	
12,777.42	7,444.00	-4,478.63	74.83	TD Well @ 12777.42ft	