00751849

Colorado Oil and Gas Conservation Commission
1136 Sheer Blvd.
Denver 4, Colorado

12

OFFICE OF STATE OIL INSPECTOR
Oil and Gas Conservation
Department

- - -

LOG OF OIL AND GAS WELL

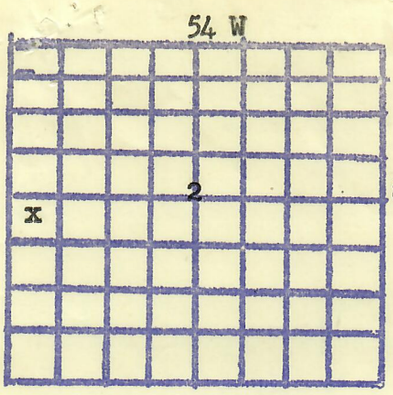

Locate Well Correctly

Maude Knutson A-1

Late Tuesday

Company British-American Oil Prod. Co. Address Box 620, Casper, Wyoming.
State or Patented Patented Field Yenter Block State Colorado.
Well No. 1 Sec. 2 T. 8 N R. 54 W Meredian County Logan
(W) (E)
Location 330 Ft. (S) of N Line and 330 Ft. (W) of W line of SW/4 Elevation 4282 G.L.
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed [illegible]
Title District Superintendent.

Date November 8, 1951.

The summary on this page is for the condition of the well as above date.
Commenced drilling August 6, 1951 Finished Drilling August 17 19 51

OIL SANDS OR ZONES

No. 1, from 5010 to 5053 "D"
No. 2, from 5118 to 5170 "J"
No. 3, from to
No. 4, from to
No. 5, from to
No. 6, from to

IMPORTANT WATER SANDS

No. 1, from to
No. 2, from to
No. 3, from to
No. 4, from to

CASING RECORD

Size	Weight per ft.	Threads per inch	Make	Amount	Kind of Shoe	Cut & Pulled from	Perforated From	Perforated to	Purpose
9-5/8	25.4	8 Rd	Armco	200'					
5½	15.5	8 Rd	J-55	5192'	Baker				

MUDDING AND CEMENTING RECORD

Size	Where Set	No. Sacks of Cement	Methods used	Mud Gravity	Amount of Mud Used
9-5/8	195 KB	160	HOWCO		
5½	5184 KB	250	HOWCO		

PLUGS AND ADAPTERS

Heaving plug-Material Length Depth Set
Adapters-Material Size

SHOOTING RECORD

Size	Shell Used	Explosive Used	Quantity	Date	Depth Shot	Depth Cleaned Out

TOOLS USED

Rotary Tools used from 0 ft. to 5185 ft. and from ft. to ft.
Cable tools were used from 5122 ft. to 5161 ft. and from ft. to ft.

DATES

November 8 1951 Put to producing September 13 1951
The production for the first 24 hours was 96.5 barrels of fluid of which .586 % was oil, .414 % water, % sediment. Gravity Be, 38 Est.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas . Rock Pressure, lbs. per sq. in

EMPLOYES

Herndon Drilling Company Driller , Driller
Driller , Driller

FORMATION RECORD

From	To	Total Feet	Formation
0	198	198	Surface
198	4700	4502	Shale
4502	5010	508	Shale & Sand
5010	5053	43	Sand
5053	5118	65	Sand & Shale
5118	5170	52	Sand
5170			TD