


* Revised orders based
on stage cement info
Submitted 5/19/98

(C)



00623359

VERBAL REQUEST

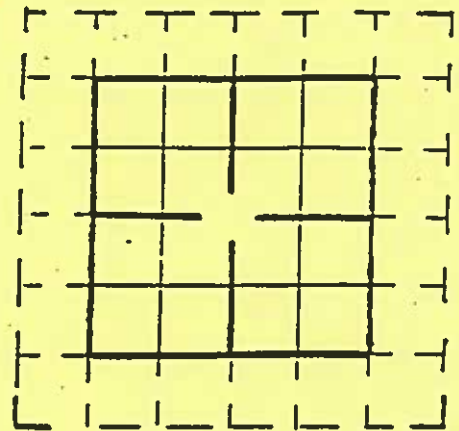

NOTICE OF INTENT TO DRILL _____
NOTICE OF INTENT TO ABANDON X
OTHER _____

COMPANY Soper Production ADDRESS FAX 970-669-4077
BY Andy Peterson PHONE NO. 970-669-7411 EXT. _____
WELL NO. #-1 LEASE E.J. Harms
COUNTY Weld FIELD Lonesome Coyote DRLG UNIT _____

LOCATION SW SW SEC 8 TWP 11 N RNGE 59 W MERIDIAN _____
_____ ft. from N or S Sec. Line, and _____ ft. from E or W Sec. Line

ESTIMATED DATE OF WORK _____ ESTIMATED TIME _____

DETAILS OF PLAN OF WORK: T.D. 7470 FORMATION ↓ sand (7394'-7404')

SURFACE CASING 8 5/8" @ 370' stage tool @ 1189' Cmt with 150 sx lite
1) set CIBP @ $\pm 7350'$, dump bail 2-3 sx cement on CIBP ^{tailed w/ 25 sx premium}

- * 2) Set 15 sx cement plug across Fo tool (1240'-1140')
3) Set 15 sx cement top plug at surface - split with half
inside 5 1/2 casing and half inside 5 1/2"-8 5/8" Annulus.
cut 4' below G.L., weld plate

BONDING STATUS: PLUGGING _____ SURFACE _____ OTHER _____

Is surface owner also mineral owner? _____

ACREAGE LEASED SURROUNDING DRILLSITE _____

APPROVED BY: J. Binkley DATE 5/20/98

contact Ed Binkley 48 hours prior to MTRU
at 970-842-4465

* Have wireline operator verify Fo tool depth