



Drill Stem Test Report



Reliable Drill Stem Testing

*Rocky
Mountain
Region*

**HOME
OFFICE**

•
**STERLING
COLORADO**
•

POST OFFICE BOX 712
PHONE 522-1206

Contractor Signal Drlg. Co. Top Choke 1"
 Rig No. 4 Bottom Choke 5/8"
 Spot SW-NE Size Hole 8 3/4"
 Sec. 34 Size Rat Hole None
 Twp. 11 N Size & Wt. D. P. 4" 14.00
 Rng. 80 W Size Wt. Pipe None
 Field Wildcat I. D. of D. C. 2 1/4"
 County Jackson Length of D. C. 233'
 State Colorado Total Depth 6426'
 Elevation 7948' "Ground" Interval Tested 6266-6426
 Formation ? Type of Test Straight
 Tool Open @ 7:50 A. M.
 Flow #1 10 Min. SIP #1 60 Min. Flow #2 90 Min. SIP #2 120 Min.
 Flow #3 Min. SIP #3 Min. Flow #4 Min. SIP #4 Min.
 B. H. T. 184° Gravity
 Mud Wt. 9.5 Viscosity 50

TOOL SEQUENCE

RECEIVED

JAN 31 1974

COLD. OIL & GAS CONS. COMM.

6260-----

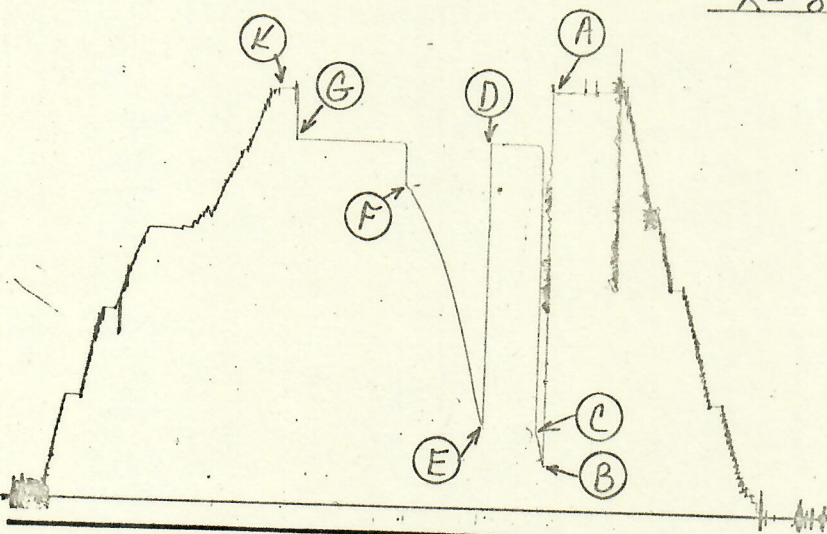
6266-----

TD 6426-----

PRD Make Kuster AK-1
 No. 8864 Cap. 5800 @ 6296
 Press Field Corrected

IH	A	3165	3139
FH	K	3150	3124
Flow #1-IF	B	352	353
FF	C	588	577
SIP #1	D	2752	2752
Flow #2-IF	E	647	632
FF	F	2427	2416
SIP #2	G	2752	2748
Flow #3-IF	H	None	Taken
FF	I	"	"
SIP #3	J	"	"

Pressure Below
Bottom Packer
Bled To

Our Tester: Harold SchmidtWitnessed By: R. DahlgrenT-2027R-8864

RECOVERY IN PIPE

DID WELL FLOW - Gas No Oil No Water No

5785' Total fluid
 1300' Drilling mud = 14.04 Bbl.
 4485' Formation water = 47.17 Bbl.

REMARKS:

1st Flow - Tool opened with a good blow for 10 minutes.
 2nd Flow - Tool opened with a good blow and remained throughout open.

Corrected pressures in 6 and 12 minute increment readings on following page.

Operator
See Distribution
SUNCO Petroleum Co.

Well Name and No. Platteland & Cattle #1
Ticket No. 2027

Date 1-1-74

DST No. 1
No. Final Copies 13

SOHIO PETROLEUM CO.
Platteland & Cattle #1 DST #1 Ticket #2027

Initial Shut-in

6 min.	2744	lbs.
12 "	2746	"
18 "	2748	"
24 "	2749	"
30 "	2750	"
36 "	2751	"
42 "	2752	"
48 "	2752	"
54 "	2752	"
60 "	2752	"

Final Shut-in

12 min.	2743	lbs.
24 "	2744	"
36 "	2745	"
48 "	2746	"
60 "	2746	"
72 "	2747	"
84 "	2747	"
96 "	2747	"
108 "	2748	"
120 "	2748	"

DISTRIBUTION OF FINAL DST REPORTS

Company Operating Well _____ Sohio Petroleum Co. _____ Tkt. No. _____ 2027
Lease Platteland & Cattle Well No. 1 Field Wildcat
County Jackson State Colorado Sec. 34 Twp. 11 N Rng. 80 W Spot SW-NE
DST. No. 1 Date of Test 1-1-74 Interval Tested 6266-6426

BE SURE AND SHOW CORRECT ADDRESS AND NUMBER OF COPIES. STATE ADDRESS TO WHICH ORIGINAL CHART WILL BE MAILED.

Original & 2 copies: Sohio Petroleum Co., Attn: T. Schmitt, 1100 Penn Tower, Oklahoma
City, Oklahoma, 73112

3 copies: May Petroleum, Inc., 1435 Republic National Bldg., Dallas, Texas, 75201

6 copies: J.H. Walters, % Sohio Petroleum Co., Box 673, Russell, Kansas, 67655

1 copy: Robert Dahlgren, 4750 McKinley Drive, Boulder, Colorado, 80303

Our Tester _____ Approved by _____