

Foundation Energy Management, LLC

WELLBORE DIAGRAM

Well / Battery Columbine Sp Fed 14C-13-4-104	Prospect Name		Total Depth 2000	Current Status TA
Location NE NW	Sec-Twn-Rng 13 4S 104W		Producing Horizon Mesaverde	County & State Rio Blanco, CO

WELLBORE DIAGRAM

Prepared Date: 1/3/19
Prepared By: Adam Johnson

General Info

API #: 05-103-10539

Tubing Detail
no tubing


Rods **Length** **Depth**
no rods

Pump Details:

Pumping Unit Details:

Well Notes:

CIBP set in 2015

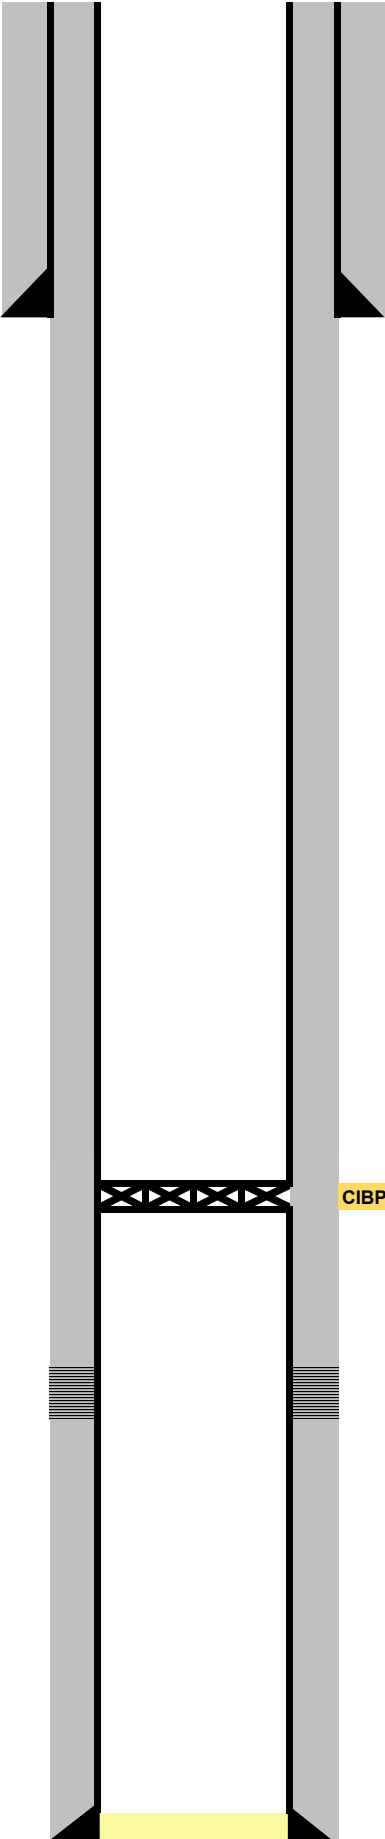

Surface Casing
8-5/8" inch (OD)
24 # (weight)
grade
271 depth from KB
Surface cement top Visual Returns
185 sacks of cement
12.25 inch (OD) HOLE SIZE

Production Casing
5-1/2" inch (OD)
17.00 # (weight)
grade
1990 depth from KB
0 cement top CALC
205 sacks of cement
7-7/8" inch (OD) HOLE SIZE

Perforations
1,267' - 1,524'
Mesaverde