

Foundation Energy Management, LLC

WELLBORE DIAGRAM

Well / Battery	Prospect Name	Total Depth	Current Status
Kenwood -Hunters 4	0	0	SI
Location	Sec-Twn-Rng	Producing Horizon	County & State
0	30-8-100	0	0

CURRENT WELLBORE DIAGRAM

Prepared Date: 1/0/1900
Prepared By: Bill Johnson


General Info

API #: 05-077-05134

KB Elevation: 7211
 GL Elevation: 7200

Spud Date: 7/18/1957
 Completion Date: 8/10/1957

TVD: 2397
 MD: 2400
 Last PBSD: N/A

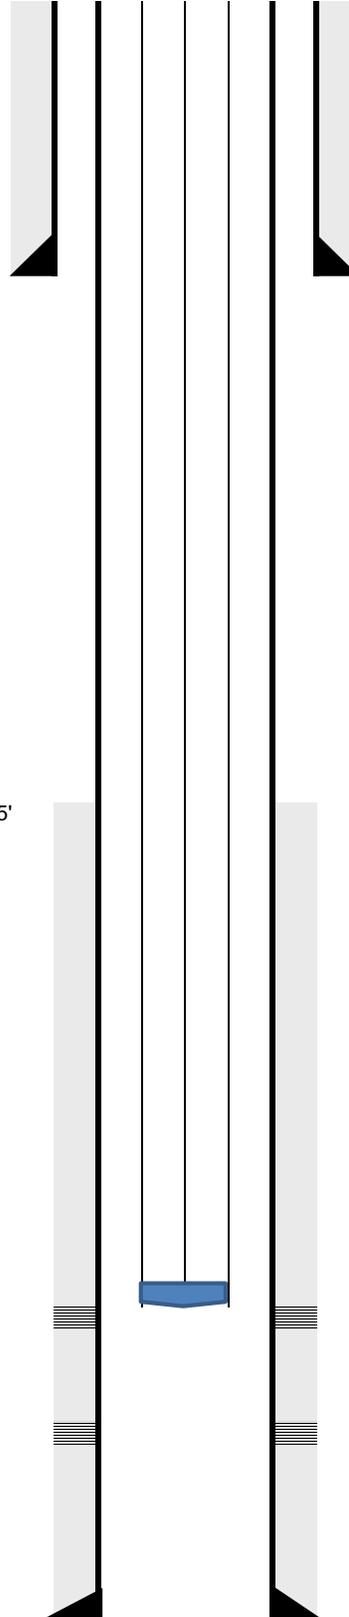

Surface Casing

8-5/8 inch (OD)
 24 # (weight)
 J-55 grade
 300 Ft Measured Depth from KB
 SURF Ft cement top Visual Returns
 200 sacks of cement
 13 inch (OD) HOLE SIZE

Production Casing

5-1/2 inch (OD)
 14 # (weight)
 J-55 grade
 2400 Ft Measured Depth from KB
 Ft cement top CBL
 150 sacks of cement
 7-7/8 inch (OD) HOLE SIZE

Tubing Detail

2 inch(OD)
 # (weight)
 J-55 grade

TOC @ 1355'

Tubing Tally	Length	Depth
156		5136 Ft KB MD
		Ft KB MD

Rod Design	Tally	depth
3/4	202	Ft KB MD
		Ft KB MD

Open Perforations

1858-1874; 2104-2130 Ft Measured Depth

Well Notes:
 TOC @ 1355' was questioned in 2003

TD=