




OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

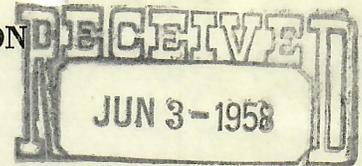

PLUGGING RECORD

OIL & GAS CONSERVATION COMMISSION

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Shell Oil Company Field Wildcat x
Lease Name B. G. Clevenger Well No. 1 County Baca
Location C SW SW Section 2 Township 35S Range 42W Meridian 6th PM
660 feet from S Section line and 712 feet from W Section Line
N or S E or W

TOTAL DEPTH 4849' DATE OF PLUGGING 6/2/58

DETAILS OF WORK

- 5/11/58 Spudded 19:00 MST
5/13/58 Ran and cemented 404' of 13-5/8" surface casing at 417' w/300 sx of 50/50 Pozmix and 150 sx of regular cement.
5/25/58 Ran DST No. 1 3813 - 3833' (Marmaton) Results on completion report.
6/1/58 Ran Induction-Electrical Survey, Gamma Ray Neutron and Microlog.
6/2/58 Plugged well w/40 sx of cement at base of surface casing and 25 sx at top of surface. Ran heavy drilling mud in between.

D & A 6-2-58.

Table with 2 columns and 7 rows: AJJ, DVR, WRS, HHM, JAM, FJP, JJD, FILE. Checkmarks are present next to FJP and JJD.

BEST IMAGE AVAILABLE

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved: JUN - 3 1958 Date 6/2/58
Company Shell Oil Company
Address 1845 Sherman Street Phone No. AC 2-8454
Director [Signature] By [Signature] (Signature) Title Division Prod. Supt.

L. W. Elderkin

(copy for D/109)