

Blac Frac Tanks, Inc.
808 County Road 215
Parachute, CO 81635

Plugging Report for the COGCC. Geowell #1

June 28, 2019 Friday

Plug #1

EOT landed at 125' with swab cup on bottom. Mixed and pumped 55 sks Type 2 cement, Last 25 sks mixed with 2% Calc2. (11.2 bbls cement slurry) @ 15.6 ppg. Displaced with 1 bbl water, pulled out of hole with tbg. Well circulated. WOC for 2 hrs.

June 28, 2019 Friday

Plug #2

Tag plug #1 at 221'.

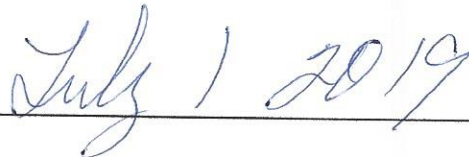
Land EOT at 190' Mixed and pumped 78 sks type 2 cement. (19 bbls cement slurry) with cement returns to surface with 65 sks mixed. POOH with tbg and laid down. RD service unit.

Top out with 1 sack and install dry hole marker.

Pumped a total of 134 sks type 2 cement


Ralph G Snow

President Blac-Frac Tanks, Inc


July 1 2019