

FIELD TICKET

TICKET NUMBER: DS-204

CEMENTING - ROCKY MOUNTAIN DIVISION

P.O. BOX 827 - VERNAL UT, 84078 - (435) 789-7407

COMPANY NAME: LOCIN OIL CORPORATION

DATE: JULY-18-THRU-19

COUNTY: RIO BLANCO

LEASE NAME: FORK UNIT 9-10-2-2

RIG NO: NOTHEREN PROD

DESCRIPTION	QTY	UNIT	RATE	AMOUNT
PUMP TRUCK MILEAGE	200	MILES	\$6.90	\$1,380.00
CREW TRUCK MILEAGE	200	MILES	\$4.05	\$810.00
PUMP CHARGE	960 FT	EA	\$4,200.00	\$4,200.00
DATA ACQUISITION	1	1 EACH	\$1,800.00	\$1,800.00
BLENDING CHARGE	76	FT3	\$3.80	\$288.80
DELIVERY CHARGE	117	TM	\$2.30	\$269.10

CEMENT

PREMIUM (CLASS G)	50	SKS	\$30.00	\$1,500.00
P-3	15	LBS	\$25.00	\$375.00
P-503	40	LBS	\$25.00	\$1,000.00
P-401	95	LBS	\$1.97	\$187.15

[illegible]

MISC.

ADDITIONAL HOURS	2	HOURS	\$750.00	\$1,500.00

			SUBTOTAL:	\$13,310.05
			DISCOUNT:	\$6,655.03
			AFTER DISCOUNT:	\$6,655.03
			UTERO CHARGE:	
THANK YOU !!!			TOTAL INVOICE:	\$6,655.03

OPERATOR: DAVID SEARLE

ACCEPTED AND APPROVED BY:

MIKE

TAXES WILL BE ADDED ON INVOICE

*****ANY QUESTIONS OR CONCERNS PLEASE CALL*****

PROPETRO**JOB SUMMARY****TICKET NUMBER: DS-204****CEMENTING - ROCKY MOUNTAIN DIVISION**

P.O. BOX 827 - VERNAL UT, 84078 - (435) 789-7407

COMPANY NAME: LOCIN OIL CORPORATION**DATE: JULY-18-THUR-19****COUNTY: RIO BLANCO****LEASE NAME: FORK UNIT 9-10-2-2****RIG NO: NORTHERN PRO****JOB TYPE: PUDDLE SQUEEZE**

DESCRIPTION	WGT/GRADE	THREAD	DEPTH FROM	DEPTH TO
PRODUCTION CSG SIZE: 5 INCH	15.5 LBS	8 ROUND	0	960 + FT
TUBING SIZE: 2-3/8	4.6 LBS	TBG	0	960 FT
MATERIALS FURNISHED	SACKS	SLURRY WT PPG	SLURRY YIELD FT3	WATER GAL/SK
PREMIUM "G" CEMENT (2 % CACL, .8% 35, .3%CFL-115)	50SKS	15.8 LBS	1.15 YEILD	5 GAL / SK

EQUIPMENT: CREW TRUCK # 1204, PUMP TRUCK # 69 , BULK TRUCKS# 223 - 0518**PERSONELL: DAVE S, POTER , RYAN**

NOTES : MIX PUMP 15.8 LB CMT 4.7 BBLS - 24 SKS WITH ADDS= 200 FT CMT PLUG TO COVER FROM 960 FT UP TO 905 FT + EXCEES TO PUDDLE SQUEEZE, HOLES ABOVE FROM 905 FT TO +/- 935 FT. PSI TESTED AND WAS GOING DOWN . RIH TBG TO 1170 FT RIG ROLLED HOLE. THEN SET A 50 SK PLUG 410 FT HOC +/- 760 FT WATCHED PSI. DID DROP WITH THE 15 MIN. RELEASED PSI AND STANDBY FOR 15 MIN WITH HYDROSTATIC WHEIGHT ON CMT. PSI BACK UP WITH PUMP TO 350 PSI IT HAD SLOWED DOWN , WATCHED FOR 15 MIN. THEN RELEASED PSI AND LEFT THE WELL FOR WEEKEND AND TAG THE FOLLOWING MONDAY.+/- 3/4 BBLS OF CMT BEHIND CSG

OPERATOR: DAVID SEARLE**ACCEPTED AND APPROVED BY:****MIKE**

CEMENTING - ROCKY MOUNTAIN DIVISION

P.O. BOX 827 - VERNAL UT, 84078 - (435) 789-7407

COMPANY NAME: LOCIN OIL CORPORATION

DATE: JULY-18-THU-19

COUNTY: RIO BLONCO-COL

LEASE NAME: FORK UNIT 9-10-2-2

RIG NO: NORTHERN PROD

DESCRIPTION	TIME	RATE	PSI	VOLUME
PRE TRIP EQUIPMENT IN VERNAL	11:00	~	~	~
ARRIVE ON LOCATION	13:30	~	~	~
RIG DRILLING OUT CMT PLUG	14:30	~	~	~
SAFETY MEETING ON RIG UP	14:30	~	~	~
SPOT TRUCKS / RIG UP	14:40	~	~	~
SAFETY MEETING ON CMT JOB	15:00	~	~	~
SET BALANCE PLUG @ 960 FT	15:00	~	~	~
200 FT PLUG / TOOH SQUEEZE	15:00	~	~	~
# 1 BALANCE PLUG E.O.T @ 960 FT	15:30	~	~	E.O.T @ 960 FT
R.I.H / FILL HOLE TO CIR	15:30	~	~	~
RIG DO PSI TEST ON CSG	16:11	~	~	~
PSI DROPPED	16:16	~	~	~
RIH TO 1170 FT / TAGGED	16:33	~	~	~
RIG / FILL HOLE TO CIR	17:00	~	~	~
#1 BALANCE PLUG E.O.T 1170 FT	17:08	~	~	E.O.T @ 1170 FT
START TO FILL PUMPING LINES	17:09	0.5	0 / 50 PSI	0 / 2 BBLS
PRESSURE TEST LINES	17:09	0.5	0 / 1500 PSI	0 / .5 BBLS
LINES HELD / RELEASE PSI	17:10	0.5	1500 / 0 PSI	
START H2O SPACER-GOOD CIR	17:11	2	0	0
END H2O SPACER-GOOD CIR	17:18	2	80	4.7 BBLS
START 15.8 LB CMT W/ ADDS	17:19	2	80	0
PUMPING 15.8 LB CMT-GOOD CIR	17:21	2	90	5
PUMPING 15.8 LB CMT-GOOD CIR	17:21	2	90	7
PUMPING 15.8 LB CMT-GOOD CIR	17:22	2	90	9
END 15.8 LB CMT-50 SKS	17:23	2	90	50 SKS / 10.2 BBLS
START H2O SPACER-GOOD CIR	17:23	2	90	0
END H2O SPACER-GOOD CIR	17:24	2	90	1
START DISPLACEMENT W/ H2O	17:24	1	100	1
END DISPLACEMENT	17:25	1	100	2.8 BBLS
RIG TOOH	17:26	~	~	TOOH
TIE ONTO 2" ON BLP	~	~	~	~
START PUDDLE SQUEEZE W /H2O	17:57	0.5	0	0
PUMPING DISP H2O	17:57	0.5	0	1
PUMPING DISP H2O	17:58	0.5	30	1.5
PUMPING DISP H2O	17:59	0.5	80	2
CAUGHT PRESSURE	18:00	0.5	190	2.5
END PUMP -HOLD PSI	18:02	0.5	430	3 BBLS
.5 BBLS +/- SQUEEZED BEHIND CSG	18:02	~	~	~

OPERATOR: DAVID SEARLE THANKS ACCEPTED AND APPROVED BY: MIKE

JOB LOG

TICKET NUMBER: DS-204

CEMENTING - ROCKY MOUNTAIN DIVISION

P.O. BOX 827 - VERNAL UT, 84078 - (435) 789-7407

COMPANY NAME: LOCIN OIL CORPORATION

DATE: JULY-18-THU-19


COUNTY: RIO BLONCO-COL

LEASE NAME: FORK UNIT 9-10-2-2


RIG NO: NORTHERN PROD[illegible]

OPERATOR: DAVID SEARLE **THANKS** **ACCEPTED AND APPROVED BY: MIKE**


LOCIN OIL FORK UNIT 9-10-2-2

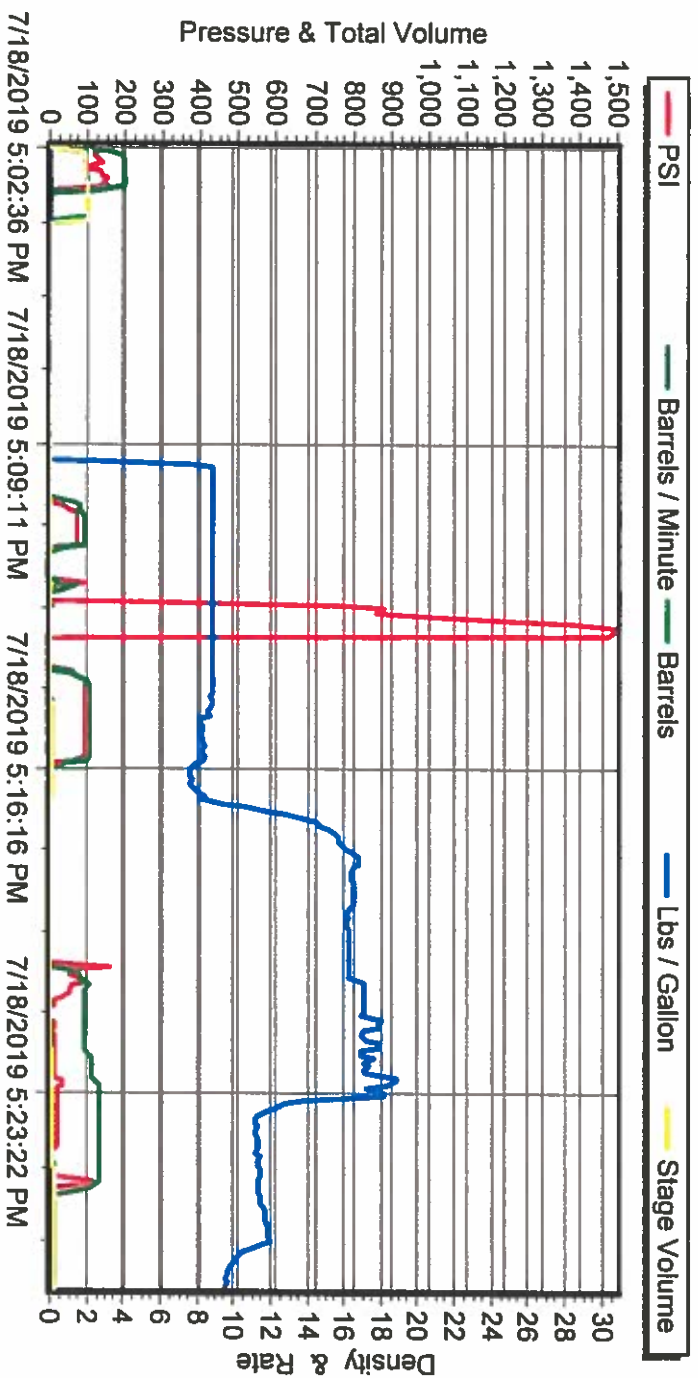

LOCIN OIL FORK UNIT 9-10-2-2

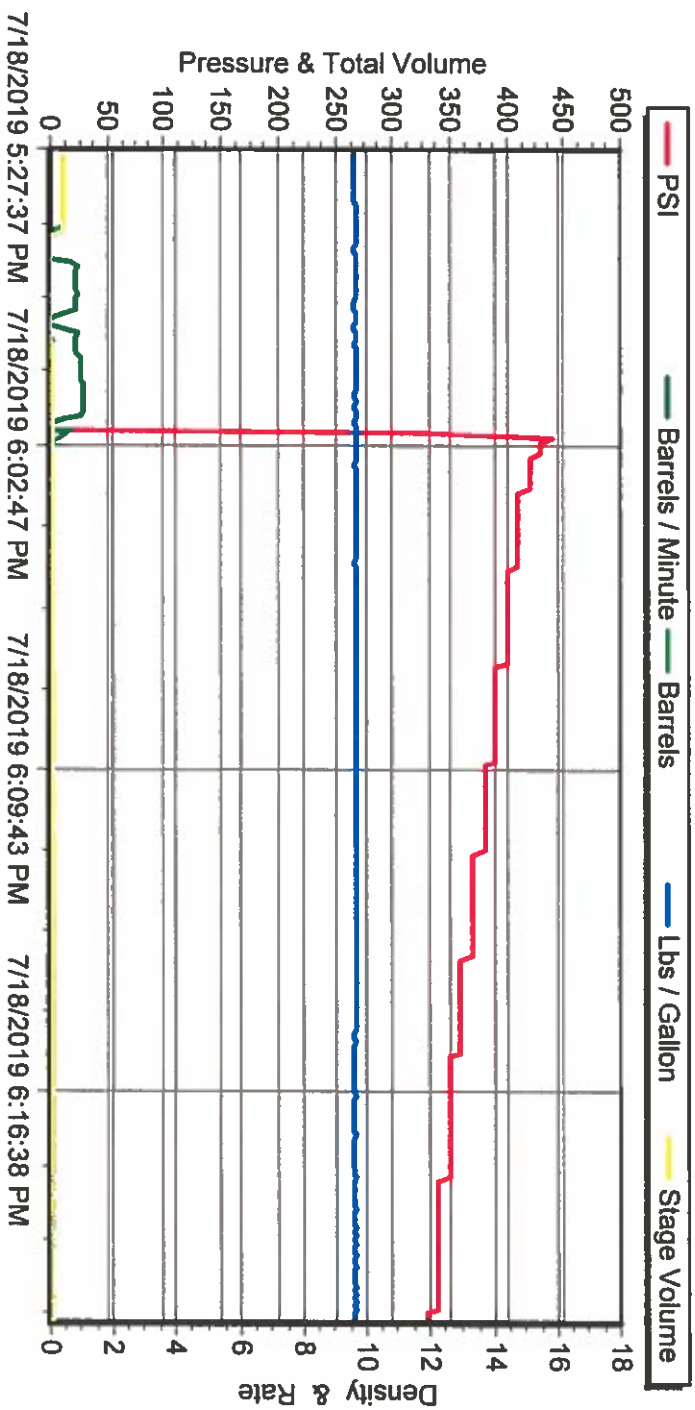

LOCIN OIL FORK UNIT 9-10-2-2

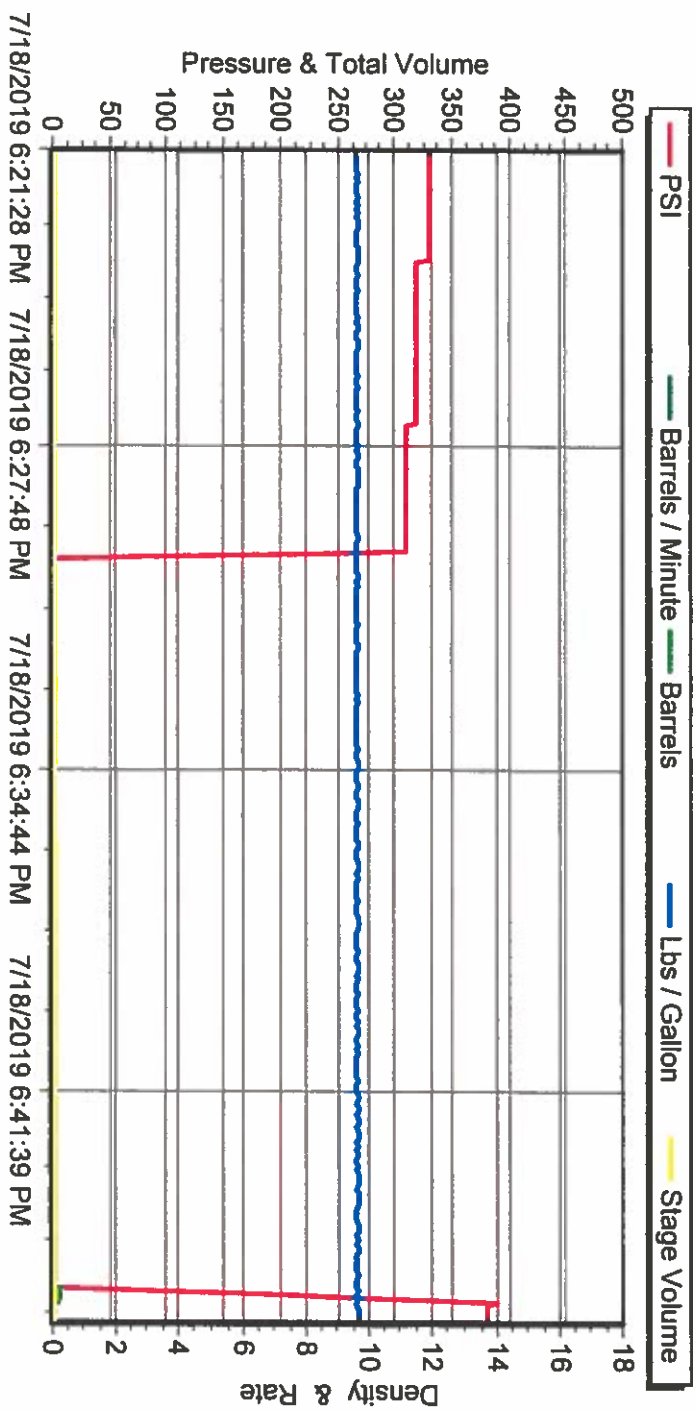

LOCIN OIL FORK UNIT 9-10-2-2

