

OFFICE OF STATE OIL INSPECTOR
 SUNDRY NOTICES AND REPORTS OF WELLS
 LOCATED ON PRIVATE LANDS



Associated "B" lease # 2

(Indicate nature of data by checking below)

- Notice of intention to drill.....
- Notice of intention to change plans.....
- Notice of date for test of water shut-off.....
- Report on result of test of water-shut-off.....
- Notice of intention to re-drill or repair well.....
- Notice of intention to clean out well.....
- Statement of shooting.....
- Statement of perforating.....
- Notice to pull or otherwise alter casing.....
- Notice of intention to abandon well.....
- Report of work done on well since previous report.....
- Report of setting 7" casing..... x

Sept. 27, 19 47

Following is a ~~(notice of intention to do work)~~ ~~(On land)~~
 (report of work done) (patented) described as follows:

Colorado	Rio Blanco	Rangely
State	County	Field
Well No. <u>2 SW NW 3</u>	<u>1N</u>	<u>102W</u>
($\frac{1}{4}$ Sec.)	(Twp.)	(Range)
		<u>6th</u>
		(Meridian)

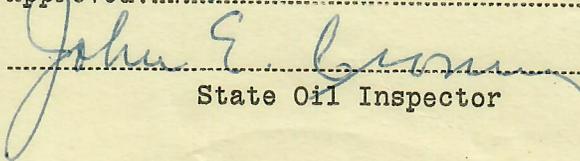
The Well is located 2359 ft. ~~(N)~~ of North and 131 ft. (E) of West
 (S) ~~(W)~~


Line Section 3

The elevation above sea level is R.D.B. 5188.95 ft.

Details of Plan of Work: (State names of and expected depths to objective sands; Show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.)

Cemented on Sept. 4, 1947, 2859' - 7" 23# J-55, 8RT Casing and 2867' - 7" 20# H-40 8RT casing with 1000 sacks Ideal Portland cement. Total of 5726' - 7" casing landed 5692'. Temperature survey showed top of cement behind casing at 2000'. Top Dakota Sand 3220'. Waited on cement 53 hours then Drilled plug. Tested casing with 1000# pressure for 30 minutes (Test OK).

Approved: 10-2-47

 State Oil Inspector

Company Stanolind Oil and Gas
 Address Rangely, Colorado
 By 
 Title Field Supt.

Submit reports of proposed work, for approval, on this form. In Duplicate.