


Colorado Interstate Gas

LEASE: Latigo #14
FIELD: Latigo
COUNTY: Arapahoe
STATE: Colorado
LOCATION: 18 5S 60W
API #: 05-005-06042-00
SPUD: 05/31/68 [Original]
SPUD: 04/22/77 [Re-Entry]
Rev. Date 09/05/19 - APT

ELEVATION: GL: 5,372' KB = GL + 9'
TD: 6,698' GL PBTD: 6,681' GL

Size	ID
5-1/2	4.95

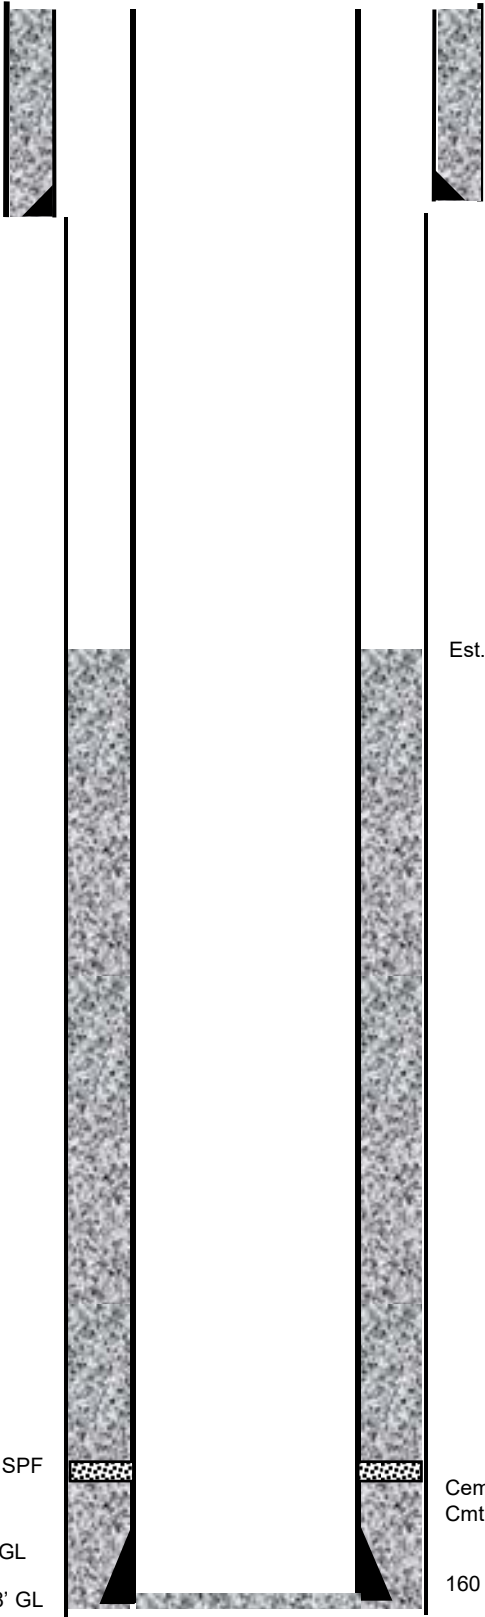

Cemented w/ 200 sx Regular Cement

8-5/8", 24# csg @ 291' GL

TD 12-1/4" hole @ 296' GL

Est. TOC @ 1,300' GL Temp (04/26/77)

Perf: 6,632'–6,639' GL w/ 2 SPF

PBTD @ 6,681' GL

TD 7-7/8" hole @ 6,698' GL

Cemented w/1,450 sx HLC + 225 sx 50/50 poz.
Cmt Did Not Circ

160 jts, 5-1/2", 15.5#, K55, 8R @ 6,695' GL