




OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

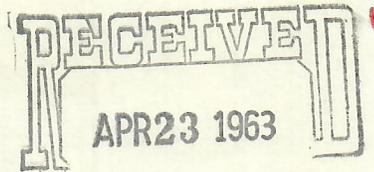

075-06020

PLUGGING RECORD

OIL & GAS CONSERVATION COMMISSION

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Consolidated Oil & Gas Co. Field Minto Wildcat
Lease Name Armstrong Well No. 1 County Logan 6 Ch
Location 1/2 of E 57 acres (Lot 3) Section Township 8N Range 53W Meridian
feet from Section line and feet from Section Line
N or S E or W

TOTAL DEPTH T. D. 4877 DATE OF PLUGGING 3-23-63
P.B.D. 4862

DETAILS OF WORK

Rigged up Black Gold Oils Casing Pulling Rig. Worked 5 1/2" J-55 15.5# pipe. Dumped pea gravel from 4860' to 4800'. Placed 10 sk. reg. cement plug from 4800' to 4710'. Shot pipe off at 3,858'. Pulled 97 jts. of pipe. Loaded hole. Placed 15 sk. reg. cement plug in 9 5/8" surface pipe from 250' to 210'. Placed 5 sk. reg. cement plug from 15' to top of surface pipe. Placed 9 5/8" male thread protector cap in top of surface.

Table with 2 columns and 6 rows: DVR, WRS, HHM, JAM, FJP, JJD, FILE. Checkmarks are present in the FJP and JJD rows.

EX 08



I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved: Date APR 24 1963 Company BLACK GOLD OILS Date 4-19-63
Address Box 588, Sterling, Colo. Phone No. 522-1855
Director Al Rogers By Linton W. Freeman Title Owner

T