




00218348

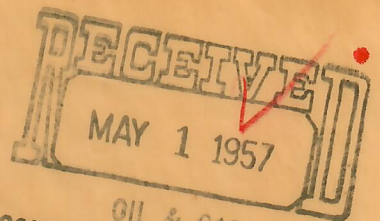

DRILLER'S WELL LOG

COMPANY: Amco & Sun Oil Company

C-NW-SW, Sec. 21,
Twp. 8N, Rge. 59W,
Weld County, Colorado

LEASE: Malo #2

OIL & GAS
CONSERVATION COMMISSION

0 160 Shale & bentonite
160 433 Shale
433 2372 Shale
2372 3889 Shale
3889 4500 Shale
4500 5170 Shale
5170 5765 Shale
5765 5998 Shale
5998 6205 Shale, lime
6205 6267 Shale & lime
6267 6645 Shale
6645 6680 Sand
6680 6713 Shale Silt
6713 6730 Silt Stone
6730 6749 Sand
6749 6759 Sand
6759 6788 Sand & shale
6788 6811 Sand
6811 Total Depth

COMMENCED: 4-14-57

COMPLETED: 4-27-57

CASING RECORD:

8-5/8" surface casing set @ 155'
W/90 sks. cement.

CORING POINTS:

D-Sand 6645' - 6680' 35'
J-Sand 6730' - 6747' 17'

Footage Cored 52'

TESTS:

#1 6650' - 6680'

Tool open 90 min. Shut in 20 min.

Gas to surface in 28 min. gauge 140,000 CF.
Rec. 20' mud. IFP-O#, FFP-O#, BHP-1840#.

LOGS:

Schlumberger Induction-Electrical &
Micro Logs run to T. D.

GEOLOGIST:

R. E. Maresh

BEST IMAGE
AVAILABLE

TOPS

GEOLOGICAL

ELEVATION: 4845' K. B.

NOTE: All meas. Kelly Bushing

Niobrara	5905	(-1060)	Bentonite	6530	(-1685)
Fort Hays	6163	(-1318)	D-Sand	6637	(-1792)
Carlisle	6207	(-1362)	J-Sand	6720	(-1875)
Green Horn	6267	(-1422)	Total Depth	6811	(-1966)

STATE OF COLORADO)
CITY & COUNTY OF DENVER) SS

I hereby affirm that the above and foregoing is
a true and correct copy of the log of the Malo #2, located C-NW-SW, Section
21, Township 8N, Range 59W, Weld County, Colorado.

CONTRACTOR: STRAIN DRILLING COMPANY

BY: *T. C. Strain*
T. C. Strain

Subscribed and sworn to before me this 30th day of April, 1957.

*Mary K. Knap*
Notary Public

My Commission expires April 26, 1959