



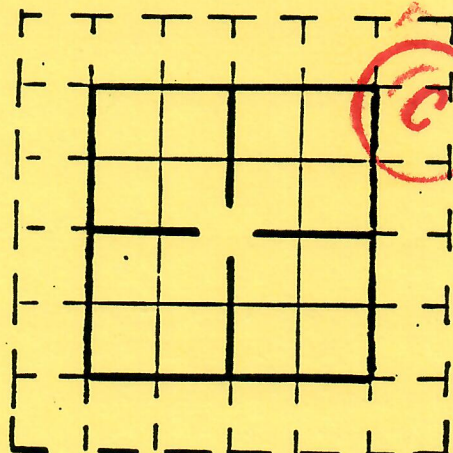
00238884

VERBAL REQUEST

NOTICE OF INTENT TO DRILL \_\_\_\_\_

NOTICE OF INTENT TO ABANDON 8

OTHER \_\_\_\_\_

COMPANY BANEY ADDRESS \_\_\_\_\_BY BOB BANEY PHONE NO. 1-522-2533 EXT. \_\_\_\_\_WELL NO. C-1 LEASE TETSELLCOUNTY LOGAN FIELD MT HOPE EAST DRLG UNIT \_\_\_\_\_LOCATION SE SW SEC 32 TWP 9N RNGE 53W MERIDIAN \_\_\_\_\_810 ft. from N or S Sec. Line, and 2042 ft. from E or W Sec. LineESTIMATED DATE OF WORK ASAP ESTIMATED TIME \_\_\_\_\_DETAILS OF PLAN OF WORK: T.D. PBTD 4910 FORMATION \_\_\_\_\_SURFACE CASING 8 5/8 TO 98 FTPERFS 4836 TO 4841 D SAND5 1/2 CSG NOT TO BE PULLED① DUMP SUFFICIENT SAND TO COVER PERFS AND DUMP 5 SKSCMT ON SAND ② SET 10 SKS CMT IN TOP OF SURF③ CUT CSG 4 FT BELOW GL, WELD ON PLATE ④ RESTORE SITEBONDING STATUS: PLUGGING B SURFACE \_\_\_\_\_ OTHER \_\_\_\_\_

Is surface owner also mineral owner? \_\_\_\_\_

ACREAGE LEASED SURROUNDING DRILLSITE \_\_\_\_\_

APPROVED BY: Sam Hule DATE 5-24-90 1700