




99999999

075-06555

OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

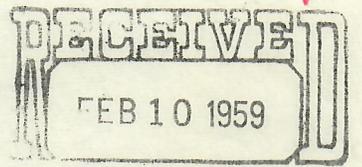

OIL & GAS CONSERVATION COMMISSION

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Arthur Edens & Otto Yenter Field Wildcat
Lease Name Knutson Well No. 1 County Logan
Location C-SW-SW Section 8 Township 9 North Range 54 West Meridian 6th
feet from Section line and feet from Section Line
N or S E or W

TOTAL DEPTH 5417 feet DATE OF PLUGGING Dec. 24, 1958

DETAILS OF WORK

8-5/8" Surface casing set at 215 feet with 125 sacks of regular Ideal cement. Filled hole with heavy drilling mud. Set a 50 sack cement plug opposite "D" Sand at approximately 5220 to 5270. Set a 15 sack cement plug in the base of the surface casing and a 10 sack cement plug at the top of the surface casing. Filled cellar with soil.

No prior approval on plugging Jim

No '4'

Table with 2 columns and 7 rows: AJJ, DVR, WRS, HHM, JAM, FJP, JJD, FILE. JAM and JJD have checkmarks.



00789562

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date FEB 10 1959

Director A. J. Jensen

Company Arthur Edens & Otto Yenter Date February 9, 1959

Address 625 Columbine Sterling, Colorado Phone No. La 2-1596

By [Signature] Title Geologist

T