



00241318

VIRG'S TESTERS, INC.

BOX 712 STERLING, COLORADO

Contractor Exeter Drilling Co. Top Choke 1"
 Rig No. 6 Bottom Choke 9/16"
 Spot W/2- SE Size Hole 7 7/8"
 Sec. 32 Size Rat Hole None
 Twp. 9 N Size & Wt. D. P. 1 1/2" 16.60
 Rng. 53 W Size Wt. Pipe None
 Field Mt. Hope East I. D. of D. C. 2 1/2"
 County Logan Length of D. C. 110'
 State Colorado Total Depth 4994'
 Elevation 4144' "Ground" Interval Tested 4930-4938
 Formation "J" Sand Type of Test Straddle

Tool Open @ 9:05 P M.
 Tool Open None min. before Initial Shut In None min.
 Tool Open 60 min. Total Final Shut In 30 min.

B. H. T. ? Gravity
 Mud Wt. 9.8 Viscosity 55

TOOL SEQUENCE

RECEIVED

MAR 25 1969

COLO. OIL & GAS CONS. COMM.

4924-----

4930-----

4938-----


TD 4994-----

PRD Make Kuster AK-1
 No. 1105 Cap. 4300 @ 4943
 Press Field Corrected

IH	A	2613	2609
FH	G	2602	2583
PF	B	None Taken	
IF	D	16	24
FF	E	33	48
ISIP	C	None Taken	
FSIP	F	677	695
Pressure Below Bottom Packer Bled To			2440

Our Tester: T. J. RittenhouseWitnessed By: W. L. Brown

T-9790
R-1105

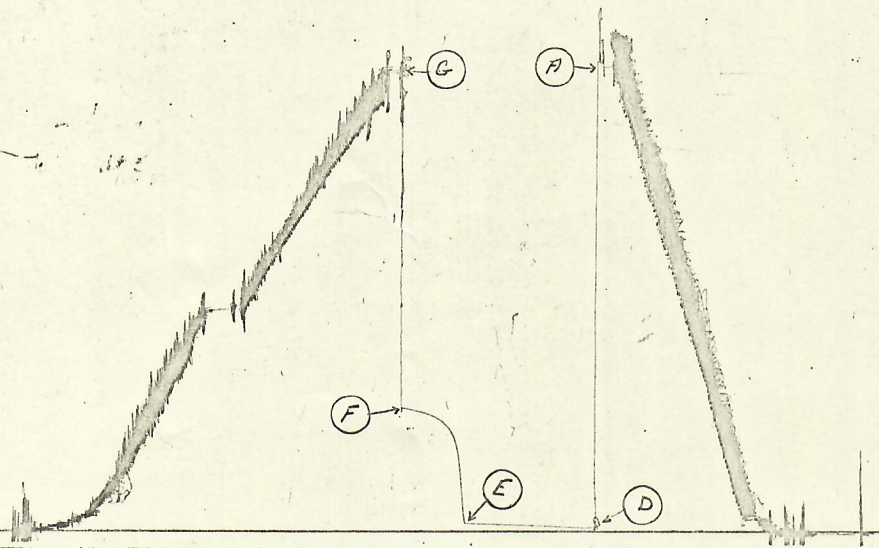

RECOVERY IN PIPE

DID WELL FLOW - Gas No Oil No Water No

65' Mud-cut water with 105' gas
 on top of fluid = 0.4 Bbl.

CORRECTED PRESSURES

Initial Shut-in

Final Shut-in

None Taken

5 mins 517 lbs.

10 " 602 "

15 " 645 "

20 " 667 "

25 " 686 "

30 " 695 "

REMARKS:

Opened with slight blow. Built to
 Weak blow in 5 minutes. Slight decrease
 the last 10 minutes of test.


Operator A. T. Skaer
 Address 920 Patterson Bldg., Denver, Colo.

Well Name and No. Teisell #D-1
 Ticket No. 9790

Date 1-17-69

DST No. 1
 No. Final Copies 5

BOTTOM CHART
T-9790 R-VT 33

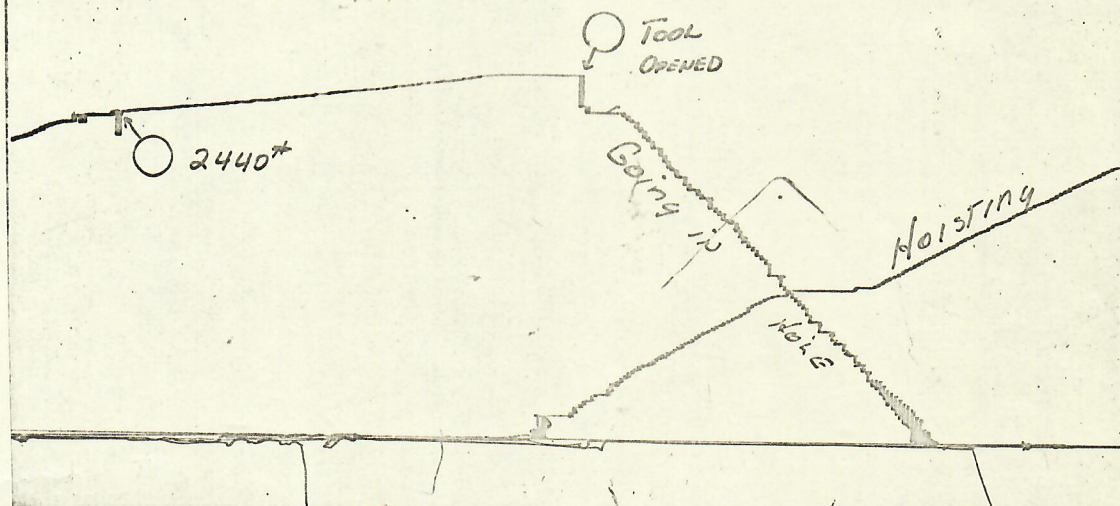

A. T SKAER
Tetsell #D-1 DST #1 Ticket #9790

This recorder blanked off below the bottom packer and since pressure bled to only 2440 lbs., which is more than the shut-in pressure, the bottom packer held. Recorder No. VT-33