




00264615

VERBAL REQUEST

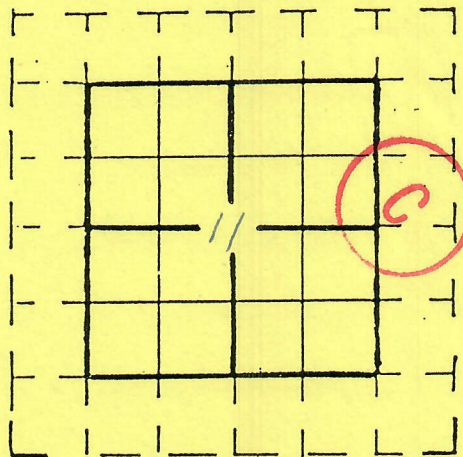

NOTICE OF INTENT TO DRILL _____
NOTICE OF INTENT TO ABANDON ☒
OTHER _____

COMPANY Intermountain Oil ADDRESS _____
BY Rick Grimette PHONE NO. _____ EXT. _____
WELL NO. 1 LEASE Walters
COUNTY Logan FIELD Cedar Creek DRLG UNIT _____

LOCATION SE NE SEC 11 TWP 9N RNGE 54W MERIDIAN _____
_____ ft. from N or S Sec. Line, and _____ ft. from E or W Sec. Line

ESTIMATED DATE OF WORK 7/14 ESTIMATED TIME _____

DETAILS OF PLAN OF WORK: T.D. CIBP @ 5075 FORMATION D sd perms

SURFACE CASING 8 5/8 @ 151 5008 - 5042

(Will shoot off csq @ 4300')

① Dump sand to top of perms, followed by 5 sacks cement

② 25 sacks 1/2 in 1/2 out of surface @ 151'

③ 5 sacks at top

④ Cut off csq 4' below GL, weld on plate.

BONDING STATUS: PLUGGING _____ SURFACE _____ OTHER _____

Is surface owner also mineral owner? _____

ACREAGE LEASED SURROUNDING DRILLSITE _____

APPROVED BY: J. H. Hance DATE 7/11/89