




00544934

OIL AND GAS COMMISSION  
OF THE STATE OF COLORADO

## SUNDRY NOTICES AND REPORTS ON WELLS

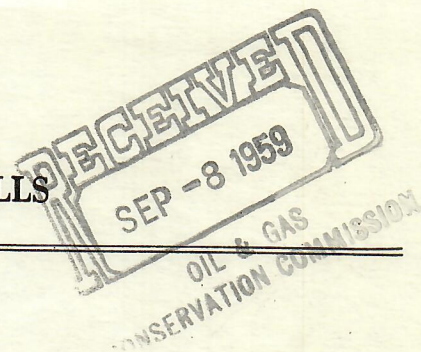

## INSTRUCTIONS

Notice must be given to the Director, and approval obtained in advance of the time when the owner or operator expects to recomplete or abandon a well or to change plans. Within thirty (30) days after recompletion, change of plans, or remedial work, a detailed report of the work done and the results obtained shall be submitted on this form in duplicate for wells on Patented and Federal lands, and in triplicate for wells on State lands. In work that affects only rods, pumps or tubing or other routine work such as, but not limited to, cleaning out to previous total depth, no report is necessary.

Notice of Intention to Recomplete ☐Report of Remedial Work ☐Notice of Intention to Change Plans ☐Report of Recompletion ☐Notice of Intention to Abandon Well ☒Other ☐

(Check appropriate space)

LEASE NAME McBride WELL NO. 1FIELD Curtis WILDCAT - COUNTY RouttLOCATION C NE NE Section 25 Township 6N Range 86W Meridian 6th  
(Quarter Quarter)660 feet from N Section Line and 660 feet from E Section Line  
N or S E or W

## (DETAILS OF WORK)

## WELL DATA:

TD 3740'

PBTD 1150'

8-5/8" casing @ 850'

10-3/4" casing @ 92.1'

7" casing @ 205'

## PROPOSED PLUGGING PROCEDURE

*verbal 8/27/59*

ALL	
DVR	
WRS	
HHM	
JAM	
FJP	
JJD	<input checked="" type="checkbox"/>
FILE	

Check fluid level water in hole. If water level is below 225' - will set bridge at this depth and dump 20 sacks cement. Calculated to fill 8-5/8" casing from 225' to 163', which would cover 42' of 7" hanging at 205'. Place 5 sack plug at the surface.

Casing to be cut off and capped below plow depth as per request of land owner.

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

## APPROVED:

Date

Director

Company Tennessee Gas Transmission Co. Date 9-4-59Address Box 1772, Casper, Wyoming Phone No. 2-6981By L. C. Bodemann, Jr. Title District Prod. Superintendent  
(Signature)