

OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

NOTICE OF INTENTION TO DRILL



INSTRUCTIONS:

A notice of intention to drill a well shall be filed in duplicate on all Federal and Patented lands, and in triplicate on all State lands. Do not begin operations until approved copy has been received. It is mandatory that the proposed location comply with all rules and regulations of the Commission. Locate well on section grid in proper location, and indicate extent of lease. Unless operations are commenced within 180 days after the date of approval hereof, this approval to drill will become null and void.

Name of Operator The Texas Company Phone No. Texas-Moffat
Address _____ City Hamilton State Colorado


How is liability secured: Well Bond (Attached) ☐; Blanket Bond ☐; Waiver ☐
(Check one)

Lease Name State-Colvert

Well No. 1

Field Name Tow Creek Wildcat ☐

County Routt

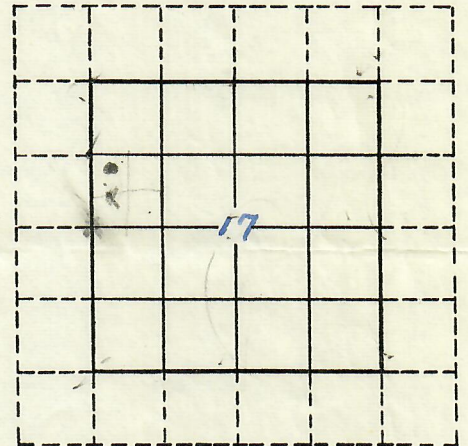

Location SW $\frac{1}{4}$ NW $\frac{1}{4}$ Section 17 Township 6-N Range 86W Meridian 6th PM
(quarter quarter)
525 feet from N Section line and 200 feet from E Section line of the South-West $\frac{1}{4}$ corner
N or S E or W

The well is located on: Patented land ☐ State land ☒ Federal land ☐

The well is located within a spaced area: Yes ☒ No ☐

Distance from proposed location to nearest property or lease line 200 feet.
Distance from proposed location to nearest drilling unit line * feet.

Objectives: Niobrara Depth 2400; Niobrara Pay Depth 3200
Formation Estimate Formation Estimate

Proposed length of surface casing 150 feet.

REMARKS:

Approximately 150', 10 3/4" casing will be run and cemented with 75-sx. to surface. Approximately 2600' of 8 5/8" casing will be run to shut off water and will be removed after 3200', 5 1/2" 14# J-55 production string is run and cemented with 100-sx, 2% gel.

* No drilling units established in area.

FILE	
DVR	
FJK	
OPS	
HHM	
AN	
JJD	

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:

Date SEP 16 1957

Company The Texas Company Date 9-12-57

Address Hamilton, Colorado Phone No. Hamilton

By H. A. McMin Title Dist. Supt.

Signature

OGCC(2):TTF:HSMcM:STB