


OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

PLUGGING RECORD

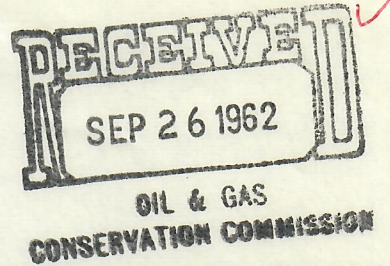

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator TEXACO Inc. Field Tow Creek Wildcat -
Lease Name State Colvert Well No. 1 County Routt
Location SW SW NW Section 17 Township 6N Range 86W Meridian 6th PM
(Quarter Quarter)
585 feet from S Section line and 200 feet from W Section Line 05 NW 1/4
N or S E or W

TOTAL DEPTH 3200 ft. DATE OF PLUGGING Aug. 24, 1962

DETAILS OF WORK

Moved in and rigged up. Set bridge plug and a 10 sack cement plug at 2600 ft. Shot 7" casing 2000 ft. and again at 1700 ft. Pulled 1700 ft. of 7" 23# casing.. Pumped hole full of mud laden fluid. Gel based mud, weight 8.9. Set 10 sack cement plug in top of hole.

Casing left in hole:

Size	From	To
13-3/8"	32'	Surface
10-3/4"	160'	Surface
7"	2699'	1700'

Cement plugs:

Size	From	To
10 sx	2600'	2550'
10 sx	20	Surface

DVR	
WRS	
HHM	
JAM	
FJP	
JJD	
FILE	

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date SEP 27 1962Company TEXACO Inc. Date 8-30-62Address Box 157, Craig, Colo Phone No. 824-6565By H. S. McMinn Title _____
(Signature)H. S. McMinn, District Superintendent

Director

ARB-b

OGCC (3) GRW HSMcM ASN