




00238695

OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

PLUGGING RECORD

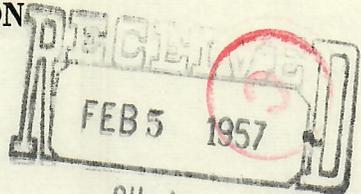

OIL & GAS CONSERVATION COMMISSION

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator The British-American Oil Producing Co Field E. Mt. Hope Wildcat

Lease Name GREEN Well No. E-1 County Logan

Location NW, NW (Quarter Quarter) Section 29 Township 9 N Range 53 W Meridian 6PM

330 feet from North Section line and 330 feet from West Section Line
N or S E or W

TOTAL DEPTH 5095KB PBD-5082KB DATE OF PLUGGING 1-31-57

DETAILS OF WORK

Dumped rock and gravel in hole plugging to 4970KB, 5 sax cement plug from 4970 to 4932. Shot casing off at 4190 KB leaving 904', 5 1/2" casing in hole from 4190 to 5094 KB. Completed pulling shot off portion of casing, filled hole with heavy mud from 4932 to 15' GL, placed rock bridge from 15 to 8' and capped surface casing with 5 sax cement, erected marker, filled cellar with soil and abandoned location.

| | |
|------|-------------------------------------|
| AJJ | |
| DVR | |
| FJK | |
| WRS | |
| HMM | |
| AH | |
| JJD | <input checked="" type="checkbox"/> |
| FILE | |

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date FEB 5 1957

Director A. J. Garcia

Company British-American Oil Co Date Feb. 1, 1957

Address Box 180, Denver 1, Colo Phone No. AC 2 9401

By Marion L. Hoger Title Dist. Supt.
(Signature)

T