




00264495

OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

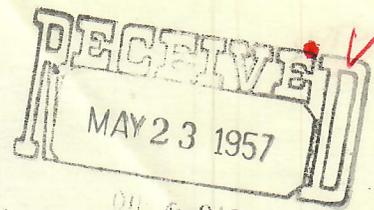

OIL & GAS

CONSERVATION COMMISSION

SUNDRY NOTICES AND REPORTS ON WELLS

INSTRUCTIONS

Notice must be given to the Director, and approval obtained in advance of the time when the owner or operator expects to recomplate or abandon a well or to change plans. Within thirty (30) days after recompletion, change of plans, or remedial work, a detailed report of the work done and the results obtained shall be submitted on this form in duplicate for wells on Patented and Federal lands, and in triplicate for wells on State lands. In work that affects only rods, pumps or tubing or other routine work such as, but not limited to, cleaning out to previous total depth, no report is necessary.

Notice of Intention to Recomplate



Report of Remedial Work



Notice of Intention to Change Plans



Report of Recompletion



Notice of Intention to Abandon Well



Other



(Check appropriate space)

LEASE NAME BRAINERD WELL NO. 1-xFIELD MOUNT HOPE EAST WILDCAT COUNTY LOGANLOCATION NW, SW, Section 28 Township 9 N Range 53 W Meridian 6PM
(Quarter Quarter)2036 feet from South Section Line and 649 feet from West Section Line
N or S E or W

(DETAILS OF WORK)

This well completed as "D" sand producer in March 1954 by means of Baker Model "N" Bridge Plug set at 4917'KB shutting off "J" sand. Well has been shut in since 29th January 1957 as uneconomical to produce. It is now proposed to drill out Bridge Plug, clean out to bottom (5073'KB) and swab test original "J" sand perforations at 4972-76. Sand-oil fracture "J" sand with 8000# sand and 8000 gallons oil, clean out to bottom and swab test for conclusive production.

AJJ	
DVR	
FJK	
WRS	
HHA	
AH	
JJD	✓
FILE	

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:

Company British-American Oil Co Date May 22, 1957

MAY 23 1957

Address Box 180, Denver 1, Colorado Phone No. AC 2 9401

Date

Director

By [Signature] Title Dist. Supt.

(Signature)