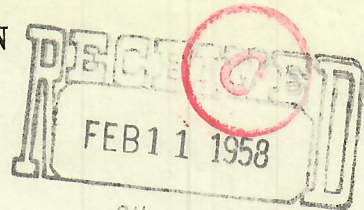


OIL AND GAS CONSERVATION COMMISSION  
OF THE STATE OF COLORADO

## PLUGGING RECORD

OIL & GAS  
CONSERVATION COMMISSION

## INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator The British-American Oil Producing Co. Field Mt. Hope East WilcatLease Name BRAINERD Well No. 1x County LoganLocation NW SW Section 28 Township 9 N Range 53 W Meridian 6PM

(Quarter Quarter)

2036 feet from South Section line and 649 feet from West Section Line  
N or S E or WTOTAL DEPTH 5072'KBDATE OF PLUGGING 2-5-58

## DETAILS OF WORK

Plugged back to 4810'KB with sand & Gravel with 5 sax cement cap. Shot casing off at 3868'KB leaving 1204' casing in hole from 3868 to 5072. Pulled casing from 3868 to GL. Filled hole with heavy mud from 4810 to 285, Rock bridge and 10 sax cement plug from 285 to 245, heavy mud from 245 to 20' and 25 sax cement plug from 20' to within cellar. Erected marker and levelled location.

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	<input checked="" type="checkbox"/>
JJD	<input checked="" type="checkbox"/>
FILE	

P+A oil add

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date FEB 11 1958

Director

Company British-American Oil Date 2-6-58Address Box 180, Denver 1, Colo Phone No. AC 2 9401By Thomas W. Hoyer Title Dist Supt  
(Signature)