


OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

99999999

PLUGGING RECORD

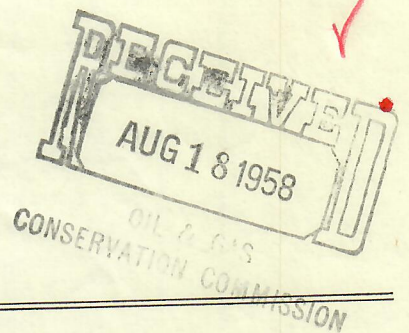

075-06549

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator British-American Oil Producing Company Field _____ Wildcat XX
Lease Name BRITTON Well No. C-1 County Logan
Location SW SW SW Section 7 Township 9 N Range 53 W Meridian 6PM
(Quarter Quarter)
330 feet from South Section line and 330 feet from West Section Line
N or S E or W

TOTAL DEPTH 5195' KBDATE OF PLUGGING 8-13-58

DETAILS OF WORK

Ran Drill Pipe open-ended, filled hole to 5000' with heavy Rotary mud, 50 sax cement plug from 5000' to 4830', heavy Rotary mud from 4830 to 25, 10 sax cement plug from 25 to cellar, erected dry hole marker, filled cellar with soil, levelled and abandoned location.

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	<input checked="" type="checkbox"/>
JJD	<input checked="" type="checkbox"/>
FILE	



00817958

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date AUG 18 1958

Director

Company British-American Oil Co Date 8-14-58Address Box 180, Denver 1, Colo Phone No. AC 2 9401By Wm. M. Hogan Title Dist Supt
(Signature)