


86-555
05-081-6656

VERBAL REQUEST

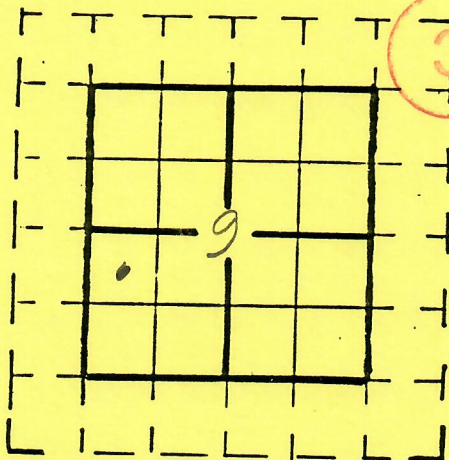

NOTICE OF INTENT TO DRILL _____

NOTICE OF INTENT TO ABANDON ☒

OTHER _____

COMPANY BWRB ADDRESS Dinner

BY Susan PHONE NO. 295-7444 EXT. _____

WELL NO. 9-13 LEASE Rogers/Harris

COUNTY Moffat FIELD Craig South DRLG UNIT _____

LOCATION NW/4 SEC 9 TWP 7N RNGE 90W MERIDIAN _____

_____ ft. from N or S Sec. Line, and _____ ft. from E or W Sec. Line

ESTIMATED DATE OF WORK _____ ESTIMATED TIME _____

DETAILS OF PLAN OF WORK: T.D. 3618 FORMATION _____

SURFACE CASING 8 5/8 @ 1157 - Cemented to surf
5 1/2 @ 3616 - 50 + 350 sks

Perf 3185-3192 - CIBP @ 3150 + 25KS

Perf 2812-2824 - CIBP @ 2802 + 25KS

Perf 2714-2730 - CIBP @ 2700 + 20KS

Perf 1798-1828 -

Set CIBP above 1798 20KS, Cut 8 5/8 + 5 1/2 - 3' below
GL, 150KS 5 1/2, annulus 8 5/8 - 5 1/2, weld plate

BONDING STATUS: PLUGGING _____ SURFACE _____ OTHER _____

Is surface owner also mineral owner? _____

ACREAGE LEASED SURROUNDING DRILLSITE _____

APPROVED BY: DR Bicknell DATE 3/2/87

Completion - 2700' CIBP



00221782